


	Product code: CGE100/M	
	Product name: Equipment management centre for arrow board control with built-in keypad	
	Created: 04/07/2022	By: J-A Roche
	Revised: 30/09/2022	By: J-A Roche
TECHNICAL SHEET	Comment:	

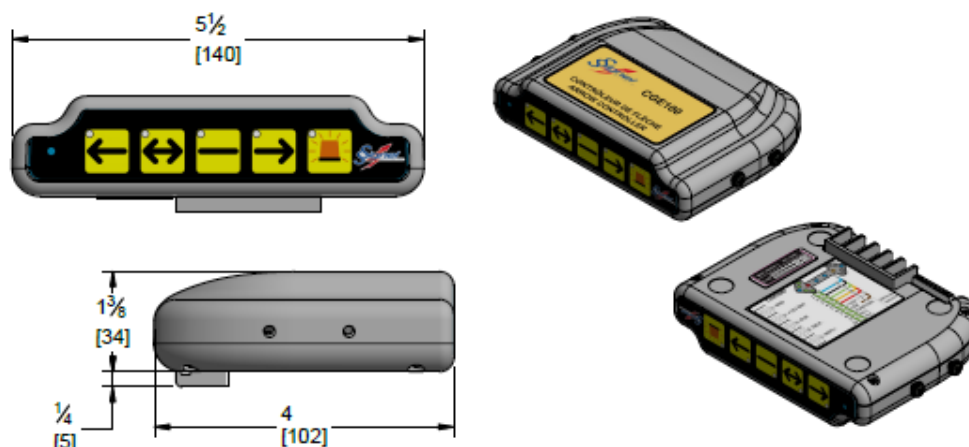

ELECTRICAL SPECIFICATIONS

- Functions activated by touch key, LED indicator on each button, with a confirmation beep.
- Activates an auxiliary accessory such as a beacon, light bar or work light.
- Automatic intensity control by external (on arrow) or internal (on housing) photocell.
- Automatic arrow brightness, day or night.
- Controller operation tied to the ignition signal or battery voltage.
- Supply voltage between 10.5 and 15V; flashes on low battery.
- Arrow flash rate of 30 cycles/minute, i.e. 1000ms on / 1000ms off.
- Current draw when off below 15mA.
- Motorized mount control included or not, depending on the model.
- Speed read over CANBUS to prevent use while moving.
- Functions programmed directly on the keypad:
 - Raising and lowering time of the motorized mount;
 - Enabling/disabling the ignition or battery signal;
 - Adjusting the low-battery threshold;
 - Photocell read on the arrow or on the housing;
 - Arrow flash rate, day or night mode;
 - CAN signal reading. Speed limit for lowering the arrow.

Voltage 12VDC	Description	CGE100	CGE100M
Inputs	Power and return, fuse-protected at the source	40A	
	Arrow photocell (LDR)	≤15mA	
	Ignition (IGN)	≤1mA	
	Speed signal (CANH and CANL)	ND	SAE
Outputs	Arrow power, transistor protected	12A	
	Arrow lamp circuits, transistor protected	4A	
	Auxiliary accessory, transistor protected	5A	
	Motor, up and down (MOT+ / MOT-), transistor protected	ND	20A

	Product code: CGE100/M	
	Product name: Equipment management centre for arrow board control with built-in keypad	
	Created: 04/07/2022	By: J-A Roche
	Revised: 30/09/2022	By: J-A Roche
TECHNICAL SHEET	Comment:	

MECHANICAL SPECIFICATIONS

- Black ABS housing.
- Stainless steel mounting bracket
- Screw terminals for all connections.
- Dimensions: 5-1/2"L X 4"D X 1-5/8"H (140 X 102 X 39mm).
- Operating temperature: -40°C to 50°C
- Weight: 0.55lb (250 g)

CODES ET OPTIONS

À la carte.

Code	Description
CGE100	Fixed arrow controller and one auxiliary accessory
CGE100M	Motorized arrow controller and one auxiliary accessory
CGEOP-CAN	Vehicle CANBUS connection option

Sales kits.

Code	Description	Controller	Support	Arrow
FSC 100 0	Halogen lamp arrow and controller CGE100	CGE100	NA	SFS80
FSC 100 0 L4	40-LED lamp arrow and controller CGE100	CGE100	NA	SFS80L4
FSC 100 1	Halogen lamp arrow, controller CGE100M and heavy-duty mount SBM10	CGE100M	SBM10	SFS80
FSC 100 1 L4	40-LED lamp arrow, controller CGE100M heavy-duty mount SBM10	CGE100M	SBM10	SFS80L4
FSC 100 2	Halogen lamp arrow, controller CGE100M and low-profile mount SBM22	CGE100M	SBM22	SFS80
FSC 100 2 L4	40-LED lamp arrow, controller CGE100M and low-profile mount SBM22	CGE100M	SBM22	SFS80L4

Sales kits include a 10' / 3m power cable rated for 50A. The fuse required for the load is not supplied and remains the installer's responsibility.

Kits that include a motorized mount come with a 20' / 6m interconnect cable.

Ask us for the lengths that suit your needs.