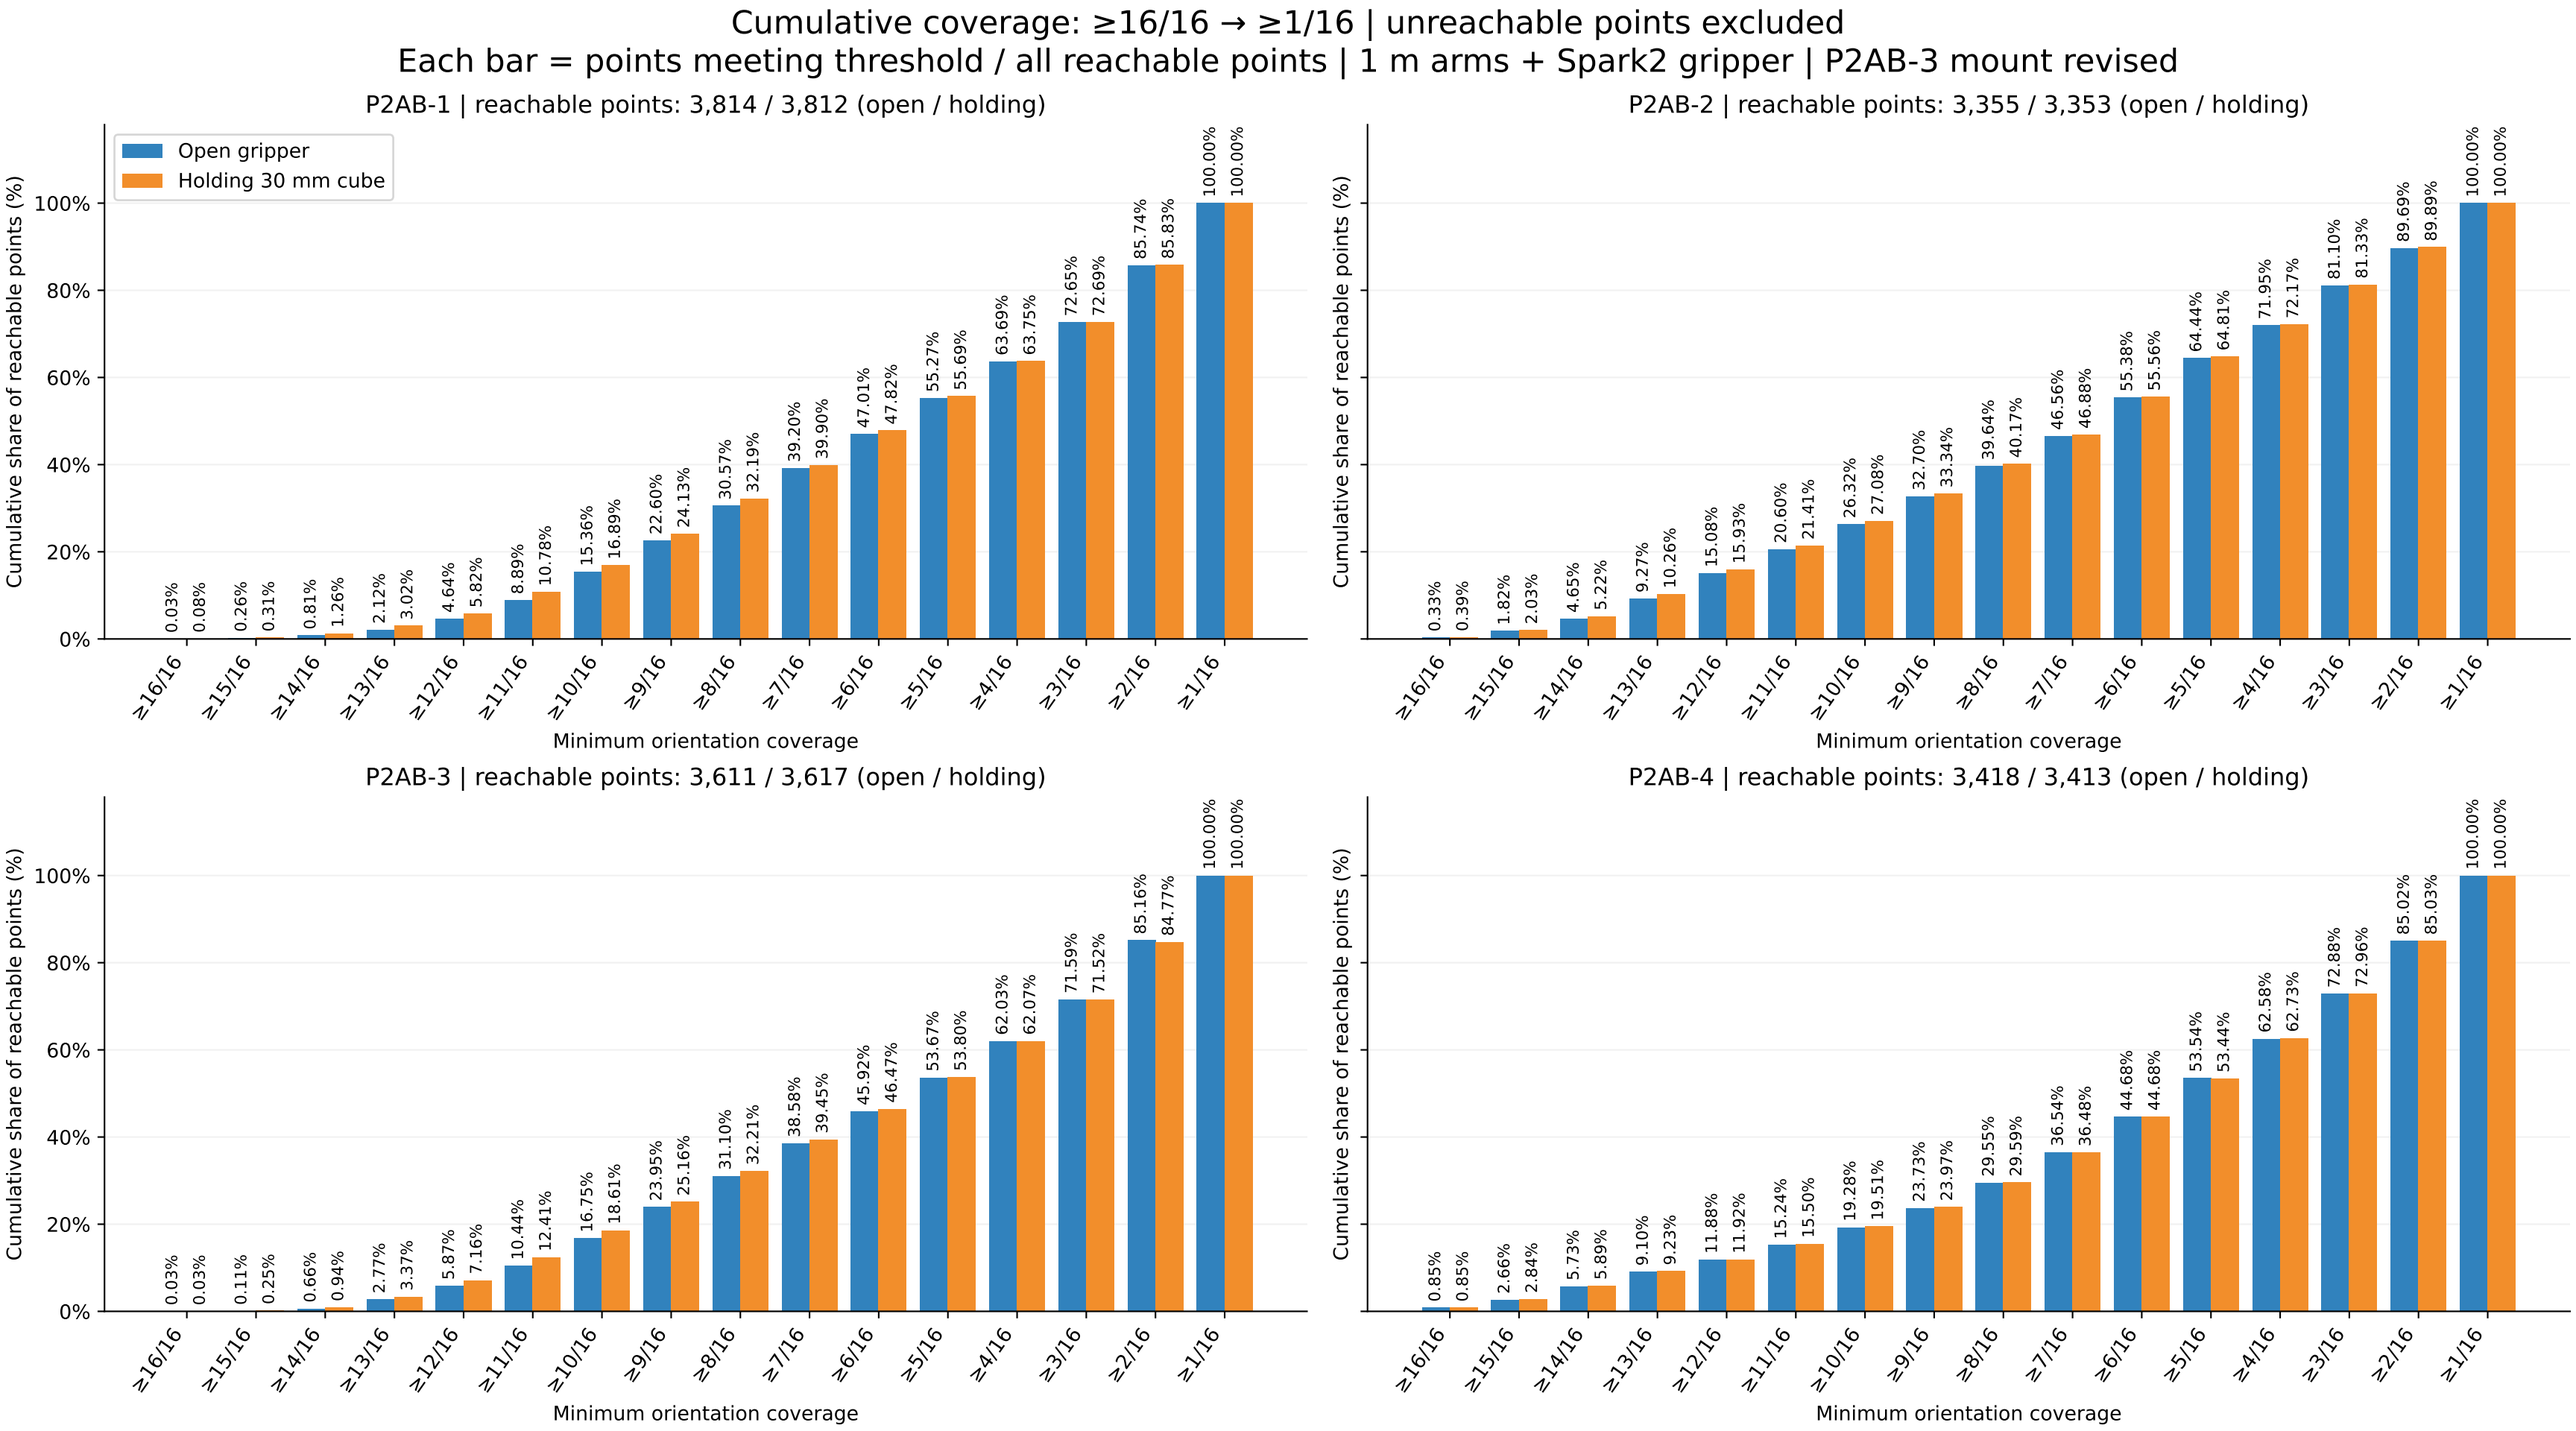
Cumulative coverage: ≥16/16 → ≥1/16 | unreachable points excluded
Each bar = points meeting threshold / all reachable points | 1 m arms + Spark2 gripper | P2AB-3 mount revised
P2AB-1 | reachable points: 3,814 / 3,812 (open / holding)
P2AB-2 | reachable points: 3,355 / 3,353 (open / holding)
P2AB-3 | reachable points: 3,611 / 3,617 (open / holding)
P2AB-4 | reachable points: 3,418 / 3,413 (open / holding)
Open gripper
Holding 30 mm cube
Cumulative share of reachable points (%)
Minimum orientation coverage
≥16/16
≥15/16
≥14/16
≥13/16
≥12/16
≥11/16
≥10/16
≥9/16
≥8/16
≥7/16
≥6/16
≥5/16
≥4/16
≥3/16
≥2/16
≥1/16