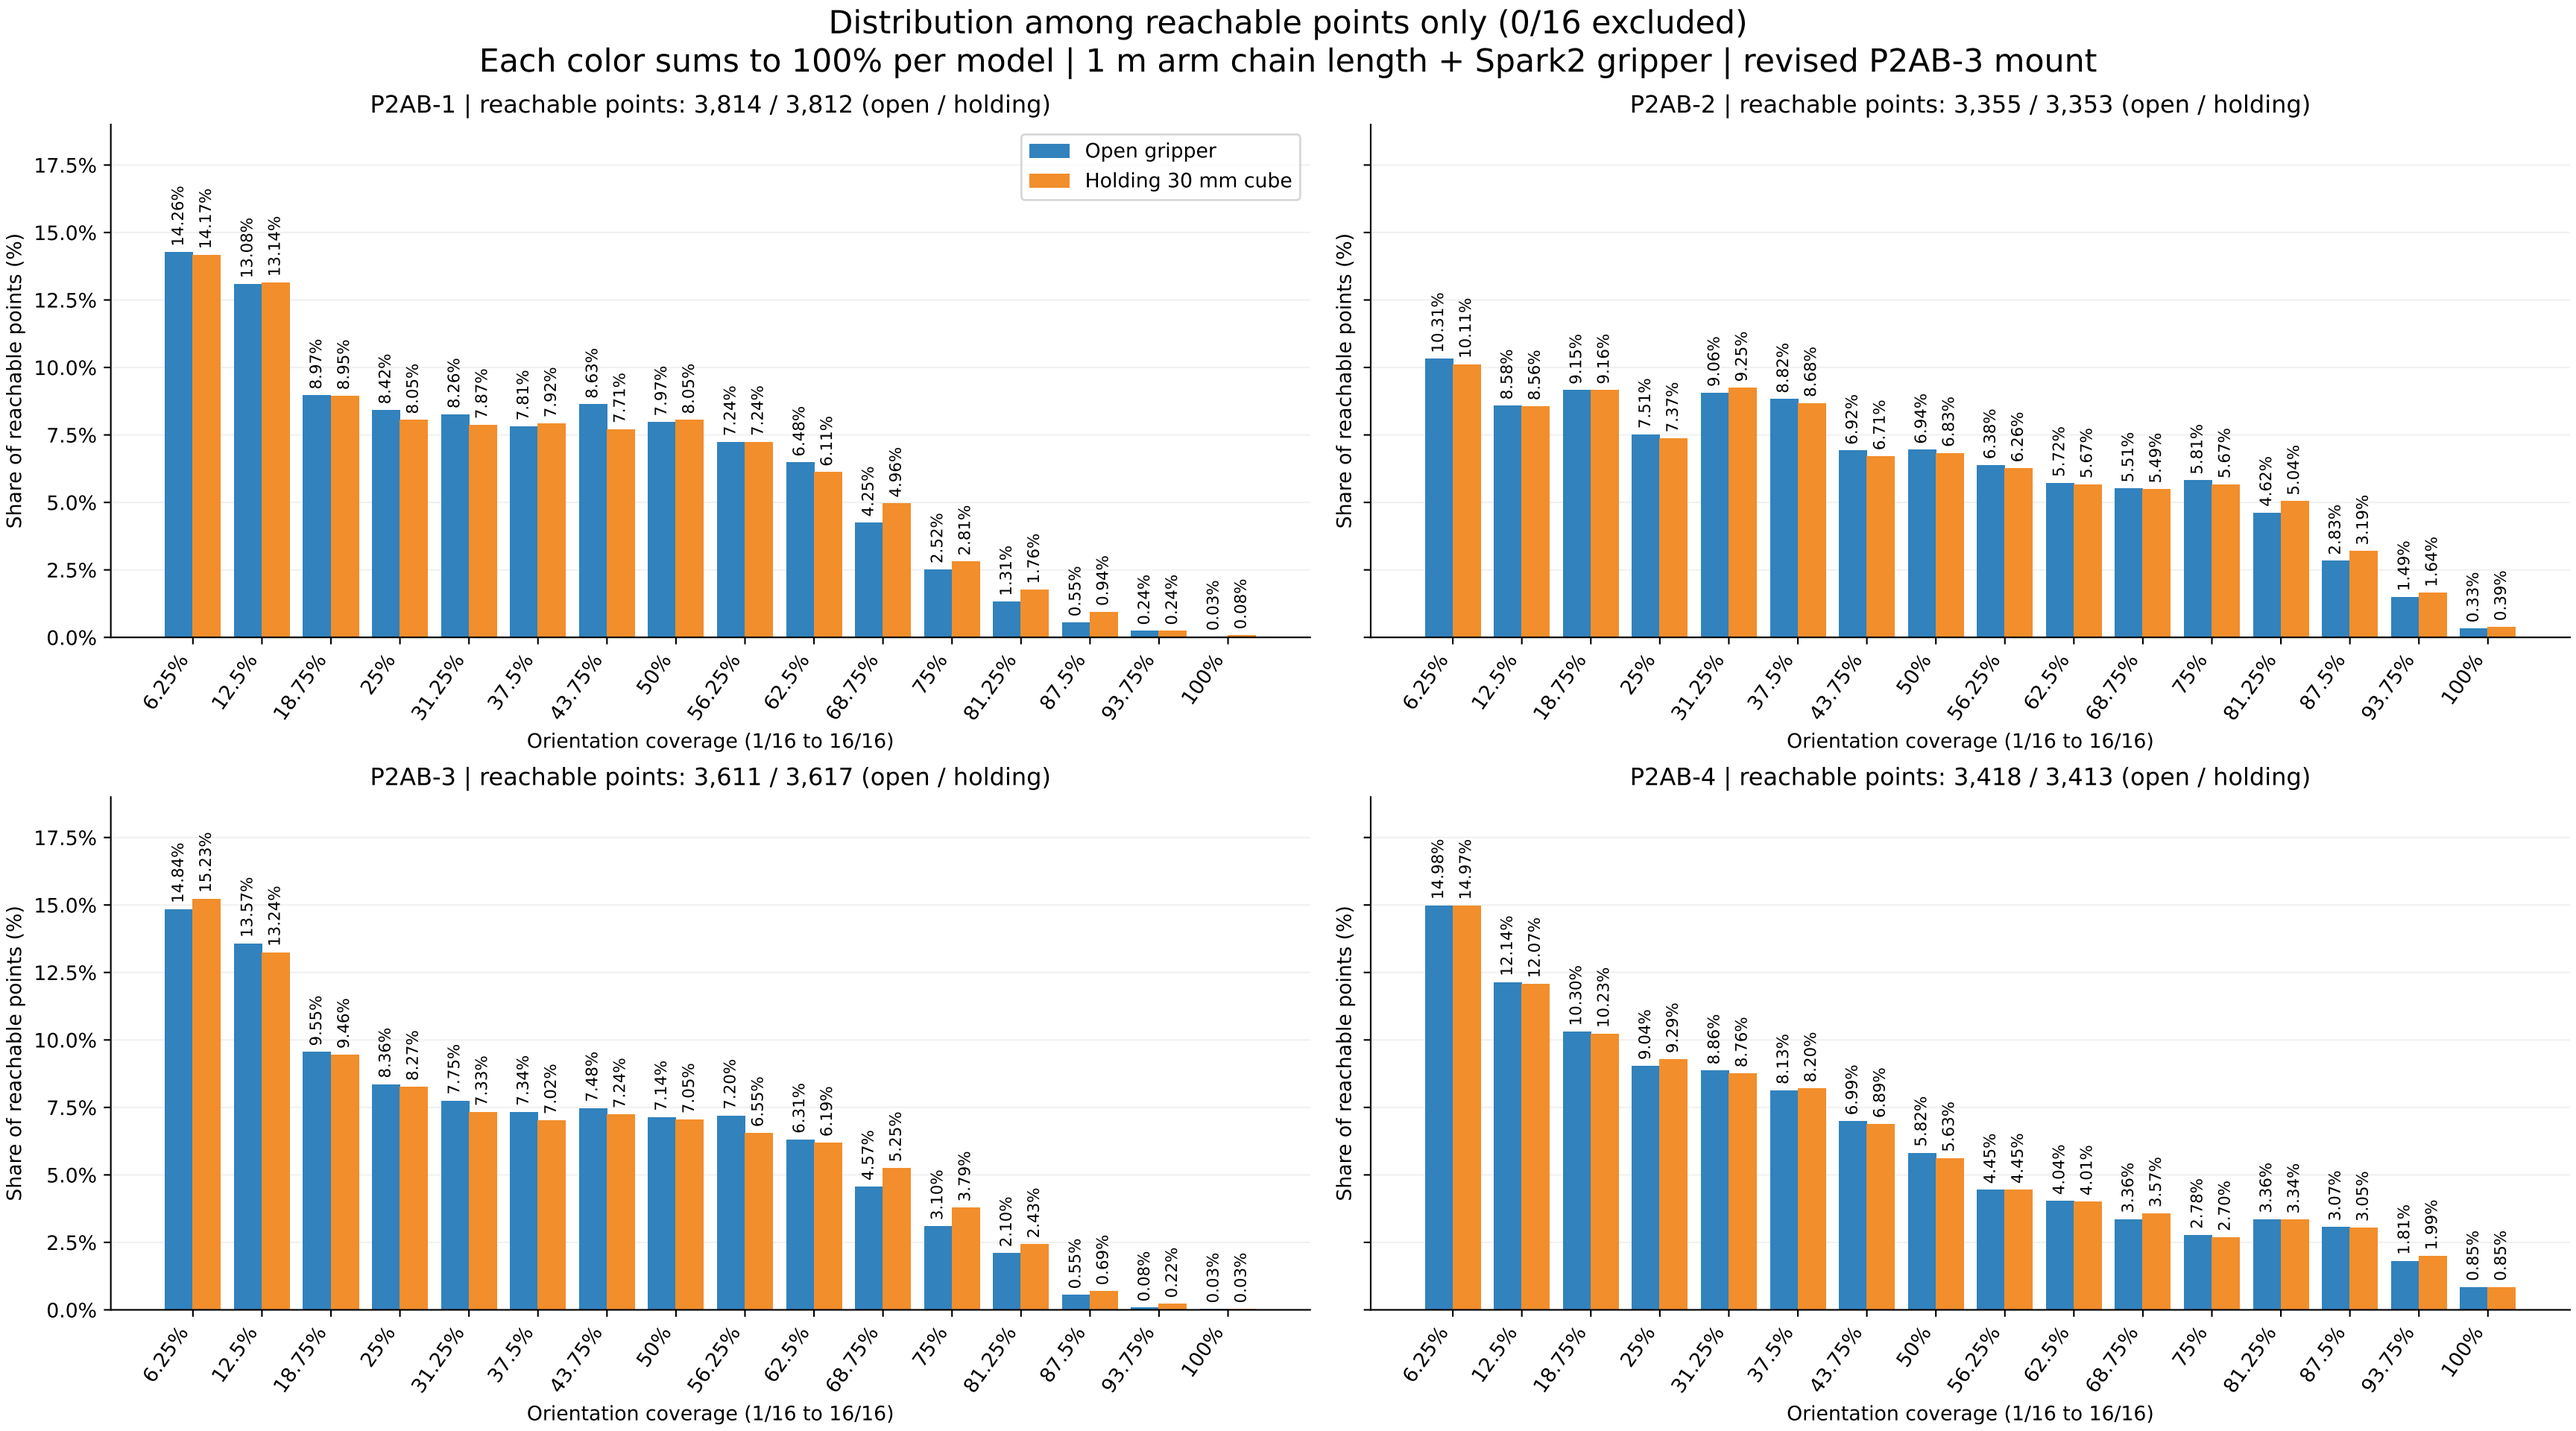
Distribution among reachable points only (0/16 excluded)
Each color sums to 100% per model | 1 m arm chain length + Spark2 gripper | revised P2AB-3 mount
P2AB-1 | reachable points: 3,814 / 3,812 (open / holding)
P2AB-2 | reachable points: 3,355 / 3,353 (open / holding)
P2AB-3 | reachable points: 3,611 / 3,617 (open / holding)
P2AB-4 | reachable points: 3,418 / 3,413 (open / holding)
Open gripper
Holding 30 mm cube
Share of reachable points (%)
Orientation coverage (1/16 to 16/16)
6.25%
12.5%
18.75%
25%
31.25%
37.5%
43.75%
50%
56.25%
62.5%
68.75%
75%
81.25%
87.5%
93.75%
100%