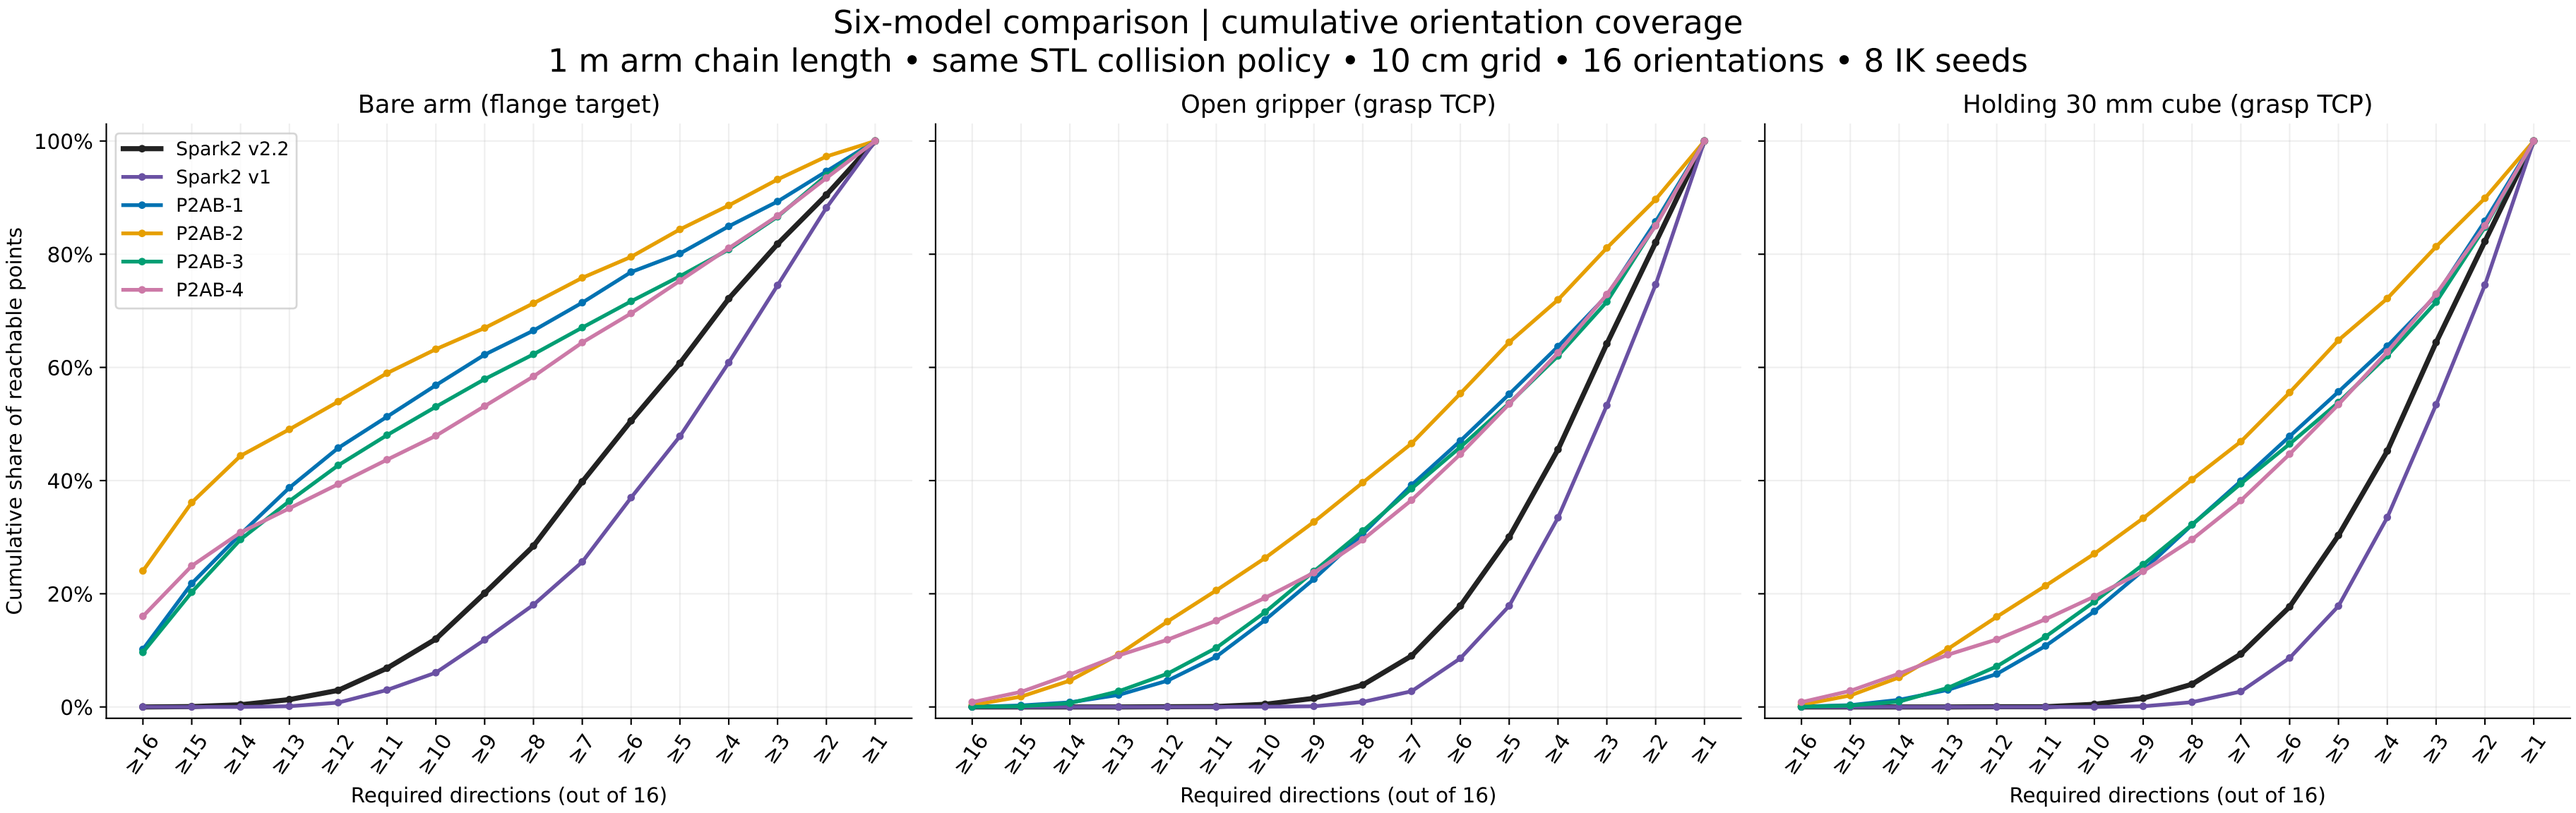
Six-model comparison | cumulative orientation coverage
1 m arm chain length • same STL collision policy • 10 cm grid • 16 orientations • 8 IK seeds
Bare arm (flange target)
Open gripper (grasp TCP)
Holding 30 mm cube (grasp TCP)
Spark2 v2.2
Spark2 v1
P2AB-1
P2AB-2
P2AB-3
P2AB-4
Cumulative share of reachable points
100%
80%
60%
40%
20%
0%
≥16
≥15
≥14
≥13
≥12
≥11
≥10
≥9
≥8
≥7
≥6
≥5
≥4
≥3
≥2
≥1
Required directions (out of 16)