


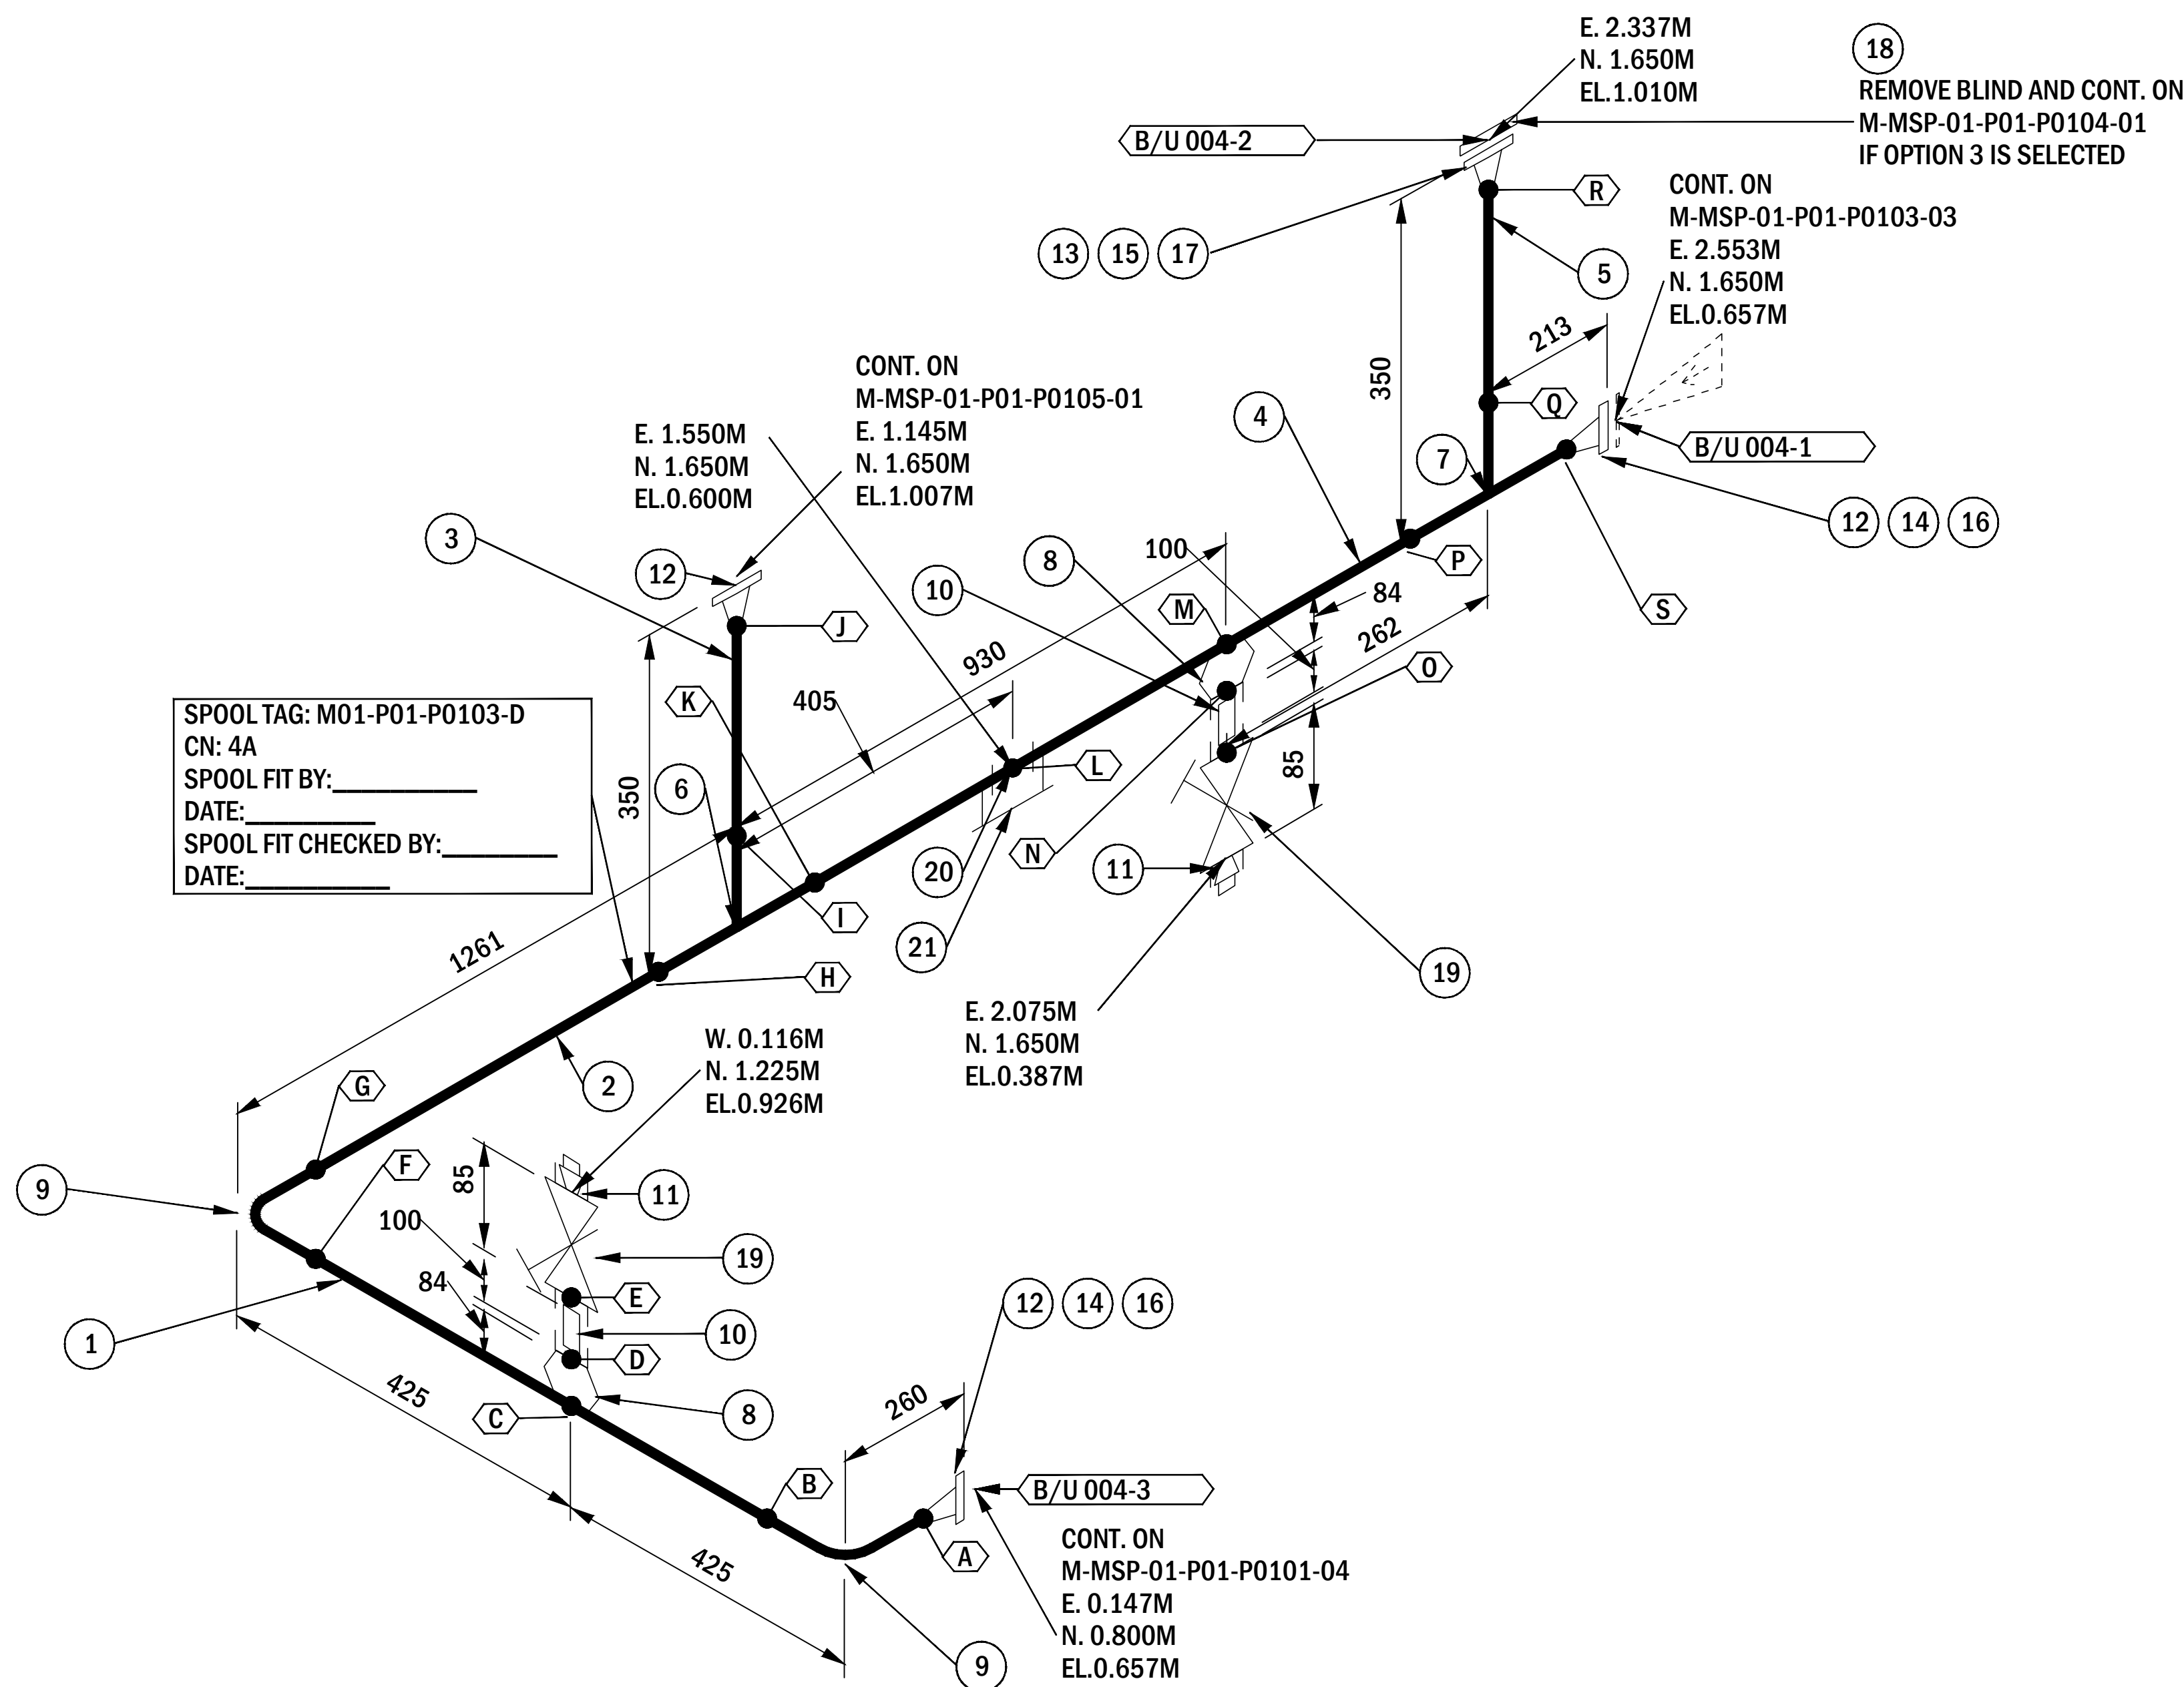

HEAT NO.	MK.	QTY.	SIZE	ITEM DESCRIPTION	WGT. (KG)	TAG
	1	0.546 m	114	PIPE, XH, ASTM A106 GR B SMLS, ASME B36.10, NACE MR0175/ISO 15156	12.2	
	2	1.005 m	114	PIPE, XH, ASTM A106 GR B SMLS, ASME B36.10, NACE MR0175/ISO 15156	22.5	
	3	0.137 m	114	PIPE, XH, ASTM A106 GR B SMLS, ASME B36.10, NACE MR0175/ISO 15156	3.1	
	4	0.981 m	114	PIPE, XH, ASTM A106 GR B SMLS, ASME B36.10, NACE MR0175/ISO 15156	21.9	
	5	0.163 m	89	PIPE, XH, ASTM A106 GR B SMLS, ASME B36.10, NACE MR0175/ISO 15156	2.5	
	6	1	114X114	TEE, STRAIGHT, BW, XH, ASTM A234 WPB, ASME B16.9, NACE MR0175/ISO 15156	5.6	
	7	1	114X89	TEE, REDUCING, BW, XH/XH, ASTM A234 WPB, ASME B16.9, NACE MR0175/ISO 15156	5.2	
	8	2	114X33	BRANCHED OUTLET, SW, CL6000, ASTM A105N, MSS SP-97, NACE MR0175/ISO 15156	1.2	
	9	2	114	ELBOW, 90° LR, BW, XH, ASTM A234 WPB, ASME B16.9, NACE MR0175/ISO 15156	10.7	
	10	2	33	NIPPLE, SCH 160, ASTM A106 GR B SMLS, ASME B36.10, NACE MR0175/ISO 15156 PBE (100 MM LG)	3.4	
	11	2	33	PLUG, HEX HEAD, ASTM A105N, ASME B16.11, NACE MR0175/ISO 15156	0.7	
	12	3	114	FLANGE, WN, CL600 RF, XH, ASTM A105N, ASME B16.5, NACE MR0175/ISO 15156	50.4	
	13	1	89	FLANGE, WN, CL600 RF, XH, ASTM A105N, ASME B16.5, NACE MR0175/ISO 15156	8.2	
	14	2	114	GASKET, CL600, 3.2mm THK, SPIRAL WOUND 316SS GRAPHITE FILLED WINDINGS c/w 316SS INNER RING & CS OUTER CENTERING RING, ASME B16.20, NACE MR0175/ISO 15156	2.0	
	15	1	89	GASKET, CL600, 3.2mm THK, SPIRAL WOUND 316SS GRAPHITE FILLED WINDINGS c/w 316SS INNER RING & CS OUTER CENTERING RING, ASME B16.20, NACE MR0175/ISO 15156	1.0	
	16	16	7/8X5 3/4	STUD, ASTM A193 GR B7M c/w (2) HEAVY HEX NUT, ASTM A194 GR 2HM, ASME B18.2.1/B18.31.2/B18.2.2, NACE MR0175/ISO 15156	2.0	
	17	8	3/4X5	STUD, ASTM A193 GR B7M c/w (2) HEAVY HEX NUT, ASTM A194 GR 2HM, ASME B18.2.1/B18.31.2/B18.2.2, NACE MR0175/ISO 15156	1.0	
	18	1	89	FLANGE, BLIND, CL600 RF, ASTM A105N, ASME B16.5, NACE MR0175/ISO 15156	9.1	
	19	2	33	VALVE, GATE, SW X THRD, CL800	9.6	33GA-C4-C5
	20	1	114	ANCHOR A3	1.0	A3
	21	1	114	PIPE SHOE S1B2	6.0	S1B2

1. DIMENSIONS DO NOT INCLUDE GASKETS.
2. DIMENSIONS INCLUDE A 0mm WELD GAP AT ALL BUTT WELDS UNLESS THE WELD GAP IS SHOWN SEPARATELY.
3. SEE SCOVAN LINE LIST FOR CODE OF CONSTRUCTION, NDE AND HYDROSTATIC TESTING REQUIREMENTS.
4. NPS 1.5 AND LESS DIMENSIONS TO BE CONFIRMED PRIOR TO FABRICATION.
5. ALL SCOVAN TAGS AND LINE NUMBERS EXCLUDING MANUAL VALVES WILL HAVE THE PREFIX "PRD0154".

MK.	TYPE	WELDER	WPS	DATE	MK.	TYPE	WELDER	WPS	DATE	MK.	TYPE	WELDER	WPS	DATE	MK.	TYPE	WELDER	WPS	DATE	MK.	TYPE	WELDER	WPS	DATE	
A	BW				F	BW				K	BW				P	BW									
B	BW				G	BW				L	ATT				Q	BW									
C	OLET				H	BW				M	OLET				R	BW									
D	SW				I	BW				N	SW				S	BW									
E	SW				J	BW				O	SW														