


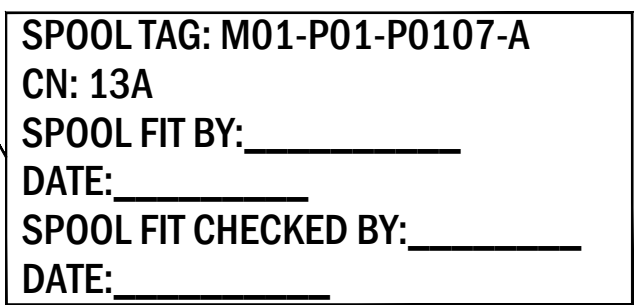

1. DIMENSIONS DO NOT INCLUDE GASKETS.
2. DIMENSIONS INCLUDE A 0mm WELD GAP AT ALL BUTT WELDS UNLESS THE WELD GAP IS SHOWN SEPARATELY.
3. SEE SCOVAN LINE LIST FOR CODE OF CONSTRUCTION, NDE AND HYDROSTATIC TESTING REQUIREMENTS.
4. NPS 1.5 AND LESS DIMENSIONS TO BE CONFIRMED PRIOR TO FABRICATION.
5. ALL SCOVAN TAGS AND LINE NUMBERS EXCLUDING MANUAL VALVES WILL HAVE THE PREFIX "PRD0154".

HEAT NO.	MK.	QTY.	SIZE	ITEM DESCRIPTION	WGT. (KG)	TAG
	1	1.808 m	33	PIPE, SCH 160, ASTM A333 GR 6 SMLS, ASME B36.10, NACE MR0175/ISO 15156	7.7	
	2	1	33	NIPPLE, SCH 160, ASTM A333 GR 6 SMLS, ASME B36.10, NACE MR0175/ISO 15156 PBE (100 MM LG)	1.7	
	3	2	33	FLANGE, SW, CL600 RF, SCH 160, ASTM A350 GR LF2 CL1, ASME B16.5, NACE MR0175/ISO 15156	3.7	
	4	1	33	GASKET, CL600, 3.2mm THK, SPIRAL WOUND 316SS GRAPHITE FILLED WINDINGS c/w 316SS INNER RING & CS OUTER CENTERING RING, ASME B16.20, NACE MR0175/ISO 15156	1.0	
	5	4	5/8X3/4	STUD, ASTM A193 GR B7M c/w (2) HEAVY HEX NUT, ASTM A194 GR 2HM, ASME B18.2.1/B18.31.2/B18.2.2, NACE MR0175/ISO 15156	1.3	
	6	1	33	VALVE, NEEDLE, SW, 6000PSIG	0.6	33NE-C3-S50
	7	1	33	PIPE SHOE S3A1	6.0	S3A1
TOTAL WGT: 22						

[illegible]