


USB-C receptacle, CC pull-downs (USB-C sink), ESD protection

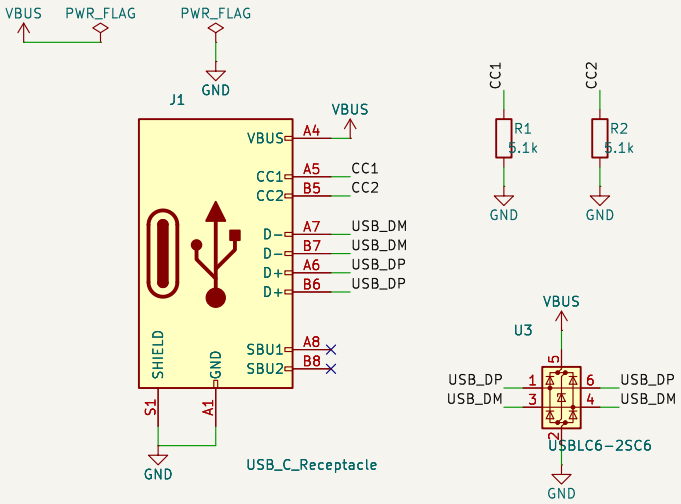


STM32F042K6T6: crystal-less USB full-speed device

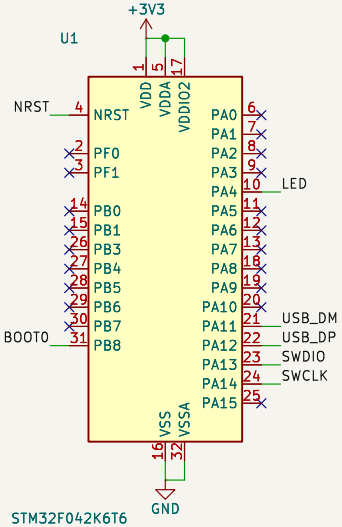


BOOT button (hold while plugging in: USB DFU bootloader)




Status LED (PA4, active high)




SWD: ARM Cortex 10-pin, 1.27 mm



3.3 V supply (bus powered)

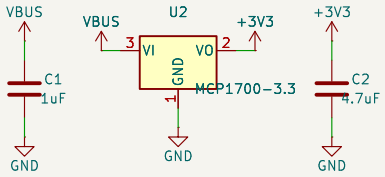

Decoupling: C3 VDD, C4 VDDIO2, C5+C6 VDDA, C7 NRST

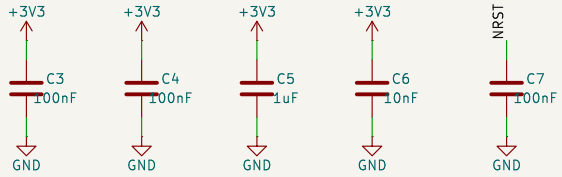

Generated by hardware/skidl/iv_dcy.py
Hardware: CERN-OHL-S-2.0
USB 2.0 full-speed CDC-ACM device, VID 0x1209

Sheet: /
File: iv_dcy.kicad_sch

Title: IV-DCY USB reference board

Size: A4	Date:	**Rev: 1.0**
KiCad E.D.A. 9.0.9		Id: 1/1