SPEChpc™ 2021 Tiny Result

Copyright 2021-2025 Standard Performance Evaluation Corporation

HKUST HPC Infra. Center: Dell AMD 9754	SPEChpc 2021_tny_base = 12.8

(Test Sponsor: The Hong Kong University of Science and Technology)

Dell PowerEdge R6625
AMD EPYC 9754 (2 x 128-Core)

SPEChpc 2021_tny_peak = Not Run

hpc2021 License:	7401	**Test Date:**	Dec-2025
Test Sponsor:	The Hong Kong University of Science and Technology	**Hardware Availability:**	Sep-2024
Tested by:	Information Technology Services Office	**Software Availability:**	Sep-2024

SPEChpc 2021_tny_base (12.8)

Results Table

Benchmark	Base									Peak									
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
505.lbm_t	MPI	256	1	**108**	**20.8**	107	21.1	113	19.9									
513.soma_t	MPI	256	1	**269**	**13.8**	269	13.8	269	13.8									
518.tealeaf_t	MPI	256	1	**235**	**7.03**	235	7.02	235	7.03									
519.clvleaf_t	MPI	256	1	240	6.86	241	6.86	**241**	**6.86**									
521.miniswp_t	MPI	256	1	190	8.44	186	8.59	**187**	**8.54**									
528.pot3d_t	MPI	256	1	315	6.75	318	6.67	**316**	**6.73**									
532.sph_exa_t	MPI	256	1	**106**	**18.5**	105	18.5	106	18.4									
534.hpgmgfv_t	MPI	256	1	142	8.28	141	8.33	**142**	**8.29**									
535.weather_t	MPI	256	1	43.2	74.7	**42.3**	**76.2**	42.1	76.7									
			SPEChpc 2021_tny_base =		**12.8**														
			SPEChpc 2021_tny_peak =		**Not Run**														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Standard Performance Evaluation Corporation (info@spec.org)   https://www.spec.org/

SPEChpc™ 2021 Tiny Result

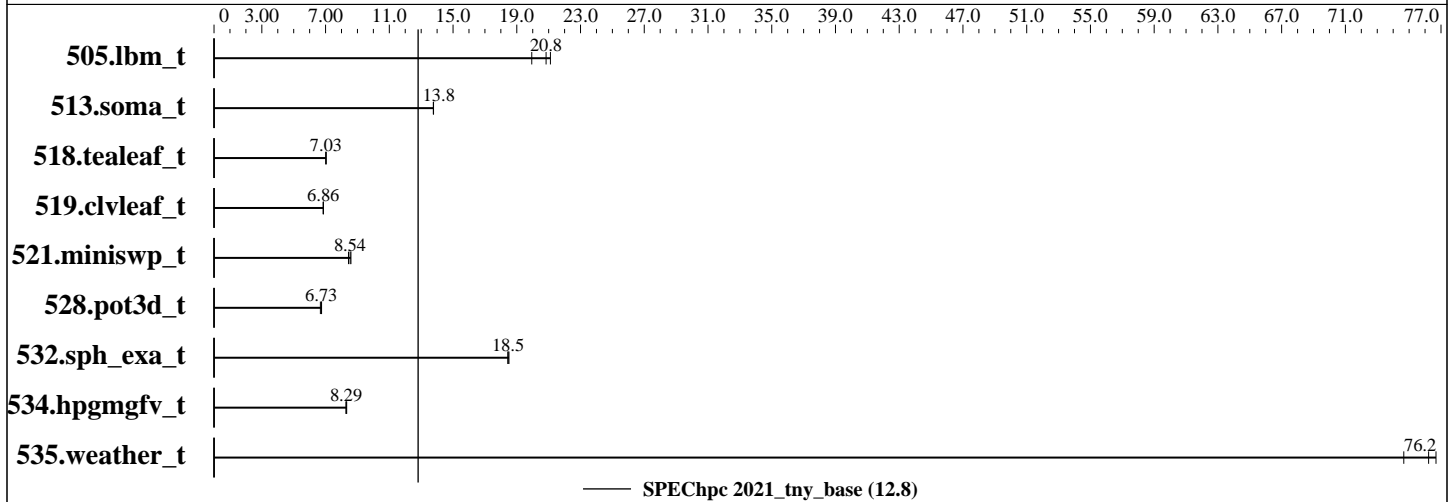|	
HKUST HPC Infra. Center: Dell AMD 9754 (Test Sponsor: The Hong Kong University of Science and Technology) Dell PowerEdge R6625 AMD EPYC 9754 (2 x 128-Core)	SPEChpc 2021_tny_base = 12.8 SPEChpc 2021_tny_peak = Not Run

hpc2021 License:	7401	**Test Date:**	Dec-2025
Test Sponsor:	The Hong Kong University of Science and Technology	**Hardware Availability:**	Sep-2024
Tested by:	Information Technology Services Office	**Software Availability:**	Sep-2024

Hardware Summary

Type of System:	SMP
Compute Node:	DELL PowerEdge R6625 (AMD EPYC 9754)
Interconnect:	Cisco Nexus 9332D-GX2B
Compute Nodes Used:	1
Total Chips:	2
Total Cores:	256
Total Threads:	512
Total Memory:	768 GB
Total Accelerators:	0
Max. Peak Threads:	--

Software Summary

Compiler:	Intel(R) oneAPI DPC++/C++ Compiler 2025.0.4.20241205
MPI Library:	Intel(R) MPI Library for Linux* OS 2021.14.20250213-0d7f579
Other MPI Info:	--
Other Software:	--
Base Parallel Model:	MPI
Base Ranks Run:	256
Base Threads Run:	1
Peak Parallel Models:	Not Run
Minimum Peak Ranks:	--
Maximum Peak Ranks:	--
Max. Peak Threads:	--
Min. Peak Threads:	--

Node Description: DELL PowerEdge R6625 (AMD EPYC 9754)

Hardware

Number of nodes:	1
Uses of the node:	Compute
Vendor:	Dell Inc.
Model:	Dell PowerEdge R6625
CPU Name:	AMD EPYC 9754
CPU(s) orderable:	2 chips
Chips enabled:	2
Cores enabled:	256
Cores per chip:	128
Threads per core:	2
CPU Characteristics:	Base 2.25 GHz, Boost up to 3.1 GHz
CPU MHz:	2250
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	256 MB I+D on chip per chip
	16 MB shared / 8 cores
Other Cache:	None
Memory:	768 GB (24 x 32 GB DDR5-4800 at 4800MHz)
Disk Subsystem:	2 x 2 TB SAS SSD (Raid 1)
Other Hardware:	Immersion Cooling (Direct Liquid Cooling)
Accel Count:	--
Accel Model:	--
Accel Vendor:	--
Accel Type:	--
Accel Connection:	--
Accel ECC enabled:	--
Accel Description:	--
Adapter:	Mellanox ConnectX-6 HDR MT28908
Number of Adapters:	1
Slot Type:	PCIe 4.0 x16

Software

Accelerator Driver:	None
Adapter:	Mellanox ConnectX-6 HDR MT28908
Adapter Driver:	24.10-2.1.8.0
Adapter Firmware:	20.41.1000
Operating System:	Rocky Linux 9.5
	5.14.0-503.40.1.el9_5.x86_64
	-
Local File System:	tmpfs
Shared File System:	Dell OneFS via NFS v3
System State:	Run level 5
Other Software:	None

(Continued on next page)

SPEChpc™ 2021 Tiny Result

Copyright 2021-2025 Standard Performance Evaluation Corporation

HKUST HPC Infra. Center: Dell AMD 9754	SPEChpc 2021_tny_base =	12.8

(Test Sponsor: The Hong Kong University of Science and Technology)

Dell PowerEdge R6625
AMD EPYC 9754 (2 x 128-Core)

SPEChpc 2021_tny_peak = Not Run

hpc2021 License:	7401	**Test Date:**	Dec-2025
Test Sponsor:	The Hong Kong University of Science and Technology	**Hardware Availability:**	Sep-2024
Tested by:	Information Technology Services Office	**Software Availability:**	Sep-2024

Node Description: DELL PowerEdge R6625 (AMD EPYC 9754)

Hardware (Continued)

Data Rate:	200 Gbit/s
Ports Used:	1
Interconnect Type:	RoCE v2

Interconnect Description: Cisco Nexus 9332D-GX2B

Hardware

Vendor:	Cisco
Model:	Cisco Nexus 9332D-GX2B
Switch Model:	RoCE v2 Ethernet Switch
Number of Switches:	
Number of Ports:	32
Data Rate:	400 Gbit/s
Firmware:	--
Topology:	--
Primary Use:	MPI & RDMA Traffic, NFS

Software

: --

Submit Notes

```
The config file option 'submit' was used.
 mpirun -genvall -np ${ranks} numactl -l $command
```

General Notes

```
Environment variables set by runhpc before the start of the run:
I_MPI_PIN = "1"
I_MPI_PIN_CELL = "core"
I_MPI_PIN_PROCESSOR_LIST = "all"
I_MPI_PIN_RESPECT_HCA = "0"
I_MPI_PMI_LIBRARY = "/usr/lib64/libpmix.so.2"
```

Compiler Version Notes

```
==============================================================================
 CXXC 532.sph_exa_t(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler 2025.0.4 (2025.0.4.20241205)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir:
  /opt/shared/.spack-edge/opt/spack/linux-rocky9-x86_64_v4/gcc-11.5.0.spack/intel-oneapi-compilers-2025.0.4-sn26au2eyxigpsati3gb5oxmtku6s5uo/compiler/2025.0/bin/compiler
```

(Continued on next page)

SPEChpc™ 2021 Tiny Result

Copyright 2021-2025 Standard Performance Evaluation Corporation

HKUST HPC Infra. Center: Dell AMD 9754
(Test Sponsor: The Hong Kong University of Science and Technology)

Dell PowerEdge R6625
AMD EPYC 9754 (2 x 128-Core)

SPEChpc 2021_tny_base =   12.8

SPEChpc 2021_tny_peak = Not Run

hpc2021 License:	7401	**Test Date:**	Dec-2025
Test Sponsor:	The Hong Kong University of Science and Technology	**Hardware Availability:**	Sep-2024
Tested by:	Information Technology Services Office	**Software Availability:**	Sep-2024

Compiler Version Notes (Continued)

```
Configuration file:
   /opt/shared/.spack-edge/opt/spack/linux-rocky9-x86_64_v4/gcc-11.5.0.spack/intel-oneapi-compilers-2025.0.4-sn26au2eyxigpsati3gb5oxmtku6s5uo/compiler/2025.0/bin/compiler/../icpx.cfg
   ------------------------------------------------------------------------


   ==============================================================================
   CC   505.lbm_t(base) 513.soma_t(base) 518.tealeaf_t(base) 521.miniswp_t(base)
        534.hpgmgfv_t(base)
   ------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler 2025.0.4 (2025.0.4.20241205)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir:
   /opt/shared/.spack-edge/opt/spack/linux-rocky9-x86_64_v4/gcc-11.5.0.spack/intel-oneapi-compilers-2025.0.4-sn26au2eyxigpsati3gb5oxmtku6s5uo/compiler/2025.0/bin/compiler
Configuration file:
   /opt/shared/.spack-edge/opt/spack/linux-rocky9-x86_64_v4/gcc-11.5.0.spack/intel-oneapi-compilers-2025.0.4-sn26au2eyxigpsati3gb5oxmtku6s5uo/compiler/2025.0/bin/compiler/../icx.cfg
   ------------------------------------------------------------------------


   ==============================================================================
   FC   519.clvleaf_t(base) 528.pot3d_t(base) 535.weather_t(base)
   ------------------------------------------------------------------------
ifx (IFX) 2025.0.4 20241205
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
   ------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
```
mpiicc -cc=icx
```

C++ benchmarks:
```
mpiicpc -cxx=icpx
```

Fortran benchmarks:
```
mpiifort -fc=ifx
```

Base Portability Flags

505.lbm_t: `-lstdc++`
513.soma_t: `-lstdc++`
518.tealeaf_t: `-lstdc++`
521.miniswp_t: `-lstdc++`
532.sph_exa_t: `-std=c++14 -lstdc++`
534.hpgmgfv_t: `-lstdc++`

SPEChpc™ 2021 Tiny Result

Copyright 2021-2025 Standard Performance Evaluation Corporation

HKUST HPC Infra. Center: Dell AMD 9754	SPEChpc 2021_tny_base = 12.8
(Test Sponsor: The Hong Kong University of Science and Technology)	
Dell PowerEdge R6625	SPEChpc 2021_tny_peak = Not Run
AMD EPYC 9754 (2 x 128-Core)	

hpc2021 License:	7401	**Test Date:**	Dec-2025
Test Sponsor:	The Hong Kong University of Science and Technology	**Hardware Availability:**	Sep-2024
Tested by:	Information Technology Services Office	**Software Availability:**	Sep-2024

Base Optimization Flags

C benchmarks:
```
-march=common-avx512 -Ofast -flto -ffast-math
-mprefer-vector-width=512 -ansi-alias
```

C++ benchmarks:
```
-march=common-avx512 -Ofast -flto -ffast-math
-mprefer-vector-width=512 -ansi-alias
```

Fortran benchmarks:
```
-march=common-avx512 -Ofast -flto -ffast-math
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array64byte
```

Base Other Flags

C benchmarks:
```
-Wno-incompatible-function-pointer-types
```

C++ benchmarks:
```
-Wno-incompatible-function-pointer-types
```

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEChpc2021 v1.1.10 on 2025-12-22 11:54:47+0800.
Report generated on 2025-12-22 13:19:57 by hpc2021 PDF formatter v112.