


**5 V harness: J\_OUT (Micro-Fit 3.0, 4 ckt) -> Raspberry Pi 5 GPIO header [RC2 - terminal and wire part numbers to be confirmed]**

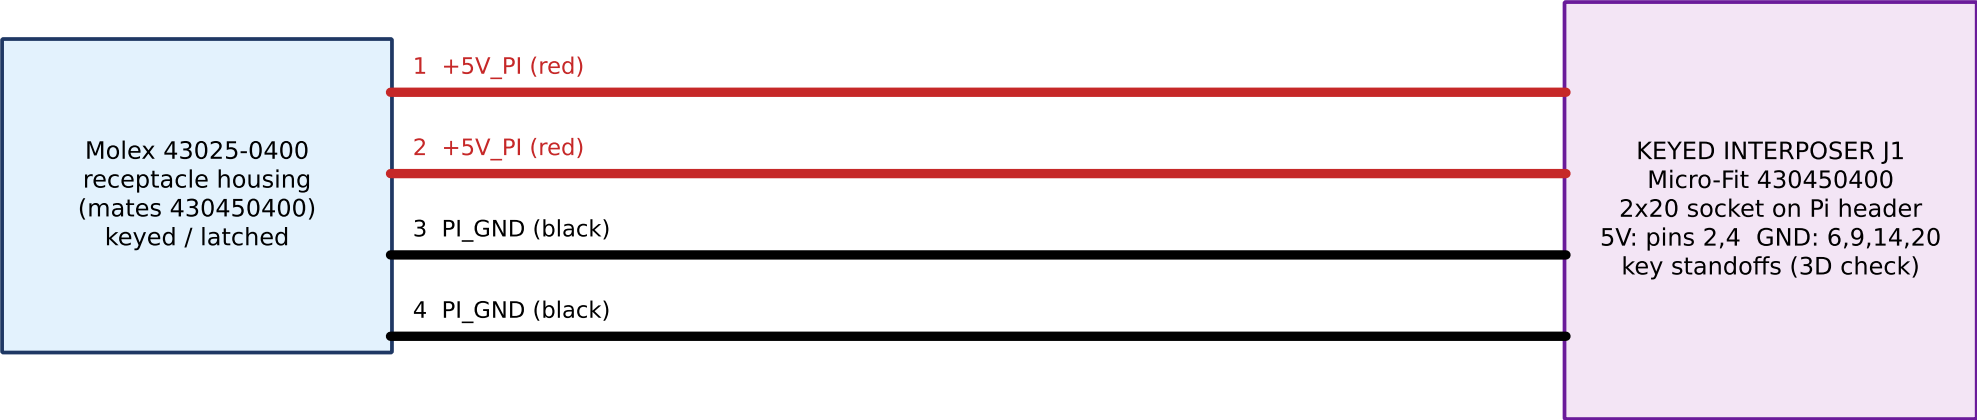

Wire: 18 AWG UL1061-type (insulation OD <= 1.85 mm), Molex 43030-0038 terminals, length <= 150 mm, twisted pairs per rail.  
16 AWG 1:1 to the interposer, 43025-0400 housings both ends (Molex 43030 terminals - confirm AWG range).  
Circuit 1+2 = +5 V pair (outer row), 3+4 = GND pair (inner row) - Molex dual-row numbering runs along rows.  
Key: housing is polarised - cannot be mated backwards. Mark pin 1 on harness label.  
PI USB-C must not be connected to any power source when this harness is fitted.