

**Part Number :** [22272031](#)


**Product Description :** KK 254 Header, Vertical, Square Pin, Friction Lock, 3 Circuits, 7.50mm Mating Pin Length, 3.56mm Tail Length, 2.54µm Matte Tin (Sn) Plating

**Series Number :** 6410

**Status :** Active

**Product Category :** PCB Headers and Receptacles

**Engineering Part Number :** AE-6410-03A(222)

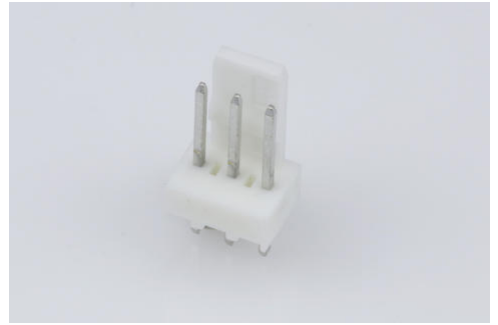

---

## Documents and Resources

### Drawings

[022272031\\_sd.pdf](#)

[PK-6410-002-001.pdf](#)

### 3D Models and Design Files

[STEP AP242](#)

[SOLIDWORKS](#)

[Creo](#)

[Symbol and Footprint \(Multi-Format\)](#)

[SYM-22-27-2031-001.zip](#)

### Specifications

[PS-99020-0088-001.pdf](#)

---

## Product Environment Compliance

### Compliance

|                    |                                                |
|--------------------|------------------------------------------------|
| GADSL/IMDS         | Compliant with Exemption 44; 33                |
| China RoHS         | per SJ/T 11365-2006                            |
| EU ELV             | Not Relevant                                   |
| Low-Halogen Status | Low-Halogen per IEC 61249-2-21                 |
| REACH SVHC         | Not Contained per D(2025)7771-DC (04 Feb 2026) |
| EU RoHS            | Compliant per EU 2015/863                      |

### [Compliance Statements](#)

- EU RoHS

- REACH SVHC
- Low-Halogen

#### Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

#### Substances of Interest

- PFAS

#### EU RoHS Certificate of Compliance

#### Additional Product Compliance Information

---

## Part Details

### General

|                |                                                                                                                                             |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Status         | Active                                                                                                                                      |
| Category       | PCB Headers and Receptacles                                                                                                                 |
| Series         | 6410                                                                                                                                        |
| Description    | KK 254 Header, Vertical, Square Pin, Friction Lock, 3 Circuits, 7.50mm Mating Pin Length, 3.56mm Tail Length, 2.54µm Matte Tin (Sn) Plating |
| Application    | Wire-to-Board                                                                                                                               |
| Component Type | PCB Header                                                                                                                                  |
| Product Name   | KK 254                                                                                                                                      |
| UPC            | 800753589636                                                                                                                                |

### Agency

|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

### Electrical

|                               |         |
|-------------------------------|---------|
| Current - Maximum per Contact | 4.0A    |
| Voltage - Maximum             | 500V AC |

### Physical

|                                |                    |
|--------------------------------|--------------------|
| Breakaway                      | No                 |
| Circuits (Loaded)              | 3                  |
| Circuits (maximum)             | 3                  |
| Color - Resin                  | Natural (White)    |
| Durability (mating cycles max) | 25                 |
| First Mate / Last Break        | No                 |
| Flammability                   | 94V-0              |
| Gender                         | Male               |
| Glow-Wire Capable              | No                 |
| Guide to Mating Part           | No                 |
| Keying to Mating Part          | No                 |
| Lock to Mating Part            | Yes                |
| Material - Metal               | Brass              |
| Material - Plating Mating      | Tin                |
| Material - Plating Termination | Tin                |
| Material - Resin               | Nylon              |
| Mounting Style                 | Through Hole       |
| Net Weight                     | 0.315/g            |
| Number of Rows                 | 1                  |
| Orientation                    | Vertical           |
| Packaging Type                 | Bag                |
| PCB Locator                    | No                 |
| PCB Retention                  | No                 |
| PCB Thickness - Recommended    | 1.60mm             |
| PC Tail Length                 | 3.56mm             |
| Pitch - Mating Interface       | 2.54mm             |
| Pitch - Termination Interface  | 2.54mm             |
| Plating min - Mating           | 2.540µm            |
| Plating min - Termination      | 2.540µm            |
| Polarized to Mating Part       | Yes                |
| Polarized to PCB               | No                 |
| Shrouded                       | Partially Shrouded |
| Stackable                      | Yes                |
| Temperature Range - Operating  | -40° to +80°C      |
| Termination Interface Style    | Through Hole       |

**Solder Process Data**

|                              |      |
|------------------------------|------|
| Max-Duration                 | 5    |
| Lead-Free Process Capability | WAVE |
| Max-Cycle                    | 1    |
| Max-Temp                     | 235  |

---

**Mates With / Use With**

**Mates with Part(s)**

|                                  |             |
|----------------------------------|-------------|
| Description                      | Part Number |
| KK 254 Single Row Crimp Housings | <u>2695</u> |