


OSBAMS Rev.2 Controller - test-point map (27 points) RC1.2 - REVIEW CANDIDATE - NOT RELEASED FOR FABRICATION

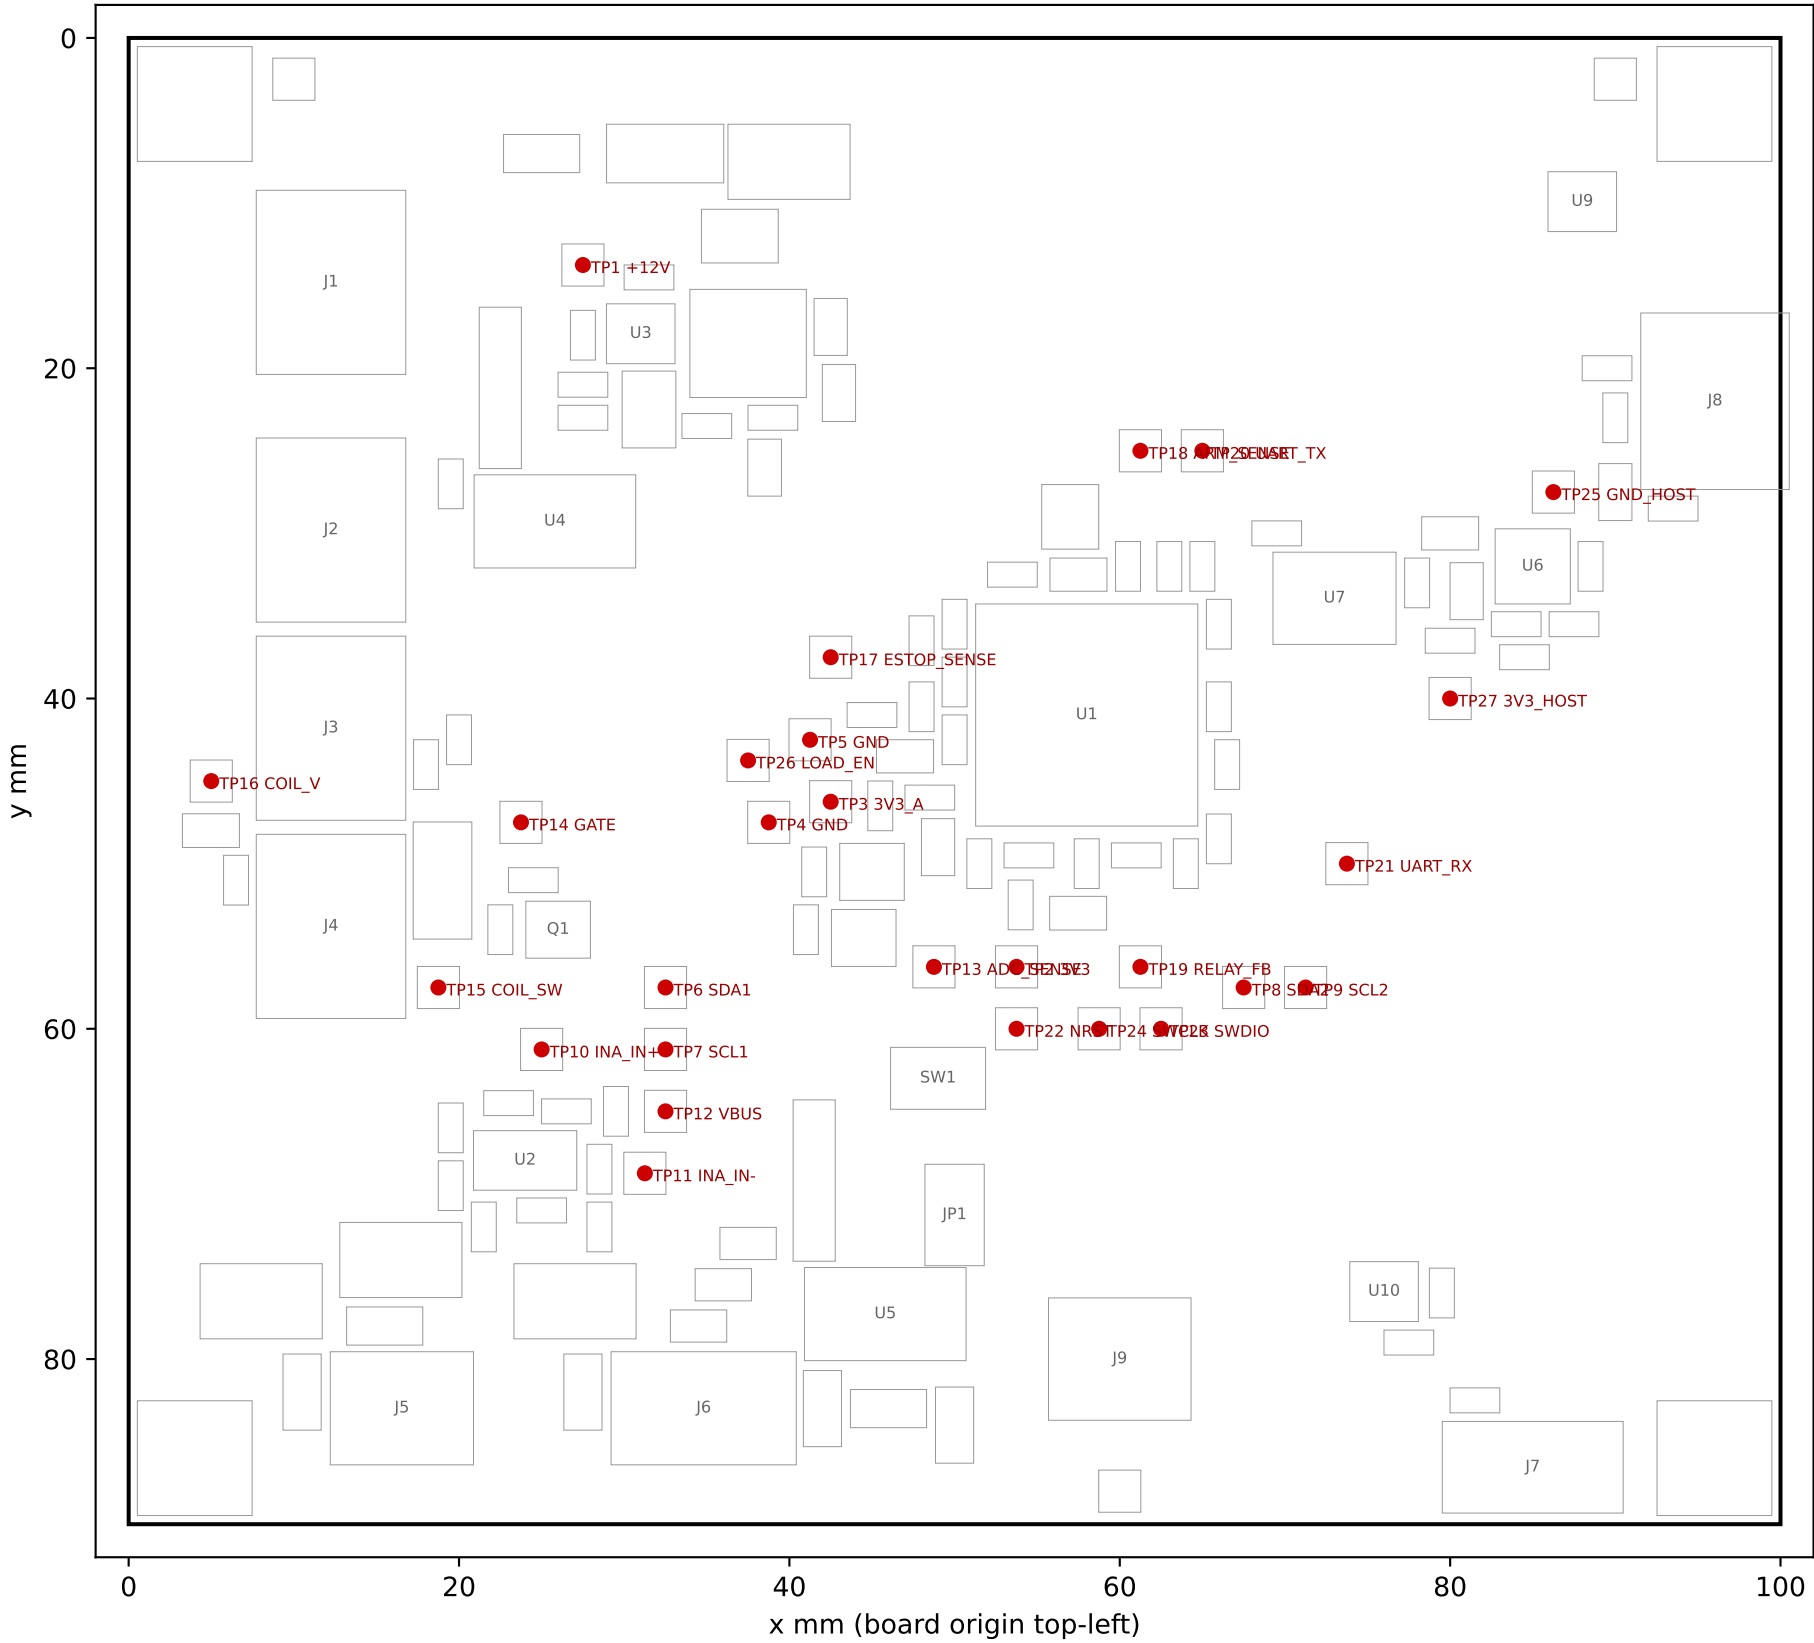

## Test-point list

| Ref  | Label       | Net         | x,y mm       |
|------|-------------|-------------|--------------|
| TP1  | +12V        | +12V        | (27.5, 13.8) |
| TP2  | 3V3         | +3V3        | (53.8, 56.2) |
| TP3  | 3V3_A       | 3V3_A       | (42.5, 46.2) |
| TP4  | GND         | GND         | (38.8, 47.5) |
| TP5  | GND         | GND         | (41.2, 42.5) |
| TP6  | SDA1        | SDA1        | (32.5, 57.5) |
| TP7  | SCL1        | SCL1        | (32.5, 61.2) |
| TP8  | SDA2        | SDA2        | (67.5, 57.5) |
| TP9  | SCL2        | SCL2        | (71.2, 57.5) |
| TP10 | INA_IN+     | INA_INP     | (25.0, 61.2) |
| TP11 | INA_IN-     | INA_INN     | (31.2, 68.8) |
| TP12 | VBUS        | INA_VBUS    | (32.5, 65.0) |
| TP13 | ADC_SENSE   | ADC_SENSE   | (48.8, 56.2) |
| TP14 | GATE        | GATE        | (23.8, 47.5) |
| TP15 | COIL_SW     | COIL_SW     | (18.8, 57.5) |
| TP16 | COIL_V      | COIL_V      | (5.0, 45.0)  |
| TP17 | ESTOP_SENSE | ESTOP_SENSE | (42.5, 37.5) |
| TP18 | ARM_SENSE   | ARM_SENSE   | (61.2, 25.0) |
| TP19 | RELAY_FB    | RELAY_FB    | (61.2, 56.2) |
| TP20 | UART_TX     | UART_TX_MCU | (65.0, 25.0) |
| TP21 | UART_RX     | UART_RX_MCU | (73.8, 50.0) |
| TP22 | NRST        | NRST        | (53.8, 60.0) |
| TP23 | SWDIO       | SWDIO       | (62.5, 60.0) |
| TP24 | SWCLK       | SWCLK       | (58.8, 60.0) |
| TP25 | GND_HOST    | GND_HOST    | (86.2, 27.5) |
| TP26 | LOAD_EN     | LOAD_EN     | (37.5, 43.8) |
| TP27 | 3V3_HOST    | 3V3_HOST    | (80.0, 40.0) |