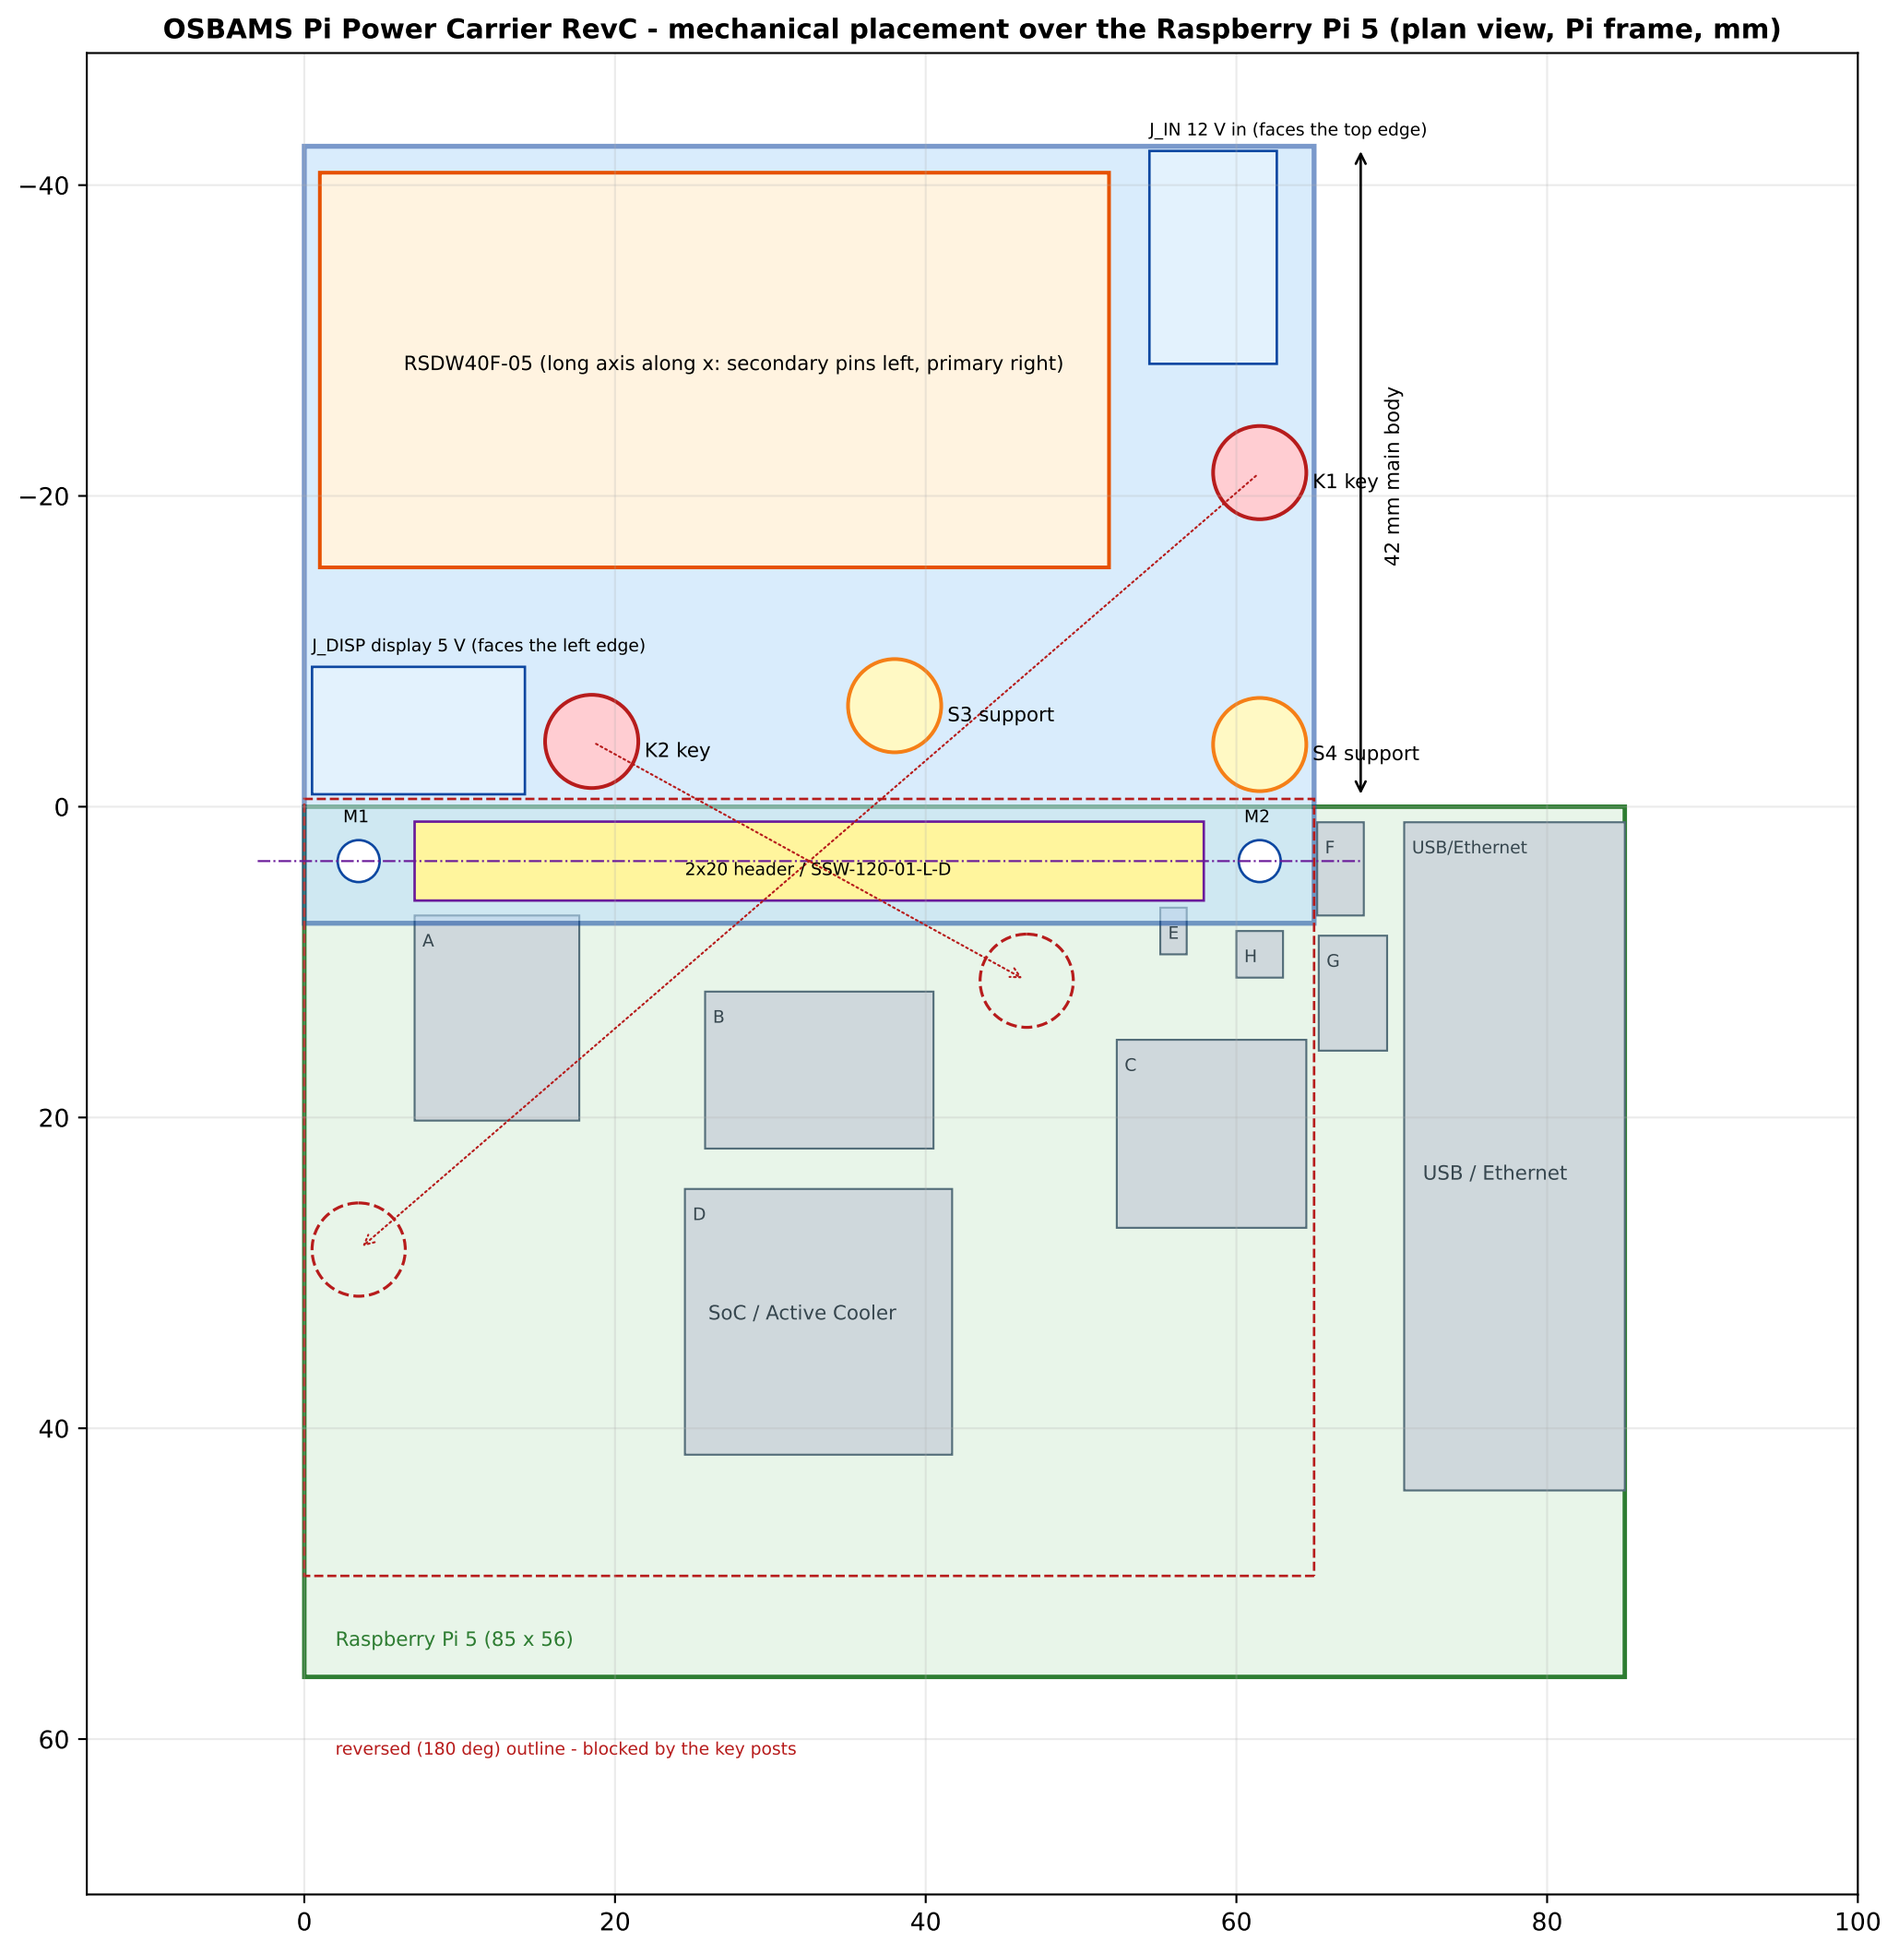
OSBAMS Pi Power Carrier RevC - mechanical placement over the Raspberry Pi 5 (plan view, Pi frame, mm)
J_IN 12 V in (faces the top edge)
RSDW40F-05 (long axis along x: secondary pins left, primary right)
42 mm main body
K1 key
J_DISP display 5 V (faces the left edge)
S3 support
K2 key
S4 support
M1
M2
2x20 header / SSW-120-01-L-D
F
USB/Ethernet
A
E
H
G
B
C
USB / Ethernet
D
SoC / Active Cooler
Raspberry Pi 5 (85 x 56)
reversed (180 deg) outline - blocked by the key posts
−40
−20
0
20
40
60
0
20
40
60
80
100