Workshop construction plan

Synthetic workshop 1500

Measured modular PVC

Overall assembled length: 1485.0 mm

Internal mouthpiece diameter: 30.0 mm

Internal bell diameter: 70.0 mm

Target note / frequency: C#2 / 69.3 Hz

Predicted passive resonances: 84.2 / 145.7 / 306.1 / 383.7 / 523.9 Hz

Measured parts and assembly order: 3

Assemble in listed order. Tube cuts already include socket insertions: do not subtract them twice. Only the connector body minus both insertions adds length. Dry-fit and verify measured sockets before bonding.

Dimensions rounded to 0.1 mm for marking; not a guaranteed manufacturing tolerance.

Measured parts and assembly order

Part / start (mm)	Length (mm)	Inside diameter	Outside diameter / Measured socket diameters	Left / right insertion
1. Tube a @0.0	800	30.0	40.0	—
Connector c @770.0	90	30.0 / 70.0	40.2 / 80.2	30 / 25
2. Tube b @835.0	650	70.0	80.0	—

Passive acoustic prediction, not a guaranteed played note. Check material, joints and wall integrity.

Dimensioned construction drawing

Synthetic workshop 1500 - Measured modular PVC

Longitudinal scale 1:6.0

Internal longitudinal profile

Dashed: measured socket openings, not exterior dimensions

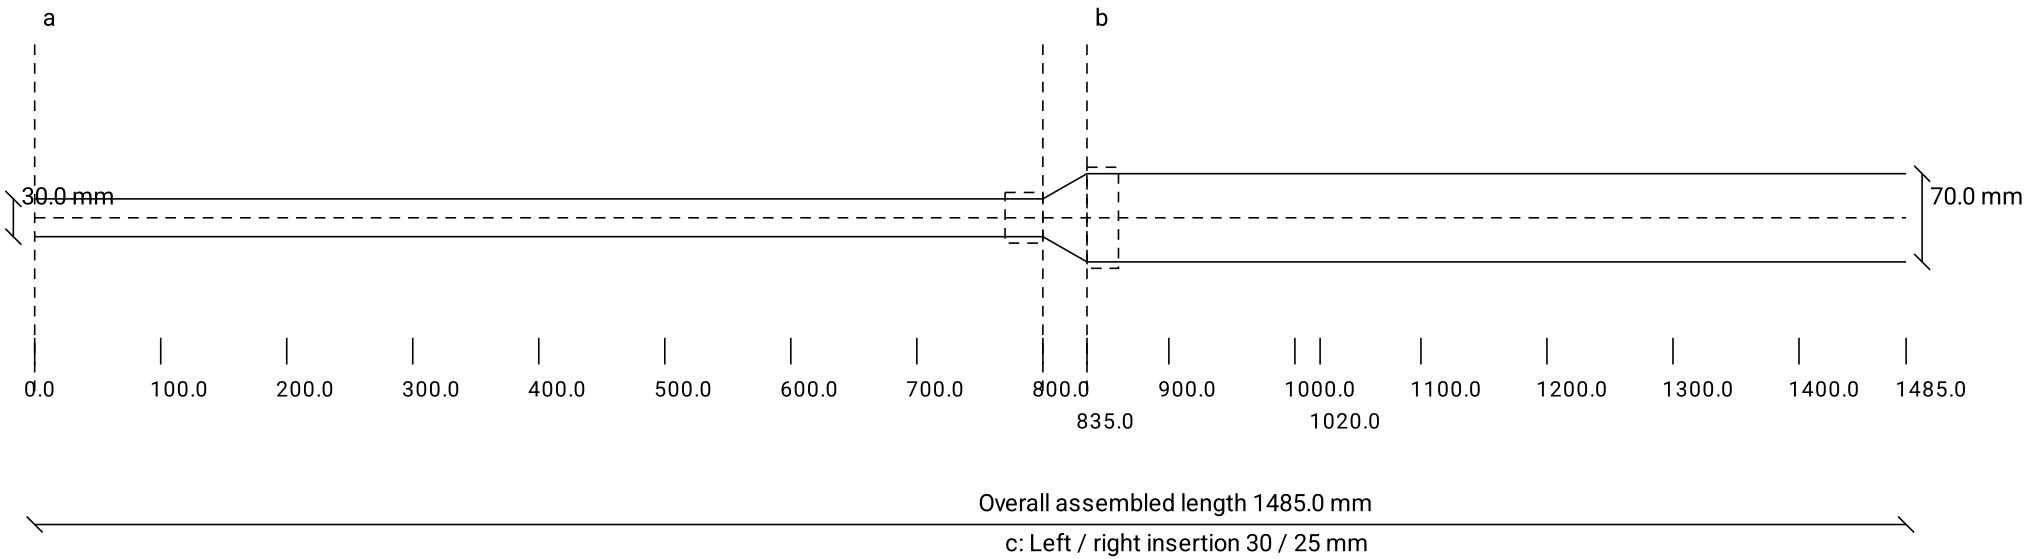

Assemble in listed order. Tube cuts already include socket insertions: do not subtract them twice. Only the connector body minus both insertions adds length. Dry-fit and verify measured sockets before bonding.

Dimensions rounded to 0.1 mm for marking; not a guaranteed manufacturing tolerance.



100 mm - print at 100% and verify with a ruler