CURRENT-STATE WORKFLOW - XANH SM LOW-BATTERY ASSISTANCE

Scoping hypothesis for validation with operations staff; baseline times are not yet measured.

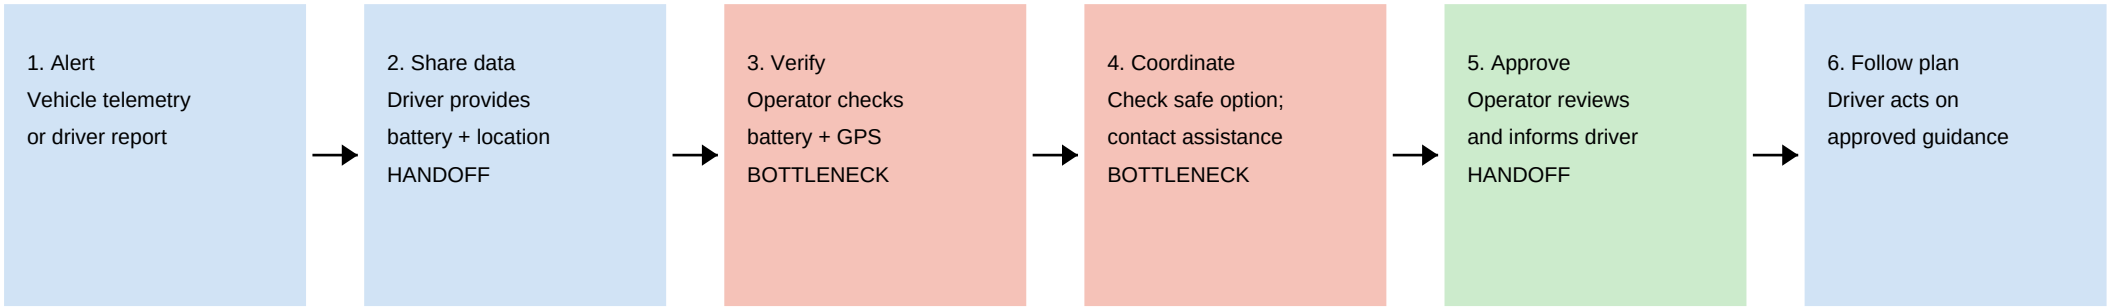

SAFETY BOUNDARY

If verified battery is below 5%, do not recommend a charging station more than 5 km away.

A mobile-charger dispatch is a proposal until an authorized operator confirms it.

MEASUREMENT NEEDED

Record alert-to-verified-plan time, operator handling time, assistance availability, and resolution.

Do not report an estimated baseline as observed company data.

Legend: red = potential bottleneck; arrows = sequence / handoff; green = human approval step.