

QUALITY MANUFACTURING TODAY

qmt

www.qmtmag.com

may/june 2009

A measurement breeze



GOM's mobile optical coordinate measuring technology checks mounting surfaces for a smooth setup of offshore wind turbines - page 18

A measurement breeze



Fig 1

Mobile optical coordinate measuring technology check mounting surfaces to ensures a smooth setup for offshore wind turbines

Because of their size, wind turbines are transported in individual parts to their offshore setup destination. Due to different production sites, the individual components are often put together for the first time at the mounting site on the high seas. Therefore, it is necessary to control the connections and mounting surfaces of tower and foundation independently before mounting.

To guarantee a smooth setup of the offshore wind turbines, the optical TRITOPCMM measuring system is used for checking the mounting surfaces and bolts. TRITOPCMM is a portable optical measuring system that precisely determines 3D coordinates of specified object points (Fig. 1). The gauging points are easily marked with self-adhesive or magnetic markers before the measuring process

The measuring object is then captured with the TRITOPCMM photogrammetric camera from different viewing angles. Based on all captured 2D images the computer automatically calculates the 3D coordinates of the gauge markers by means of bundle adjustment (Fig. 3, 4). Two certified scale bars guarantee the accuracy and process security of the measurement result.

The inspection of over 120 mounting bolts per platform can be accomplished by a single person.

Primitives such as cylinders, holes, spheres, border lines, etc. can be measured by using corresponding adapters (e.g. Fig. 5). For special requirements, custom adapters may be created.

The TRITOPCMM System is very mobile and flexible. The entire equipment consisting of camera case, laptop and scale bar case can easily be

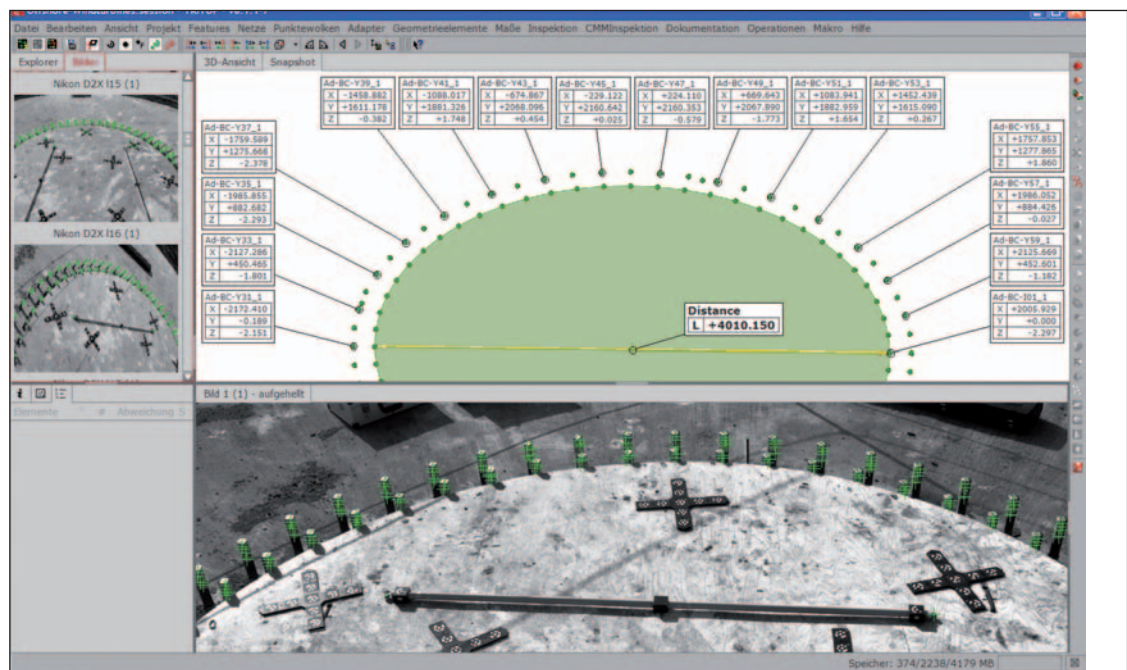


Fig. 4: 3D coordinates in the TRITOPCMM software measured from a 2D image set




Fig. 5: Primitive (cylinder) measured with a GOM adapter

carried by one person. The measuring process also only requires one operator. Since data acquisition is carried out with a camera and data evaluation takes place on a laptop, measurement projects can be recorded and inspected without the need of an external power supply.

Inspection of mounting bolt

For the setup of offshore wind turbines special concrete foundations are built on land. They are more than 20 metres high and have a diameter of approx. 10 metres on the upper platform. After completion, the foundations are tugged to their destination ashore and anchored to the sea bed so that the upper edge of the platform rises 2-4 metres from the water surface. Because of the height of the wind turbine, the tower consists of several segments. These parts are also transported by boat to their offshore destination. The tower is then constructed on site using a special floating crane for heavy loads. For mounting the lowest tower segment, 120 steel bolts are recessed in the concrete foundation. These mounting bolts are positioned in two circles with a diameter of approx. 4 metres.

Since foundations and tower parts are produced at different places, a test setup ashore is not always possible. If the position of the mounting bolts in the foundation does not fit to the hole pattern in the lowest tower segment, time-consuming adjustments have to be made on site. In this case the tower mounting on high seas is extremely difficult if not impossible. As the floating crane is very expensive, such a situation causes extremely high additional costs and a large time lag.

To avoid such problems, the position of the mounting bolts in the concrete foundation has to be verified to the required accuracy of 1/10 millimetre. The TRITOPCMM measuring system enables the verification of the bolts directly after the completion of the foundations ashore as well

as after the anchoring on high seas.

Harsh conditions such as the limited space and measuring distance on the concrete foundations, strong wind or the lack of power supply are no obstacles at all for reliable measuring with the mobile and compact TRITOPCMM system.

False positioned, or tilted mounting bolts in the foundation, can be identified fast and clearly with the required accuracy. Thus, it is possible to eliminate problems before starting the mounting process.

Measuring procedure

For the measuring process, gauging markers and scale bars are placed on the foundation. Customized adapters, which were made from angle profiles, are used for inspection of the 120 bolts

Depending on the definition of the adapters, single points or the axis of a mounting bolt can be calculated to determine the position or the direc-

Fig. 3: Scheme of bundle adjustment of three camera positions

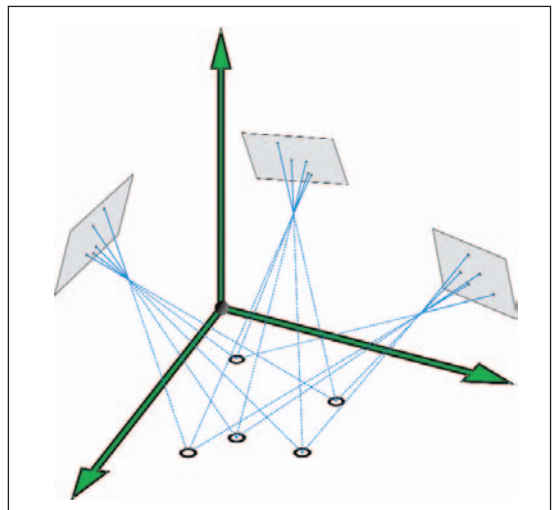


Fig 2

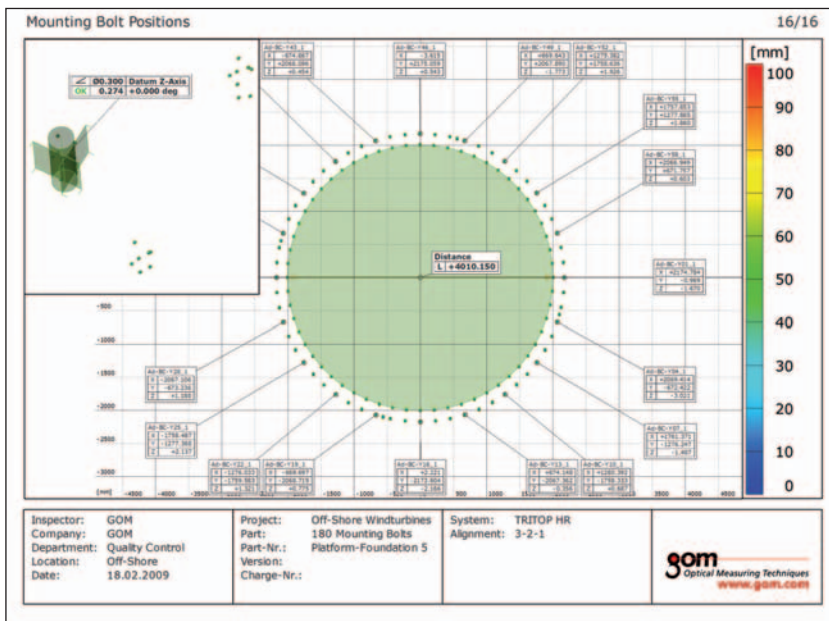


Fig. 6: Measuring report from TRITOPCMM software with position of mounting bolts and detail of Geometric Dimensioning and Tolerancing (GD&T)

tion of each single mounting bolt. The TRITOPCMM software allows the creation of measuring reports as well as the export of measuring data into tables (Fig. 6).

The measuring area is then captured by several pictures taken from different directions and viewing angles (Fig. 1). During the measuring process the images are automatically transferred to the laptop. Immediately after the image transfer, the 3D coordinates of all 120 mounting bolts are cal-

culated within a few minutes on the basis of the unique dot pattern on the adapters. As the project is already evaluated on site, it can be immediately checked for success or missing data.


The preparations for the measurement take less than 30 minutes, the measurement itself approx. 10 minutes. Thus, inclusive the transport by boat to the next platform, about one hour is required for each foundation.

The easily portable optical TRITOPCMM measuring system allows precise measurement and verification of mounting bolts and surfaces using CMM inspection. By this method, possible problems caused by false positioned or tilted mounting bolts can be identified and eliminated before assembly.

Due to the simple measuring process, the inspection of over 120 mounting bolts per platform can be accomplished by a single person. The data evaluation directly on-site, guarantees that all features were captured completely and correct.

Using optical measuring technology for inspecting mounting surfaces ensures a smooth setup of offshore wind turbines preventing high additional costs and saving time. ●


info@gom.com
www.gom.com



CHE
Coordinate Metrology

Laser Calibrations for larger coordinate measuring machines and machine tools

CMM Reverifications to ISO.10360-2 plus Service / Repairs / Upgrades




Planned maintenance to minimise downtime

Hardware/software retrofit for most CMM machines

Approved retrofitter for Renishaw, Zeiss and Aberlink

Call us on:
Tel: 01527 558255
Fax: 01527 558244

Email: sales@che-metrology.co.uk



Put More Muscle In Your Arm...

Only Verisurf Software intelligently manages all of your inspection devices with today's most advanced, comprehensive suite of dynamic tools designed to save costly inspection and measurement time.

Our common platform is revolutionizing manufacturing by providing powerful new capabilities from inspection to analysis, and reverse engineering. You will not believe how easy it is to learn and to use.







Call today for a personal demonstration.



Call Toll Free (UK only):
+44 (0) 800 612 6950
or +44 (0) 1684 891372
email: james.barnes@verisurf.com

USA: +1 714 970 1683