DYNA LIFT
GEARLESS MOTOR

موتور های گیرلس

داینالیفت

موتور های دیسکی- سیستم ۲:۱

دیسکی ۶ نفر-فلکه ۳۲ ——— 1
دیسکی ۸ نفر - فلکه ۳۲ ——— 2
دیسکی ۸ نفر - فلکه ۴۰ ——— 3-4
دیسکی ۱۰ نفر -فلکه۴۰ ——— 5-6
دیسکی۱۳ نفر -فلکه ۴۰ ——— 7-8
دیسکی ۱۶ نفر -فلکه ۴۰ ——— 9-10
دیسکی ۲۱نفر -فلکه ۴۰ ——— 11-12

موتور های بشکه ای-سیستم ۲:۱

بشکه ای ۶ نفر-فلکه ۳۲ ——— 13
بشکه ای ۸ نفر -فلکه ۳۲ ——— 14-15
بشکه ای ۱۰ نفر -فلکه ۳۲ ——— 16-17
بشکه ای ۱۳ نفر -فلکه ۳۲ ——— 18-19
بشکه ای ۱۶ نفر -فلکه ۳۲ ——— 20-21
بشکه ای ۲۱ نفر -فلکه ۳۲ ——— 22-23

موتور های دیسکی -سیستم ۱:۱

دیسکی ۶ نفر ۱:۱ ——— 24
دیسکی ۸ نفر ۱:۱ ——— 25

گواهینامه های ترمز Certificate

شماره گواهینامه: SCMB.0152 Rev.2 ——— 26
شماره گواهینامه: SCMB.0151 Rev.2 ——— 27
شماره گواهینامه: SCMB.468 ——— 28
شماره گواهینامه: SCMB.469 ——— 29


WTD1-B-450


DYNA LIFT
GEARLESS MOTOR

دیسکی ۶ نفره (سرعت : ۱)
فلکه ۳۲
سیستم ۲:۱

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
دیسکی	۲:۱	۴*۸mm	۱۲	۳۲	۱	۶	۴۵۰	۸	۳



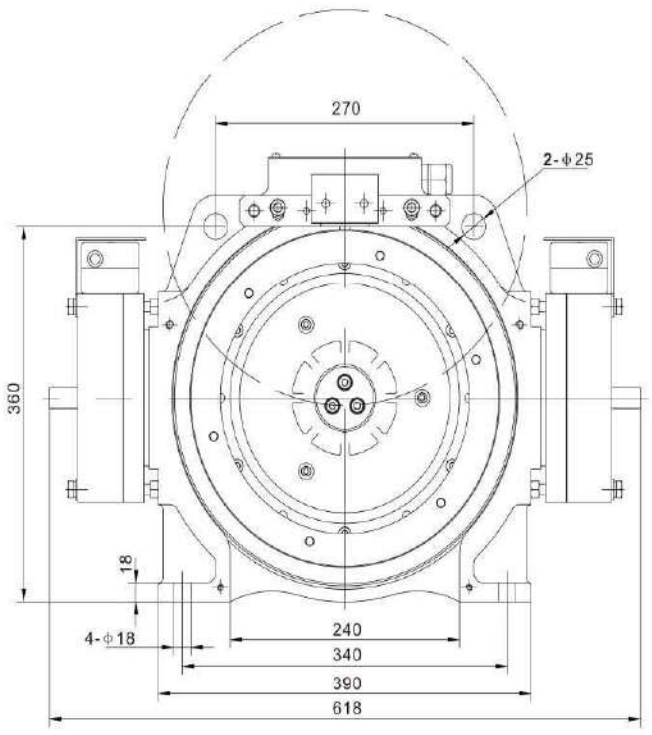

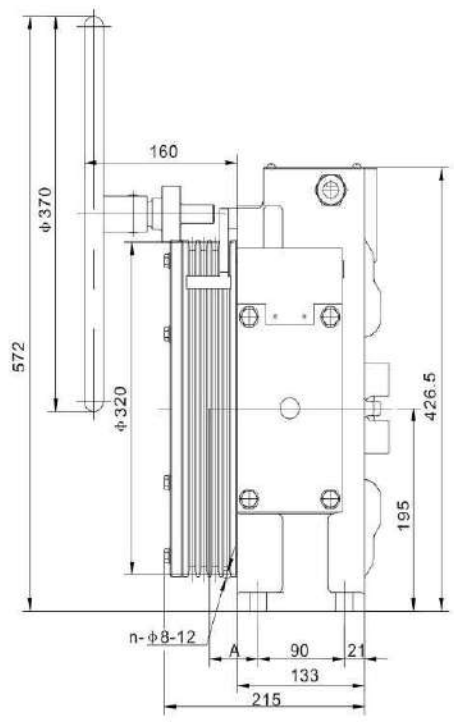

when n=4 ,A=51, when n=5,A=57

TECHNICAL DATASHEET

Motor type	WTD1-B-450	
Capacity	450	[Kg]
Car Speed	1	[m/s]
Rated Voltage	380	[V]
Rated Output	3	[kW]
Rated Current	8	[A]
Rated Speed	119	[rpm]
Frequency	19.9	[Hz]
Poles	20	[2p]
Torque	240	[N.m]
Max Static Load	2000	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-2	
Supply voltage	110	[Vdc]
Current	3.3	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		320	Ropes Dia :		4 Φ8
Pitch	[mm] :	12	Groove :		Undercut V
Groove Angle	[Y]:	40	Cut angle	[β] :	105


WTD1-B-630


DYNA LIFT
GEARLESS MOTOR

دیسکی ۸ نفره (سرعت : ۱)
فلکه ۳۲
سیستم ۲:۱

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
دیسکی	۲:۱	۶*۸ mm	۱۲	۳۲	۱	۸	۶۳۰	۱۰	۴/۲



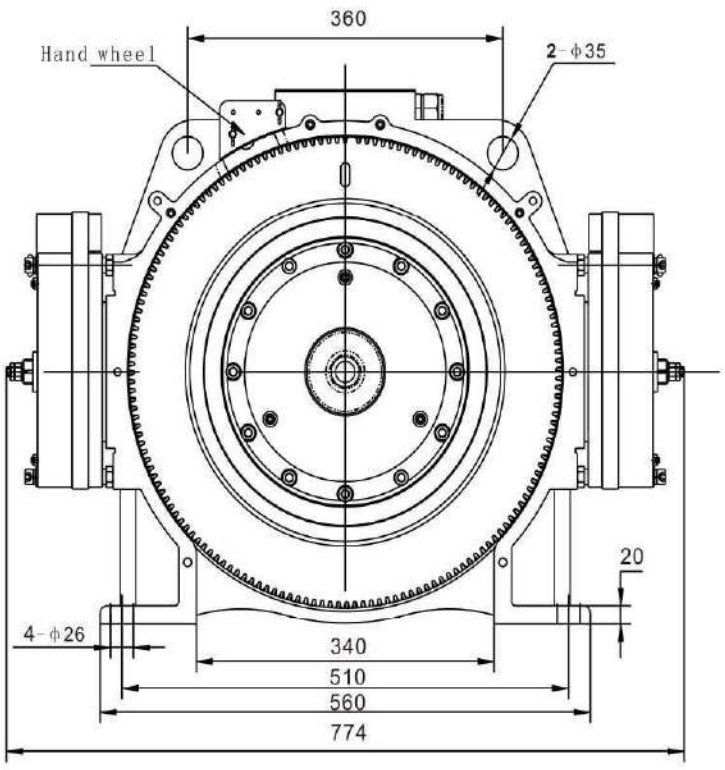

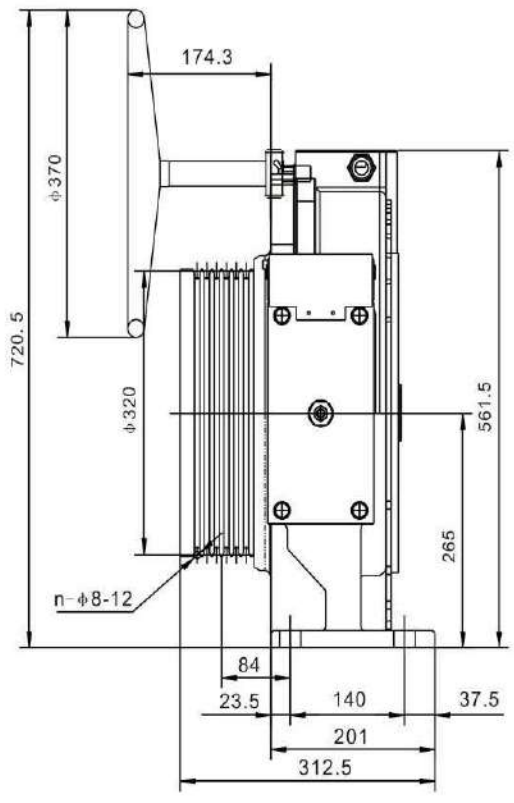

TECHNICAL DATASHEET

Motor type	WTD1-B-630	
Capacity	630	[Kg]
Car Speed	1	[m/s]
Rated Voltage	380	[V]
Rated Output	4.2	[kW]
Rated Current	10	[A]
Rated Speed	119	[rpm]
Frequency	29.8	[Hz]
Poles	30	[2p]
Torque	336	[N.m]
Max Static Load	3500	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-2	
Supply voltage	220	[Vdc]
Current	1.6	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		320	Ropes Dia :		6 Φ 8
Pitch	[mm] :	12	Groove :		Undercut V
Groove Angle	[Y]:	40	Cut angle	[β] :	105


WTD1-B-630


DYNA LIFT
GEARLESS MOTOR

دیسکی ۸نفره (سرعت : ۱)
فلکه ۴۰
سیستم ۲:۱

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
دیسکی	۲:۱	۴*۱۰ mm	۱۶	۴۰	۱	۸	۶۳۰	۱۰	۴/۲



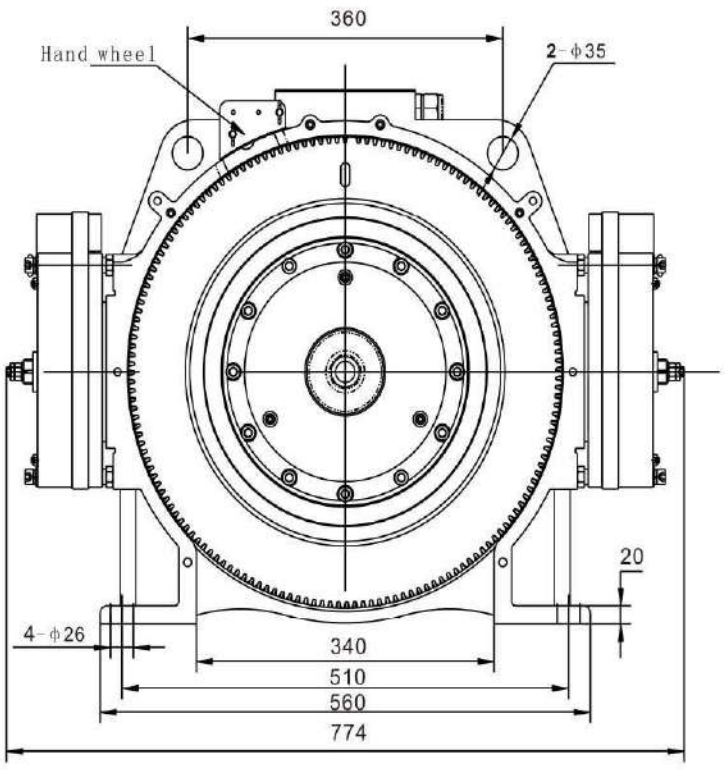

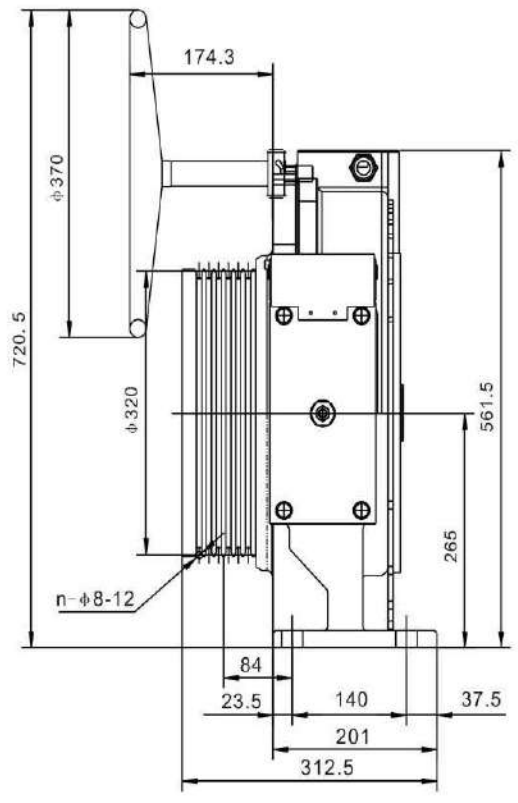

TECHNICAL DATASHEET

Motor type	WTD1-B-630	
Capacity	630	[Kg]
Car Speed	1	[m/s]
Rated Voltage	380	[V]
Rated Output	4.2	[kW]
Rated Current	10	[A]
Rated Speed	119	[rpm]
Frequency	29.8	[Hz]
Poles	30	[2p]
Torque	336	[N.m]
Max Static Load	3500	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-2	
Supply voltage	220	[Vdc]
Current	1.6	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		400	Ropes Dia :	4	Φ10
Pitch	[mm] :	16	Groove :		Undercut V
Groove Angle	[Y]:	40	Cut angle	[β] :	105


WTD1-B-630


DYNA LIFT
GEARLESS MOTOR

دیسکی ۸ نفره (سرعت : ۱/۶)
فلکه ۴۰
سیستم ۲:۱

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
دیسکی	۲:۱	۴*۱۰ mm	۱۶	۴۰	۱/۶	۸	۶۳۰	۱۷	۶/۷



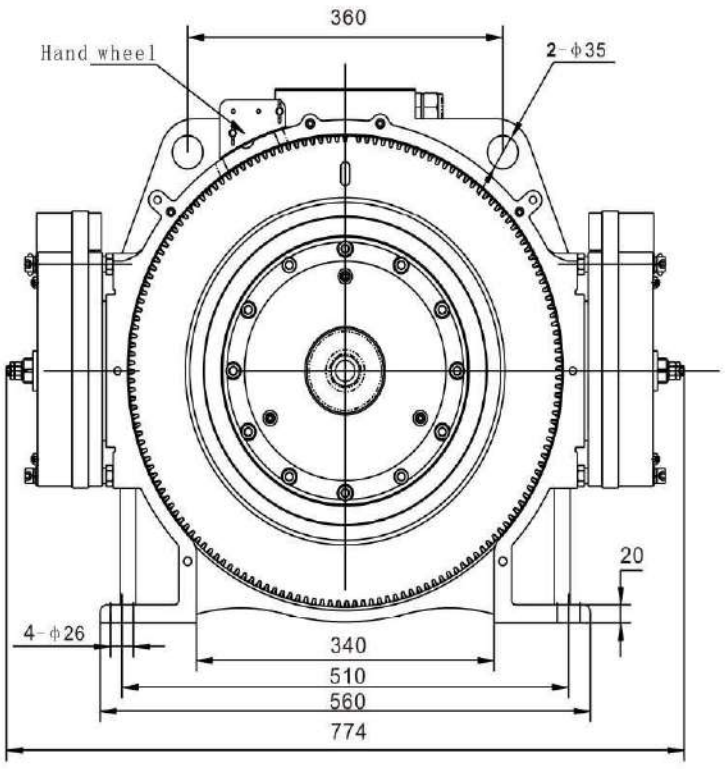

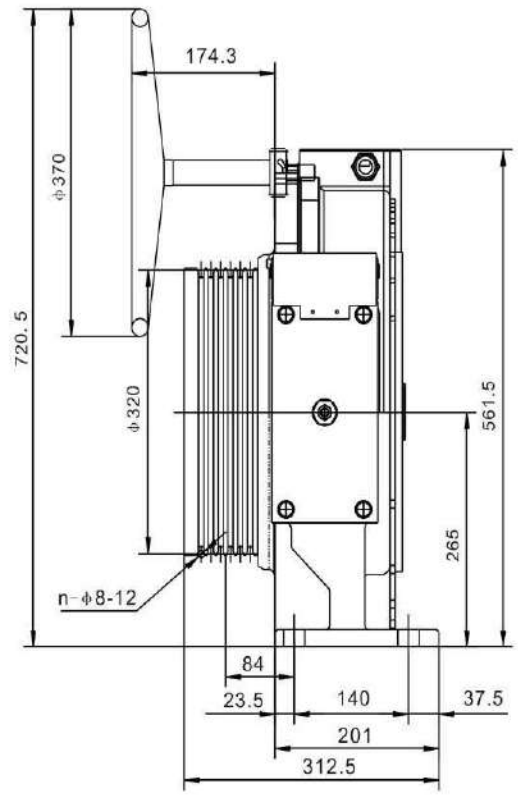

TECHNICAL DATASHEET

Motor type	WTD1-B-630	
Capacity	360	[Kg]
Car Speed	1.6	[m/s]
Rated Voltage	380	[V]
Rated Output	6.7	[kW]
Rated Current	17	[A]
Rated Speed	153	[rpm]
Frequency	38.3	[Hz]
Poles	30	[2p]
Torque	420	[N.m]
Max Static Load	3500	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-2	
Supply voltage	220	[Vdc]
Current	1.6	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		400	Ropes Dia :	4	Φ10
Pitch	[mm] :	16	Groove :		Undercut V
Groove Angle	[Y]:	40	Cut angle	[β] :	105


WTD1-B-800


دیسکی ۱۰ نفره (سرعت : ۱)
فلکه ۴۰
سیستم ۲:۱

DYNA LIFT
GEARLESS MOTOR

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
دیسکی	۲:۱	۵*۱۰ mm	۱۶	۴۰	۱	۱۰	۸۰۰	۱۲	۵/۳



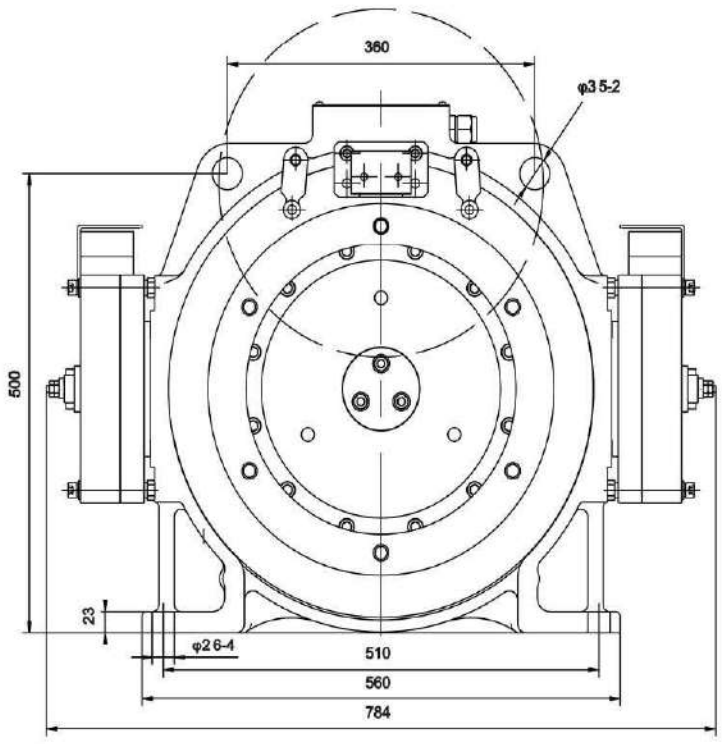

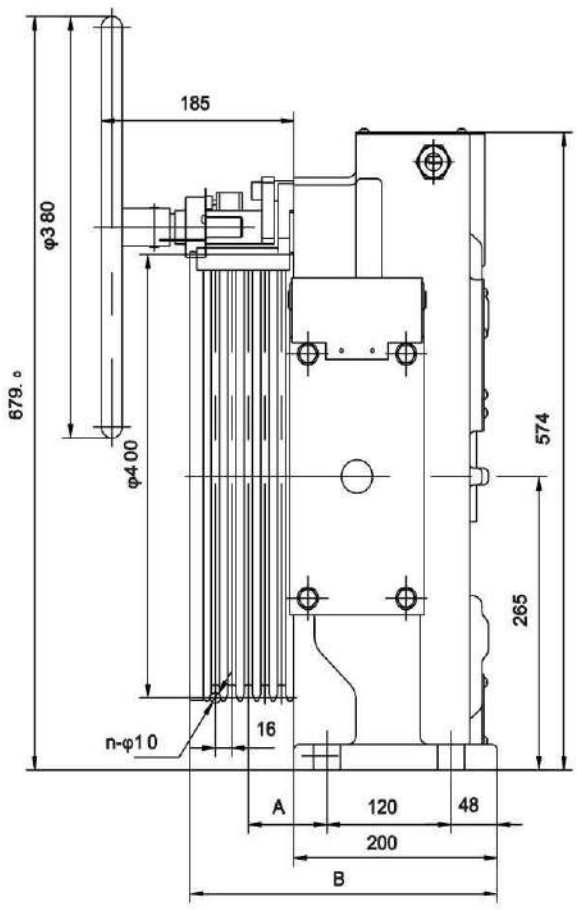

TECHNICAL DATASHEET

Motor type	WTD1-B-800	
Capacity	800	[Kg]
Car Speed	1	[m/s]
Rated Voltage	380	[V]
Rated Output	5.3	[kW]
Rated Current	12	[A]
Rated Speed	95	[rpm]
Frequency	23.8	[Hz]
Poles	30	[2p]
Torque	532	[N.m]
Max Static Load	3500	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-2	
Supply voltage	220	[Vdc]
Current	1.6	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		400	Ropes Dia :	5	Φ10
Pitch	[mm] :	16	Groove :		Undercut V
Groove Angle	[Y]:	40	Cut angle	[β] :	105


WTD1-B-800


DYNA LIFT
GEARLESS MOTOR

دیسکی ۱۰ نفره (سرعت : ۱/۶)
فلکه ۴۰
سیستم ۲:۱

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
دیسکی	۲:۱	۵*۱۰ mm	۱۶	۴۰	۱/۶	۱۰	۸۰۰	۲۱	۸/۵



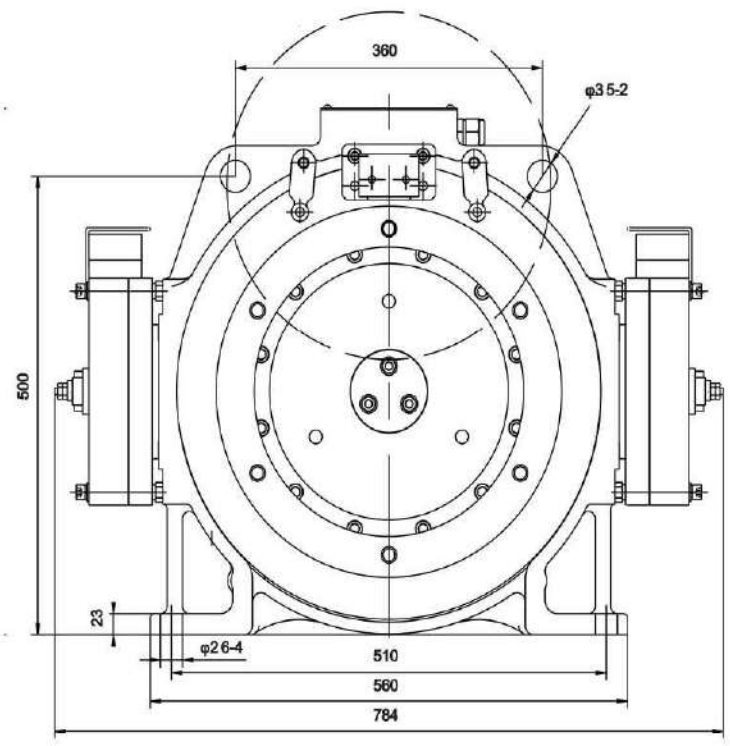

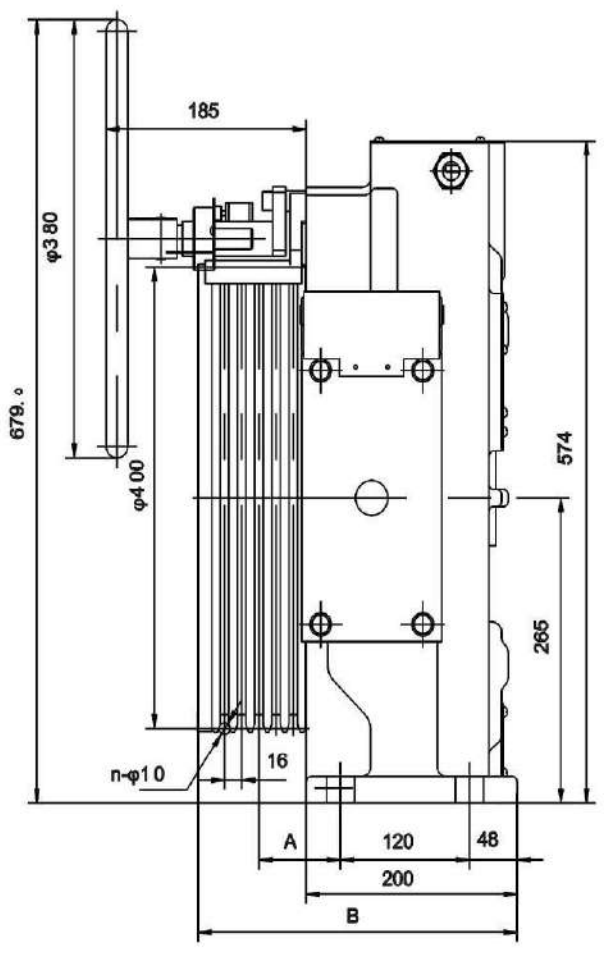

TECHNICAL DATASHEET

Motor type	WTD1-B-800	
Capacity	800	[Kg]
Car Speed	1.6	[m/s]
Rated Voltage	380	[V]
Rated Output	8.5	[kW]
Rated Current	21	[A]
Rated Speed	153	[rpm]
Frequency	38.3	[Hz]
Poles	30	[2p]
Torque	532	[N.m]
Max Static Load	3500	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-2	
Supply voltage	220	[Vdc]
Current	1.6	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		400	Ropes Dia :	5	Φ10
Pitch	[mm] :	16	Groove :		Undercut V
Groove Angle	[Y]:	40	Cut angle	[β] :	105


WTD1-B-1000


DYNA LIFT
GEARLESS MOTOR

دیسکی ۱۳ نفره (سرعت : ۱)
فلکه ۴۰
سیستم ۲:۱

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
دیسکی	۲:۱	۶*۱۰ mm	۱۶	۴۰	۱	۱۳	۱۰۰۰	۱۵	۶/۶



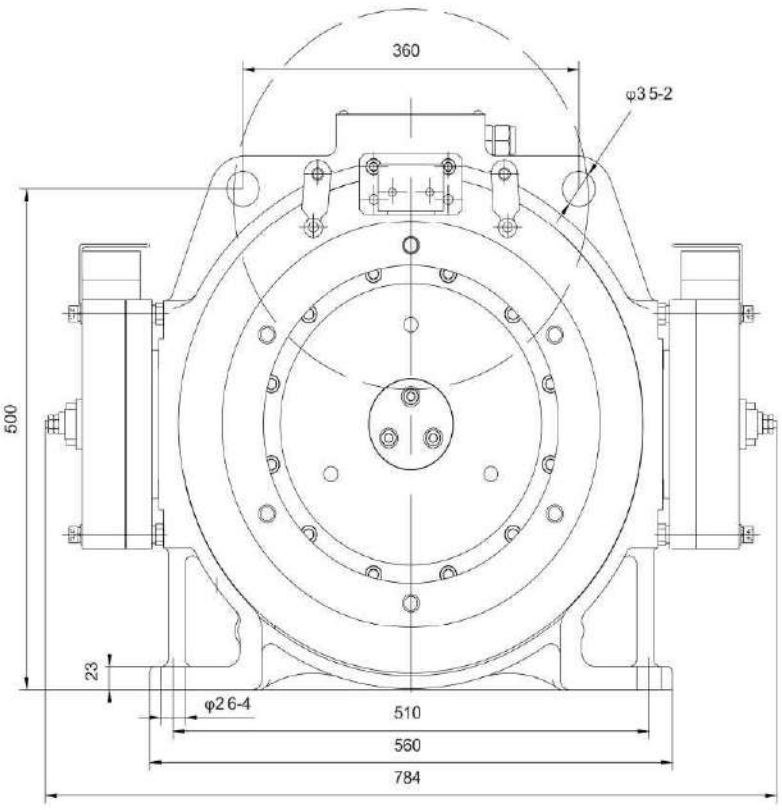

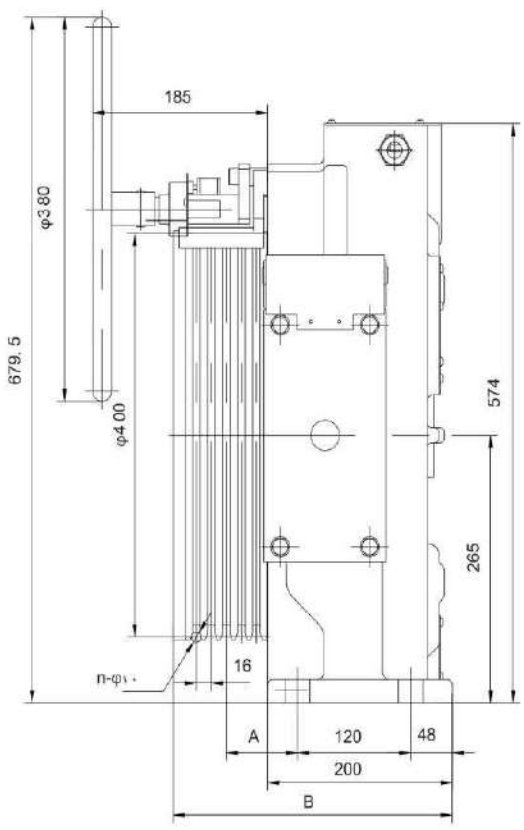

TECHNICAL DATASHEET

Motor type	WTD1-B-1000	
Capacity	1000	[Kg]
Car Speed	1	[m/s]
Rated Voltage	380	[V]
Rated Output	6.6	[kW]
Rated Current	15	[A]
Rated Speed	95	[rpm]
Frequency	23.8	[Hz]
Poles	30	[2p]
Torque	665	[N.m]
Max Static Load	3500	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-2	
Supply voltage	220	[Vdc]
Current	1.6	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		400	Ropes Dia :	6	Φ10
Pitch	[mm] :	16	Groove :		Undercut V
Groove Angle	[Y]:	40	Cut angle	[β] :	105


WTD1-B-1000


DYNA LIFT
GEARLESS MOTOR

دیسکی ۱۳ نفره (سرعت : ۱/۶)
فلکه ۴۰
سیستم ۲:۱

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
دیسکی	۲:۱	۶*۱۰ mm	۱۶	۴۰	۱/۶	۱۳	۱۰۰۰	۲۵	۱۰/۶



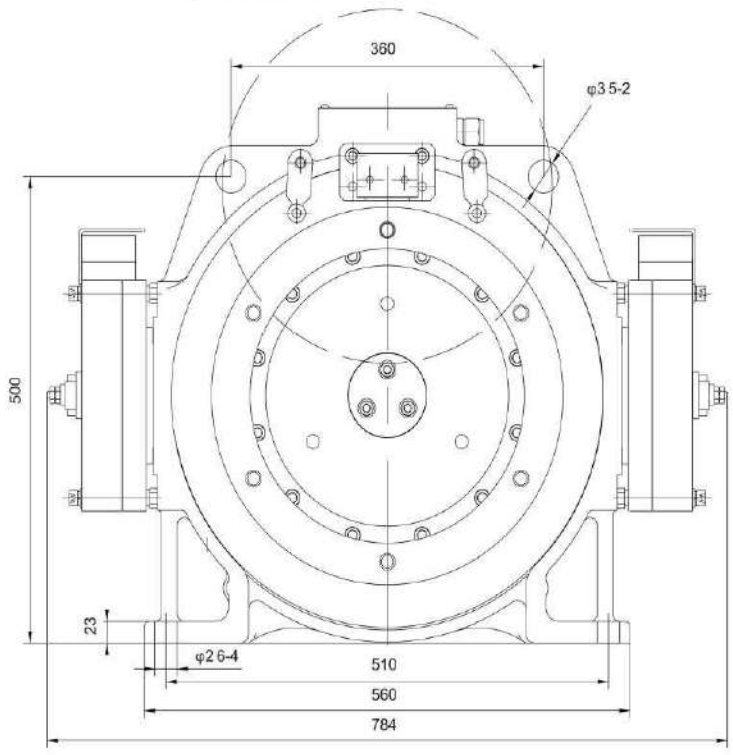

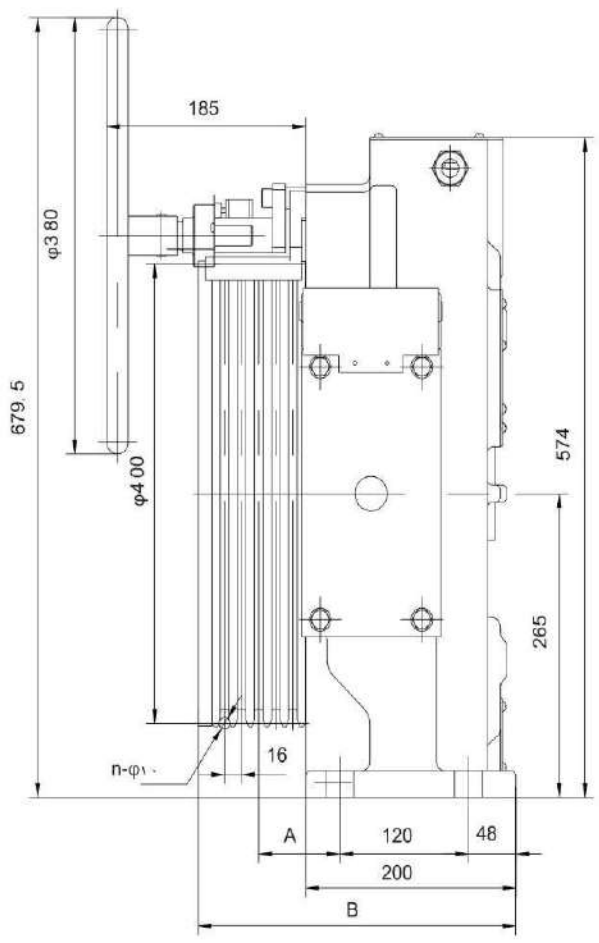

TECHNICAL DATASHEET

Motor type	WTD1-B-1000	
Capacity	1000	[Kg]
Car Speed	1.6	[m/s]
Rated Voltage	380	[V]
Rated Output	10.6	[kW]
Rated Current	25	[A]
Rated Speed	153	[rpm]
Frequency	38.3	[Hz]
Poles	30	[2p]
Torque	665	[N.m]
Max Static Load	3500	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-2	
Supply voltage	220	[Vdc]
Current	1.6	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		400	Ropes Dia :	6	Φ10
Pitch	[mm] :	16	Groove :		Undercut V
Groove Angle	[Y]:	40	Cut angle	[β] :	105


WTD1-B-1250


دیسکی ۱۶ نفره (سرعت : ۱)
فلکه ۴۰
سیستم ۲:۱

DYNA LIFT
GEARLESS MOTOR

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
دیسکی	۲:۱	۶*۱۰ mm	۱۶	۴۰	۱	۱۶	۱۲۵۰	۲۰	۸/۷



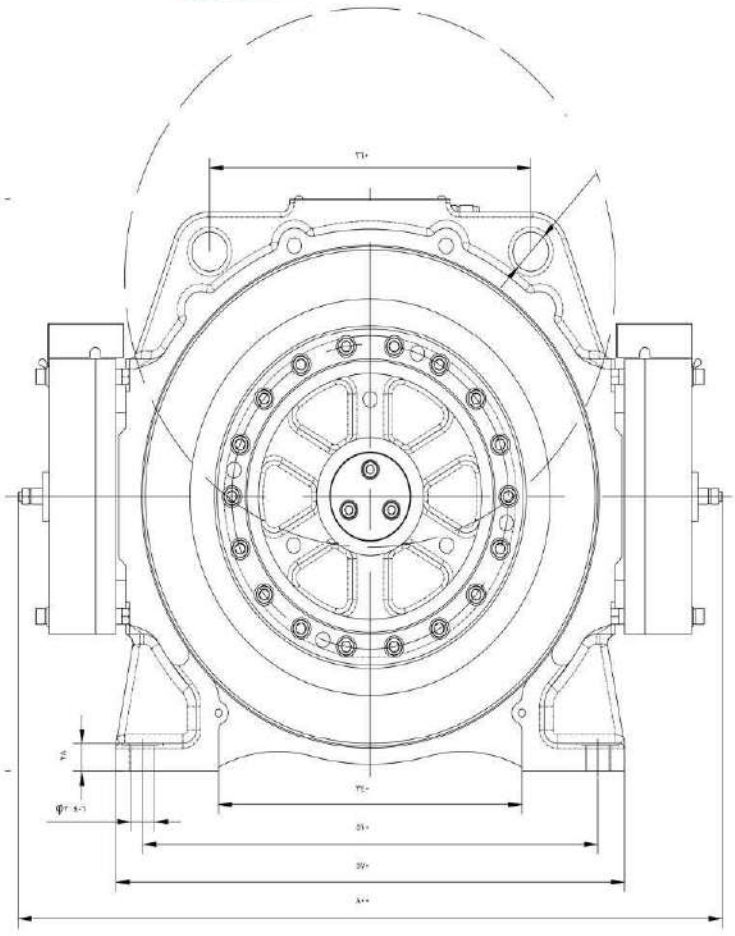

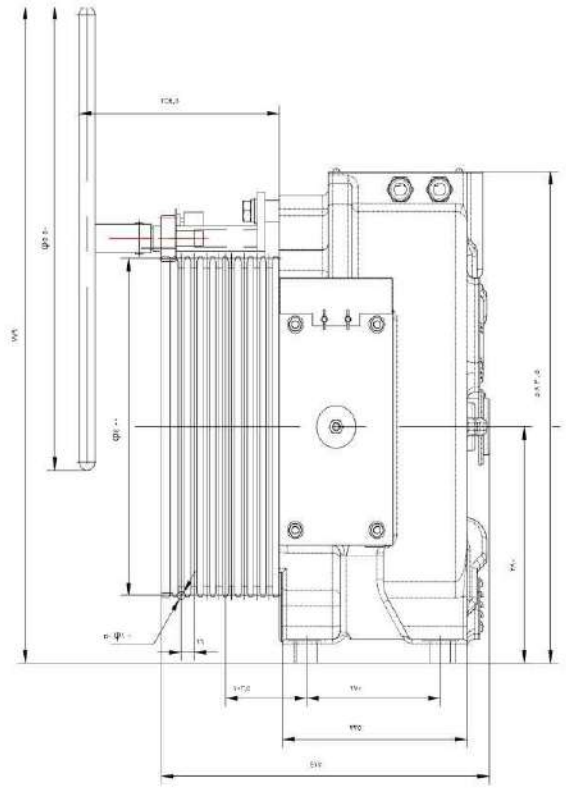

TECHNICAL DATASHEET

Motor type	WTD1-B-1250	
Capacity	1250	[Kg]
Car Speed	1	[m/s]
Rated Voltage	380	[V]
Rated Output	8.7	[kW]
Rated Current	20	[A]
Rated Speed	95	[rpm]
Frequency	23.8	[Hz]
Poles	30	[2p]
Torque	866	[N.m]
Max Static Load	5500	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-2	
Supply voltage	220	[Vdc]
Current	2	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		400	Ropes Dia :	6	Φ10
Pitch	[mm] :	16	Groove :		Undercut V
Groove Angle	[Y]:	40	Cut angle	[β] :	105


WTD1-B-1250


DYNA LIFT
GEARLESS MOTOR

دیسکی ۱۶ نفره (سرعت :۱/۶)
فلکه ۴۰
سیستم ۲:۱

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
دیسکی	۲:۱	۶*۱۰ mm	۱۶	۴۰	۱/۶	۱۶	۱۲۵۰	۳۵	۱۳/۸



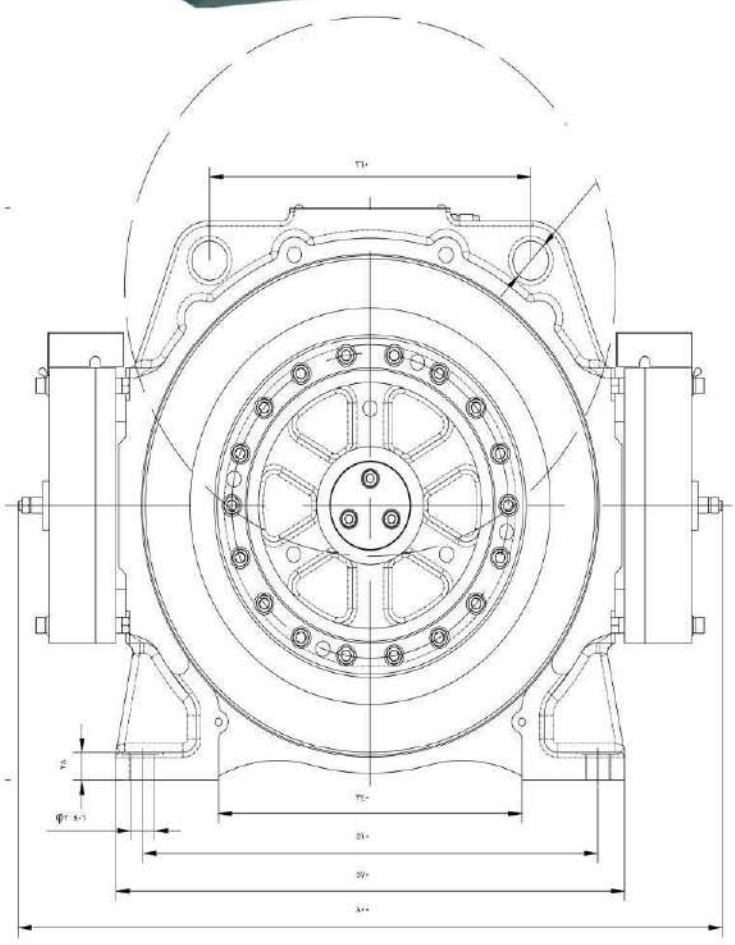

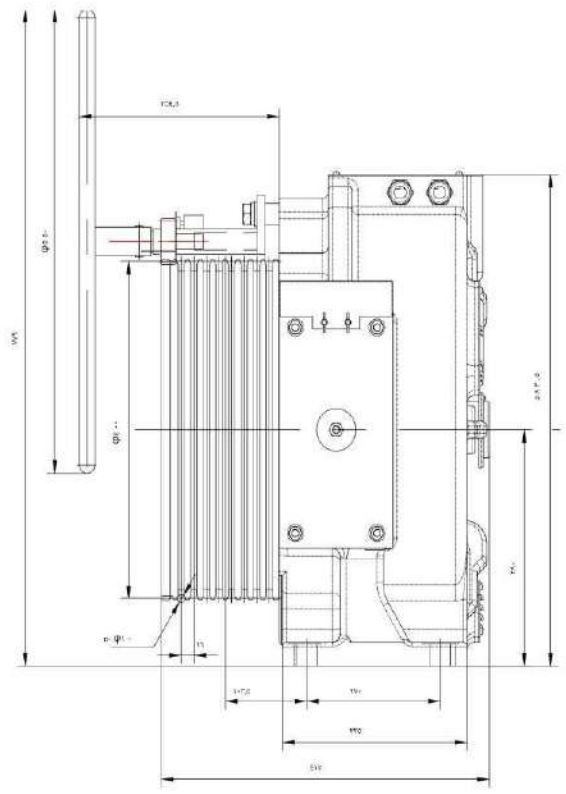

TECHNICAL DATASHEET

Motor type	WTD1-B-1250	
Capacity	1250	[Kg]
Car Speed	1.6	[m/s]
Rated Voltage	380	[V]
Rated Output	13.8	[kW]
Rated Current	35	[A]
Rated Speed	153	[rpm]
Frequency	38.3	[Hz]
Poles	30	[2p]
Torque	866	[N.m]
Max Static Load	5500	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-2	
Supply voltage	220	[Vdc]
Current	2	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		400	Ropes Dia :	6	Φ10
Pitch	[mm] :	16	Groove :		Undercut V
Groove Angle	[Y]:	40	Cut angle	[β] :	105


WTD1-B-1600


دیسکی ۲۱ نفره (سرعت : ۱)
فلکه ۴۰
سیستم ۲:۱

DYNA LIFT
GEARLESS MOTOR

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
دیسکی	۲:۱	۸*۱۰ mm	۱۶	۴۰	۱	۲۱	۱۶۰۰	۲۶	۱۱/۱



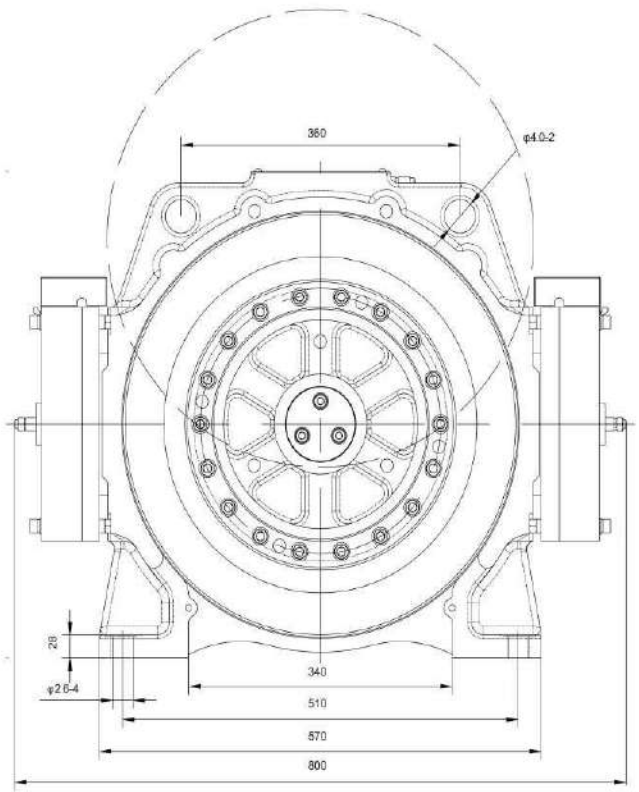

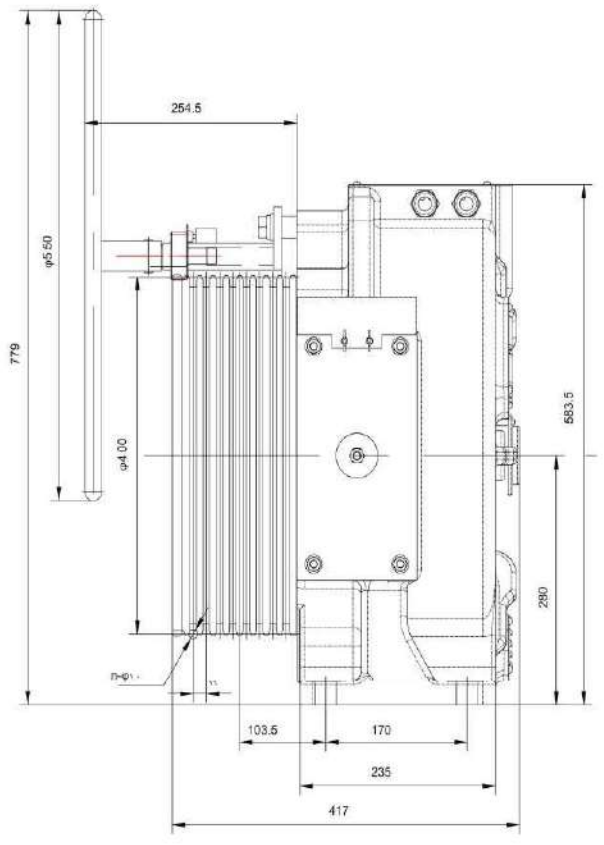

TECHNICAL DATASHEET

Motor type	WTD1-B-1600	
Capacity	1600	[Kg]
Car Speed	1	[m/s]
Rated Voltage	380	[V]
Rated Output	11.1	[kW]
Rated Current	26	[A]
Rated Speed	95	[rpm]
Frequency	23.8	[Hz]
Poles	30	[2p]
Torque	1108	[N.m]
Max Static Load	5500	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-2	
Supply voltage	220	[Vdc]
Current	3	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		400	Ropes Dia :	8	Φ10
Pitch	[mm] :	16	Groove :		Undercut V
Groove Angle	[Y]:	40	Cut angle	[β] :	105


WTD1-B-1600


دیسکی ۲۱ نفره (سرعت : ۱/۶)
فلکه ۴۰
سیستم ۲:۱

DYNA LIFT
GEARLESS MOTOR

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
دیسکی	۲:۱	۸*۱۰ mm	۱۶	۴۰	۱/۶	۲۱	۱۶۰۰	۳۸	۱۷/۷



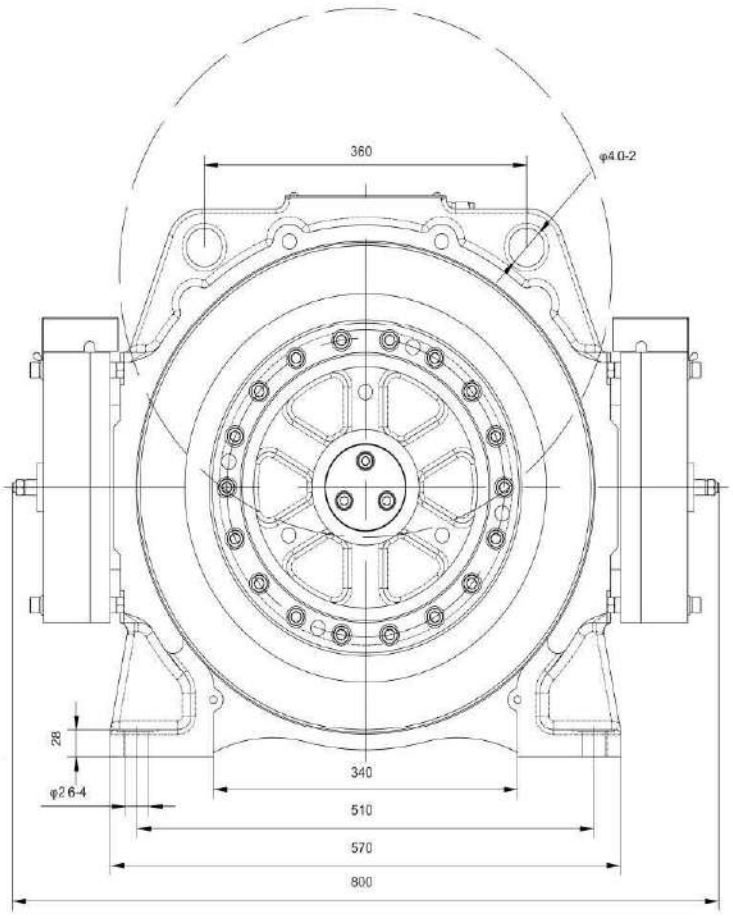

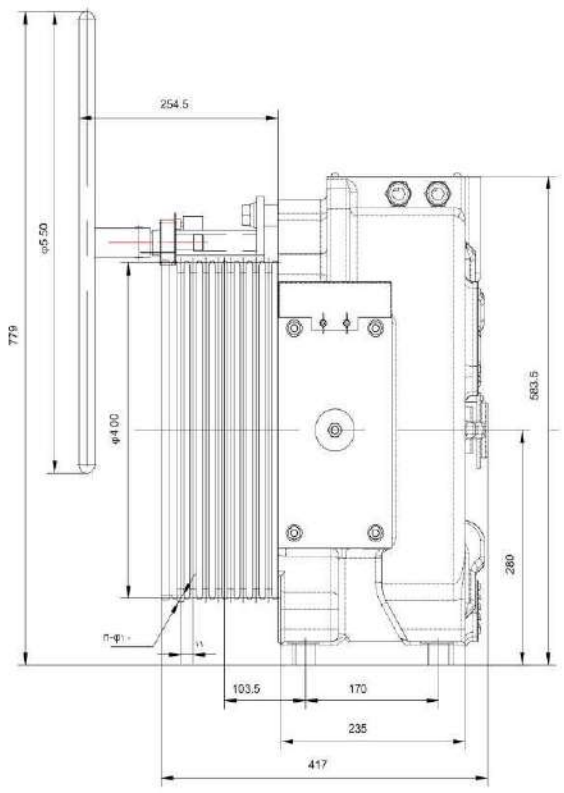

TECHNICAL DATASHEET

Motor type	WTD1-B-1600	
Capacity	1600	[Kg]
Car Speed	1.6	[m/s]
Rated Voltage	380	[V]
Rated Output	17.7	[kW]
Rated Current	45	[A]
Rated Speed	153	[rpm]
Frequency	38.3	[Hz]
Poles	30	[2p]
Torque	11.8	[N.m]
Max Static Load	5500	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-2	
Supply voltage	220	[Vdc]
Current	3	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		400	Ropes Dia :	8	Φ10
Pitch	[mm] :	16	Groove :		Undercut V
Groove Angle	[Y]:	40	Cut angle	[β] :	105


WTD2-B-450


DYNA LIFT
GEARLESS MOTOR

بشکه ای ۶ نفره (سرعت : ۱)
فلکه ۳۲
سیستم ۲:۱

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
بشکه ای	۲:۱	۴*۸ mm	۱۲	۳۲	۱	۶	۴۵۰	۸	۳



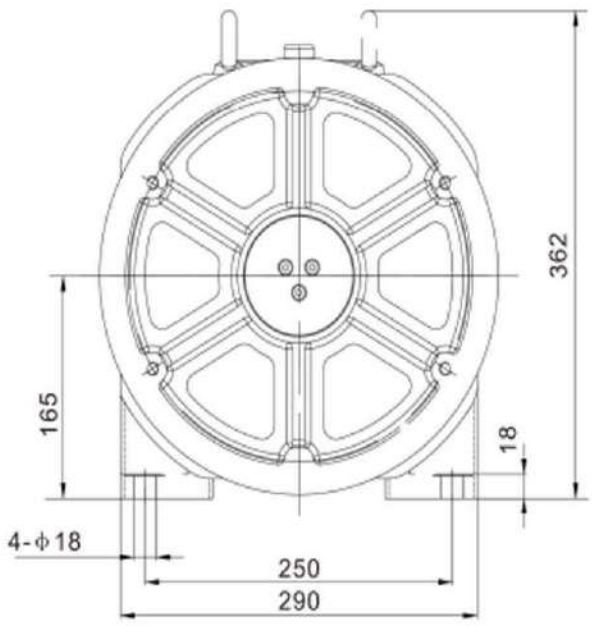

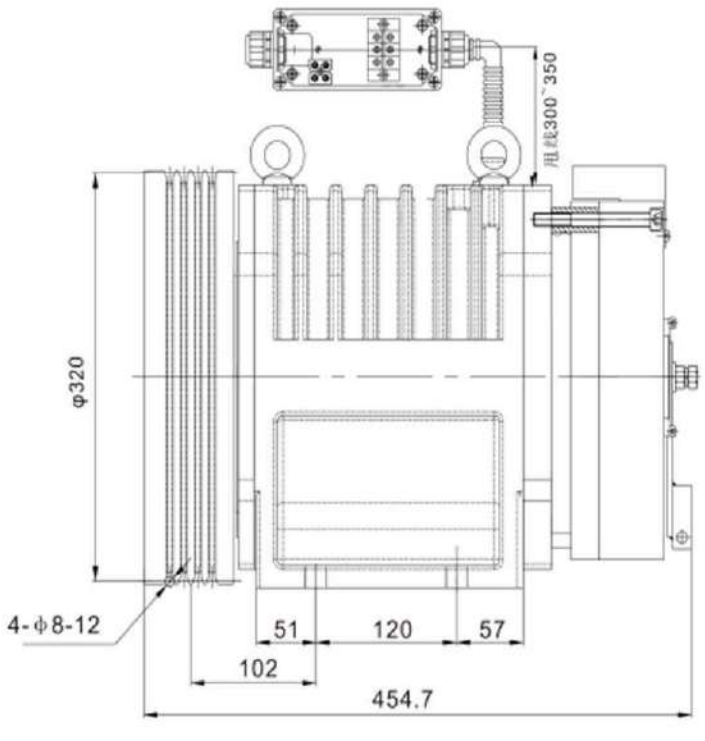

TECHNICAL DATASHEET

Motor type	WTD2-P-450	
Capacity	450	[Kg]
Car Speed	1	[m/s]
Rated Voltage	380	[V]
Rated Output	3	[kW]
Rated Current	8	[A]
Rated Speed	119	[rpm]
Frequency	19.9	[Hz]
Poles	20	[2p]
Torque	240	[N.m]
Max Static Load	2500	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-3	
Supply voltage	220	[Vdc]
Current	2	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		320	Ropes Dia :	4	Φ 8
Pitch	[mm] :	12	Groove :		Undercut U
Groove Angle	[Y]:	30	Cut angle	[β] :	90


WTD2-B-630


DYNA LIFT
GEARLESS MOTOR

بشکه ای ۸ نفره (سرعت : ۱)
فلکه ۳۲
سیستم ۲:۱

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
بشکه ای	۲:۱	۵*۸ mm	۱۲	۳۲	۱	۸	۶۳۰	۱۰	۴/۲



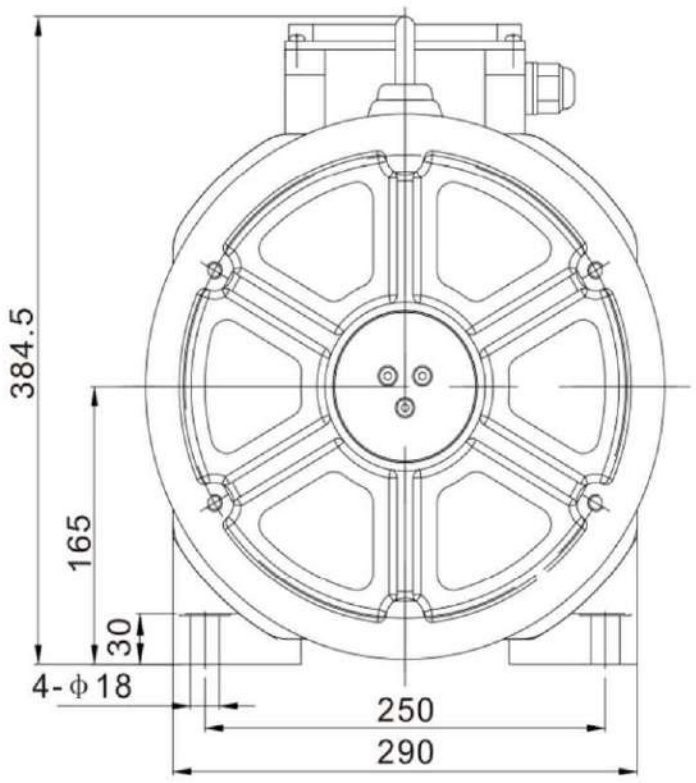

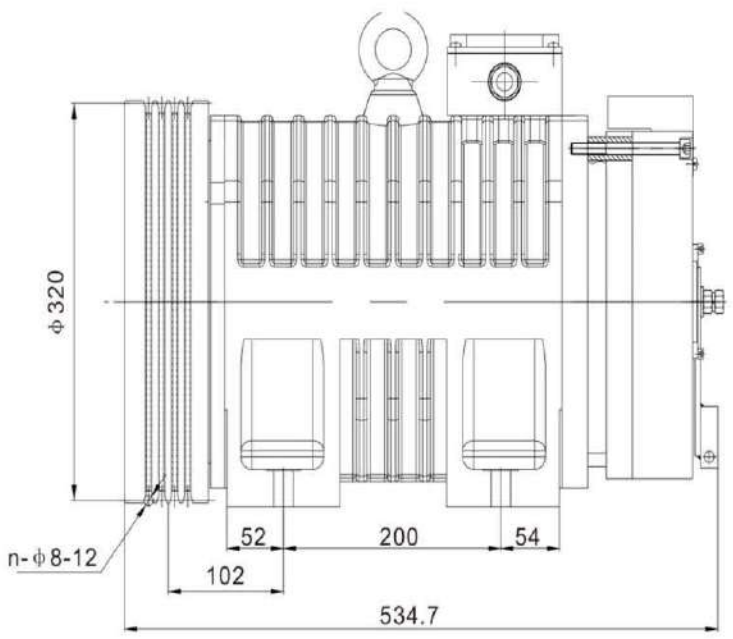

TECHNICAL DATASHEET

Motor type	WTD2-P-630	
Capacity	630	[Kg]
Car Speed	1	[m/s]
Rated Voltage	380	[V]
Rated Output	4.2	[kW]
Rated Current	10	[A]
Rated Speed	119	[rpm]
Frequency	19.9	[Hz]
Poles	20	[2p]
Torque	336	[N.m]
Max Static Load	2500	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-3	
Supply voltage	220	[Vdc]
Current	2	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		320	Ropes Dia :	5	Φ 8
Pitch	[mm] :	12	Groove :		Undercut U
Groove Angle	[Y]:	30	Cut angle	[β] :	90


WTD2-B-630


بشکه ای ۸ نفره (سرعت : ۱/۶)
فلکه ۳۲
سیستم ۲:۱

DYNA LIFT
GEARLESS MOTOR

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
بشکه ای	۲:۱	۵*۸ mm	۱۲	۳۲	۱/۶	۸	۶۳۰	۱۶	۶/۷



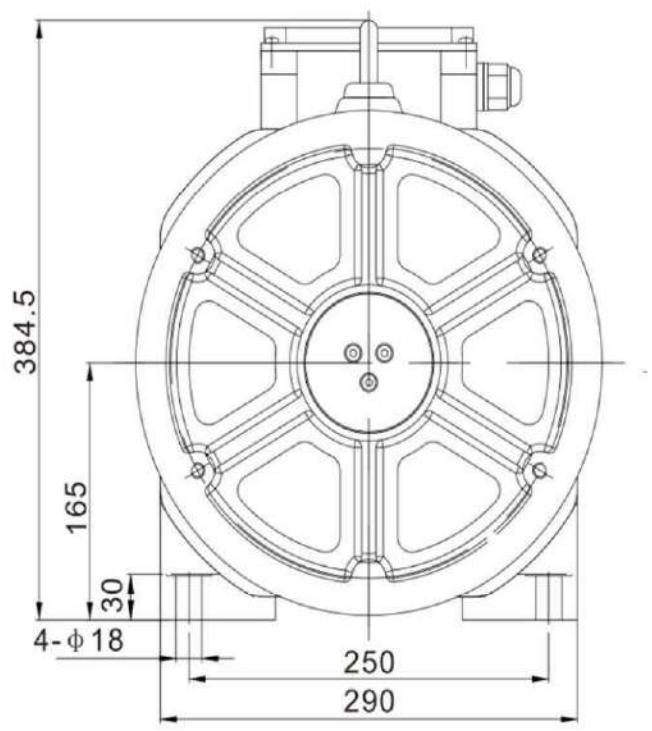

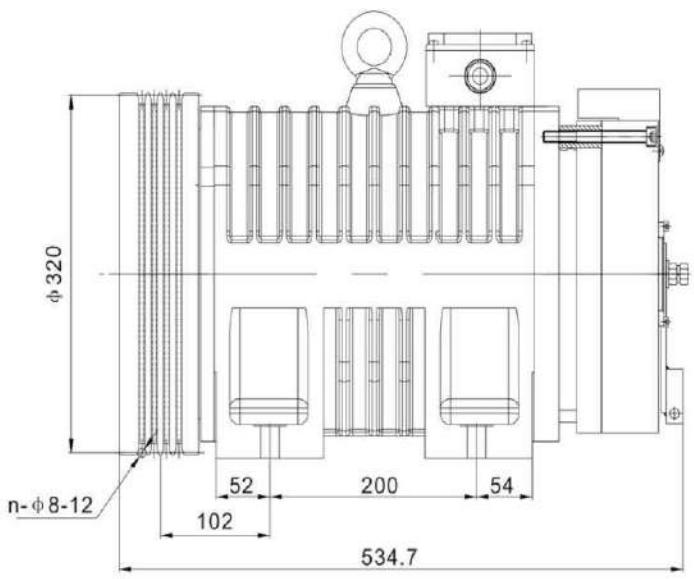

TECHNICAL DATASHEET

Motor type	WTD2-P-630	
Capacity	630	[Kg]
Car Speed	1.6	[m/s]
Rated Voltage	380	[V]
Rated Output	6.7	[kW]
Rated Current	16	[A]
Rated Speed	191	[rpm]
Frequency	31.8	[Hz]
Poles	20	[2p]
Torque	336	[N.m]
Max Static Load	2500	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-3	
Supply voltage	220	[Vdc]
Current	2	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		320	Ropes Dia :	5	Φ 8
Pitch	[mm] :	12	Groove :		Undercut U
Groove Angle	[Y]:	30	Cut angle	[β] :	90


WTD2-B-800


بشکه ای ۱۰ نفره(سرعت : ۱)
فلکه ۳۲
سیستم ۲:۱

DYNA LIFT
GEARLESS MOTOR

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
بشکه ای	۲:۱	۶*۸ mm	۱۲	۳۲	۱	۱۰	۸۰۰	۱۲	۵/۳



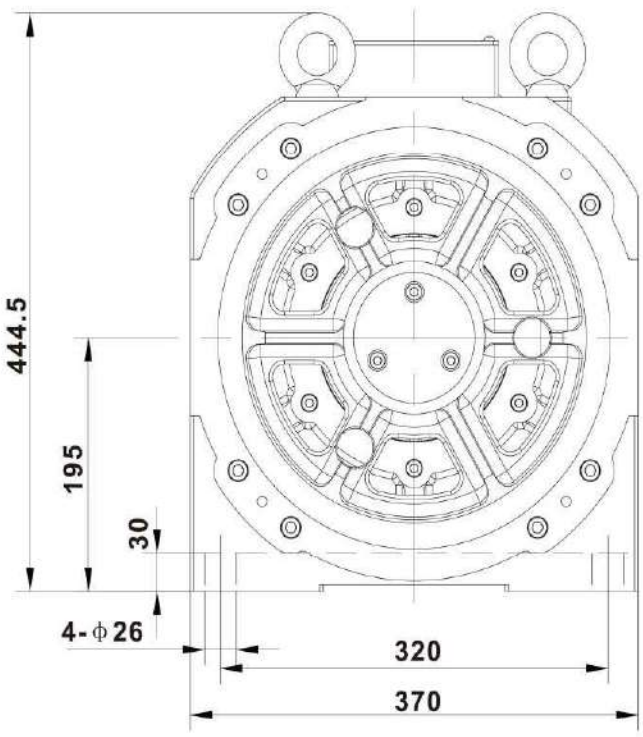

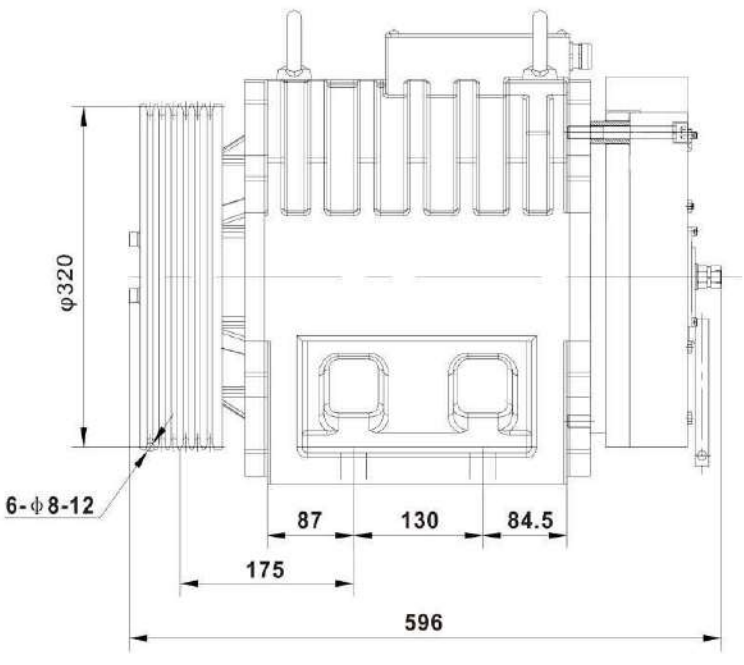

TECHNICAL DATASHEET

Motor type	WTD2-P-800	
Capacity	800	[Kg]
Car Speed	1	[m/s]
Rated Voltage	380	[V]
Rated Output	5.3	[kW]
Rated Current	12	[A]
Rated Speed	119	[rpm]
Frequency	19.9	[Hz]
Poles	20	[2p]
Torque	425	[N.m]
Max Static Load	3500	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-3	
Supply voltage	220	[Vdc]
Current	2	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYAN-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		320	Ropes Dia :		6 Φ 8
Pitch	[mm] :	12	Groove :		Undercut U
Groove Angle	[Y]:	30	Cut angle	[β] :	90


WTD2-B-800


بشکه ای ۱۰ نفره(سرعت : ۱/۶)
فلکه ۳۲
سیستم ۲:۱

DYNA LIFT
GEARLESS MOTOR

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
بشکه ای	۲:۱	۶*۸ mm	۱۲	۳۲	۱/۶	۱۰	۸۰۰	۲۱	۸/۵



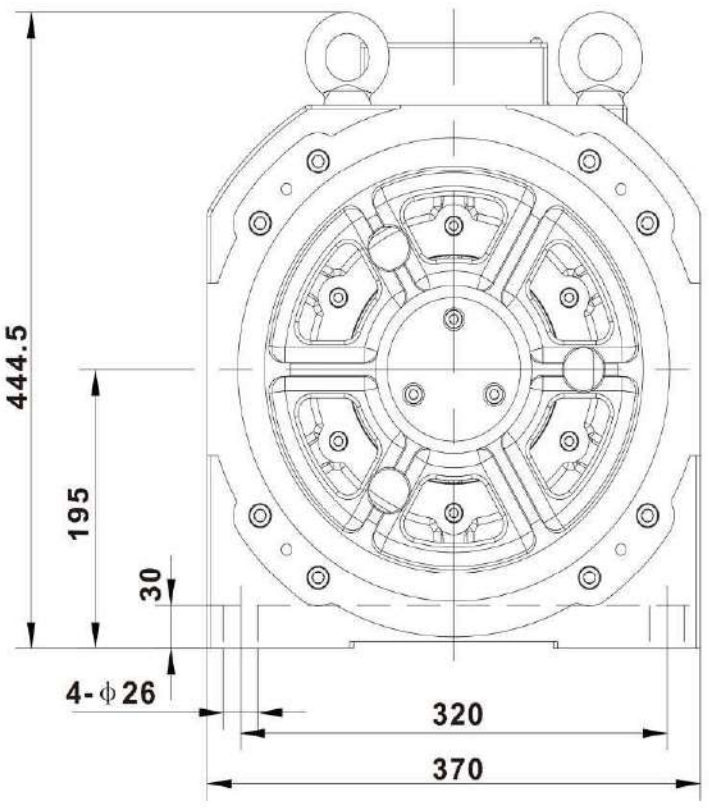

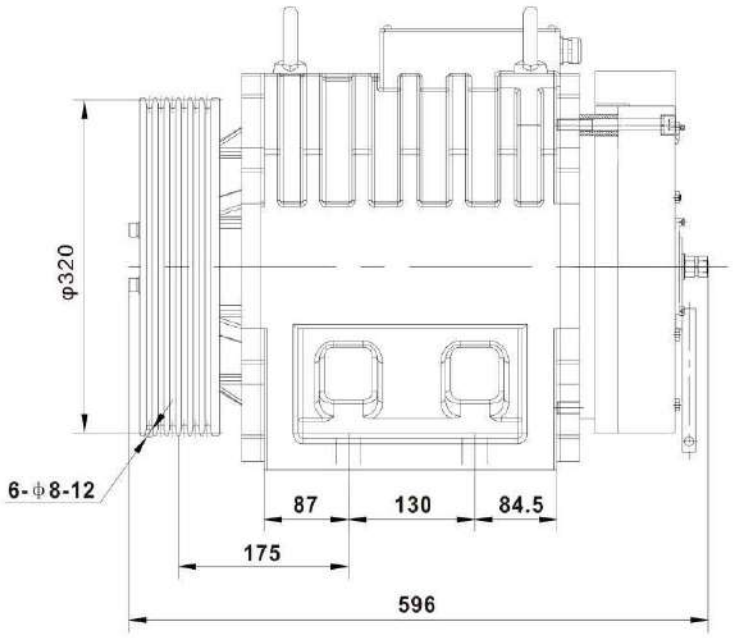

TECHNICAL DATASHEET

Motor type	WTD2-P-800	
Capacity	800	[Kg]
Car Speed	1.6	[m/s]
Rated Voltage	380	[V]
Rated Output	8.5	[kW]
Rated Current	21	[A]
Rated Speed	191	[rpm]
Frequency	31.8	[Hz]
Poles	20	[2p]
Torque	425	[N.m]
Max Static Load	3500	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-3	
Supply voltage	220	[Vdc]
Current	2	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		320	Ropes Dia :		6 Φ 8
Pitch	[mm] :	12	Groove :		Undercut U
Groove Angle	[Y]:	30	Cut angle	[β] :	90


WTD2-B-1000


بشکه ای ۱۳ نفره (سرعت : ۱)
فلکه ۳۲
سیستم ۲:۱

DYNA LIFT
GEARLESS MOTOR

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
بشکه ای	۲:۱	۶*۸ mm	۱۲	۳۲	۱	۱۳	۱۰۰۰	۱۵	۶/۶



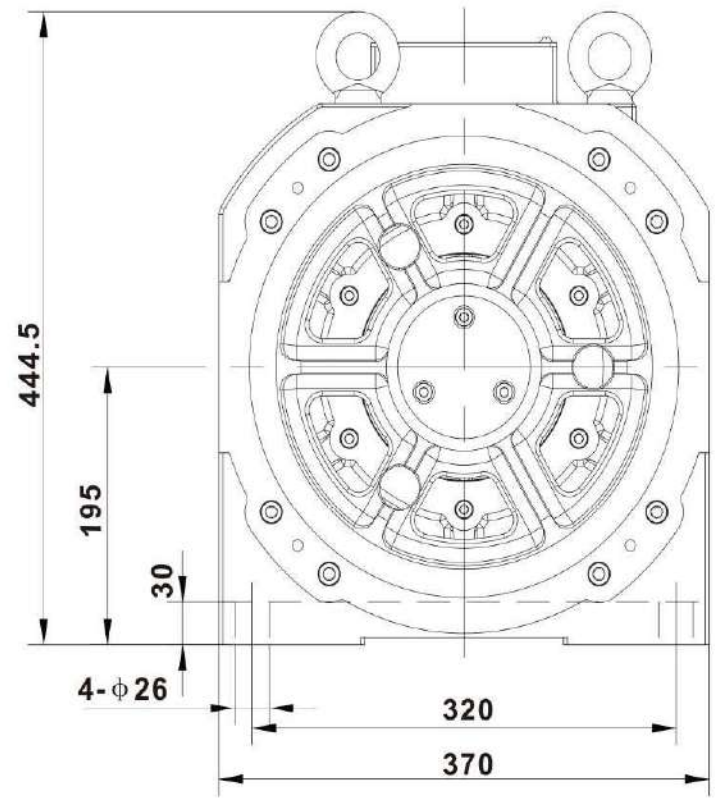

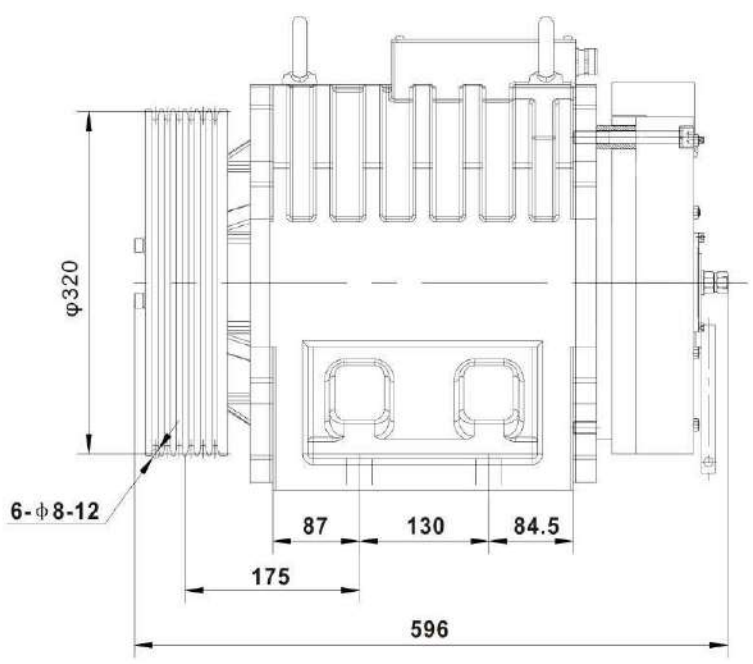

TECHNICAL DATASHEET

Motor type	WTD2-P-1000	
Capacity	1000	[Kg]
Car Speed	1	[m/s]
Rated Voltage	380	[V]
Rated Output	6.6	[kW]
Rated Current	15	[A]
Rated Speed	119	[rpm]
Frequency	19.9	[Hz]
Poles	20	[2p]
Torque	532	[N.m]
Max Static Load	3500	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-3	
Supply voltage	220	[Vdc]
Current	2	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		320	Ropes Dia :	6	Φ 8
Pitch	[mm] :	12	Groove :		Undercut U
Groove Angle	[Y]:	30	Cut angle	[β] :	90


WTD2-B-1000


بشکه ای ۱۳ نفره (سرعت : ۱/۶)
فلکه ۳۲
سیستم ۲:۱

DYNA LIFT
GEARLESS MOTOR

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
بشکه ای	۲:۱	۶*۸ mm	۱۲	۳۲	۱/۶	۱۳	۱۰۰۰	۲۵	۱۰/۶



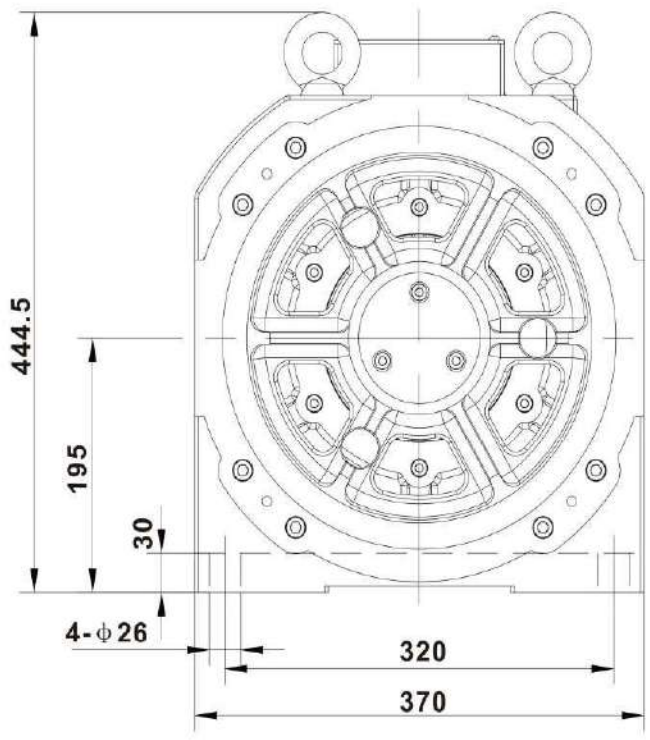

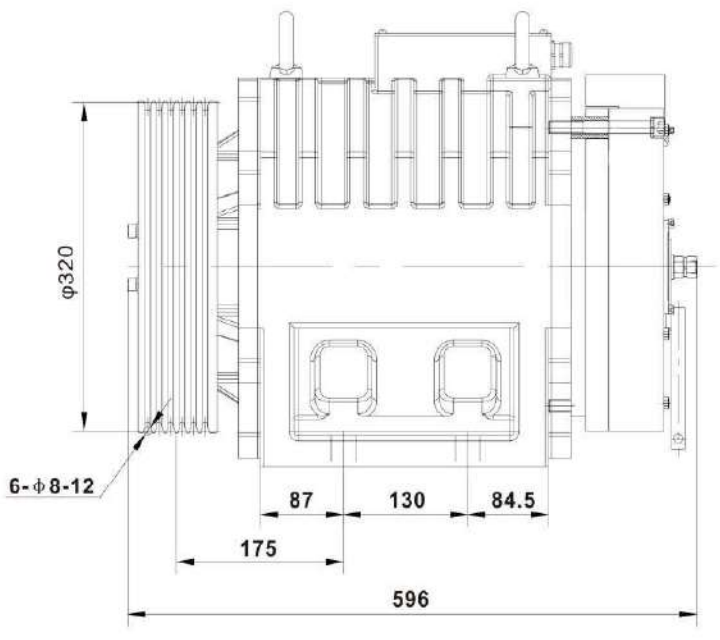

TECHNICAL DATASHEET

Motor type	WTD2-P-1000	
Capacity	1000	[Kg]
Car Speed	1.6	[m/s]
Rated Voltage	380	[V]
Rated Output	10.6	[kW]
Rated Current	25	[A]
Rated Speed	191	[rpm]
Frequency	31.8	[Hz]
Poles	20	[2p]
Torque	532	[N.m]
Max Static Load	3500	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-3	
Supply voltage	220	[Vdc]
Current	2	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		320	Ropes Dia :	6	Φ 8
Pitch	[mm] :	12	Groove :		Undercut U
Groove Angle	[Y]:	30	Cut angle	[β] :	90


WTD2-B-1250


DYNA LIFT
GEARLESS MOTOR

بشکه ای ۱۶ نفره (سرعت : ۱)
فلکه ۳۲
سیستم ۲:۱

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
بشکه ای	۲:۱	۸*۸ mm	۱۲	۳۲	۱	۱۶	۱۲۵۰	۲۰	۸/۲



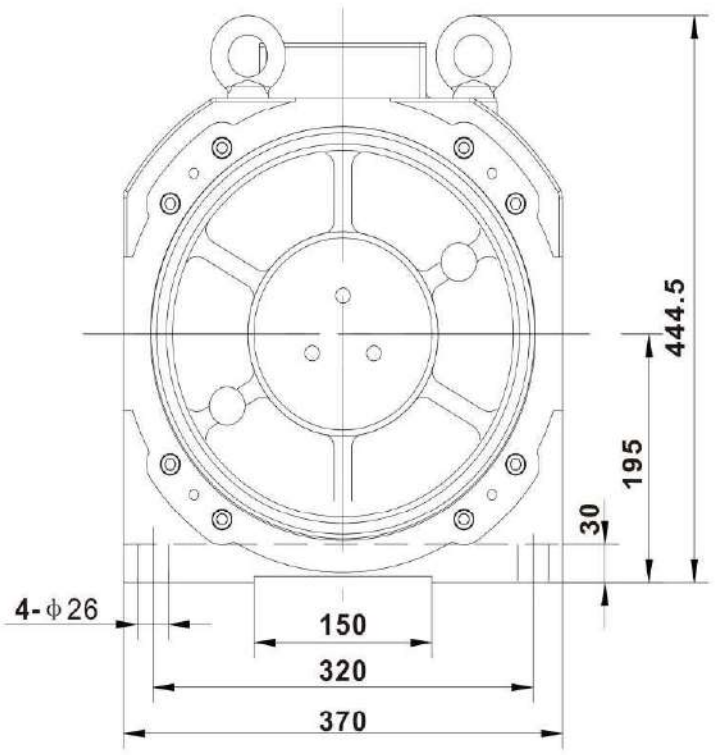

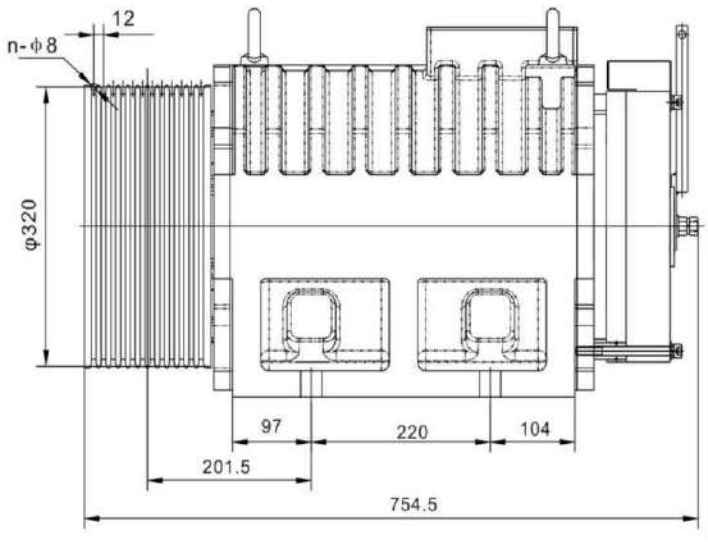

TECHNICAL DATASHEET

Motor type	WTD2-P-1250	
Capacity	1250	[Kg]
Car Speed	1	[m/s]
Rated Voltage	380	[V]
Rated Output	8.2	[kW]
Rated Current	20	[A]
Rated Speed	119	[rpm]
Frequency	19.9	[Hz]
Poles	20	[2p]
Torque	658	[N.m]
Max Static Load	5000	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-3	
Supply voltage	220	[Vdc]
Current	4	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		320	Ropes Dia :		8 Φ 8
Pitch	[mm] :	12	Groove :		Undercut U
Groove Angle	[Y]:	30	Cut angle	[β] :	90


WTD2-B-1250


بشکه ای ۱۶ نفره (سرعت : ۱/۶)
فلکه ۳۲
سیستم ۲:۱

DYNA LIFT
GEARLESS MOTOR

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
بشکه ای	۲:۱	۸*۸ mm	۱۲	۳۲	۱/۶	۱۶	۱۲۵۰	۳۱	۱۳/۲



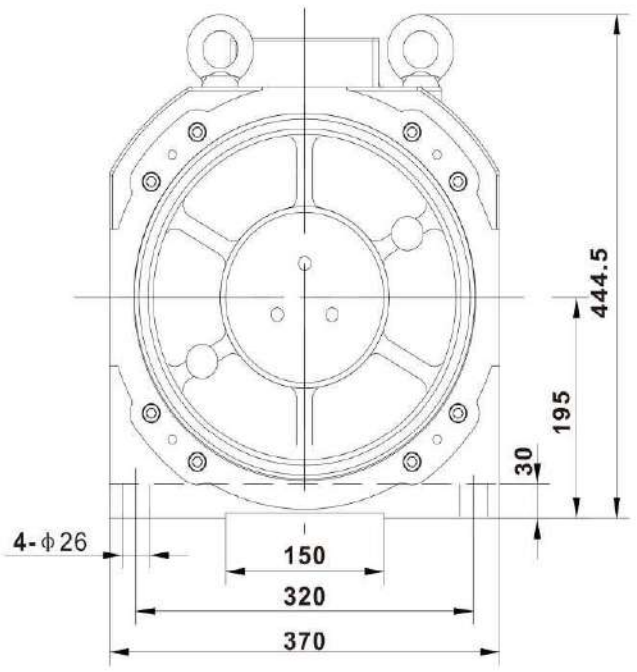

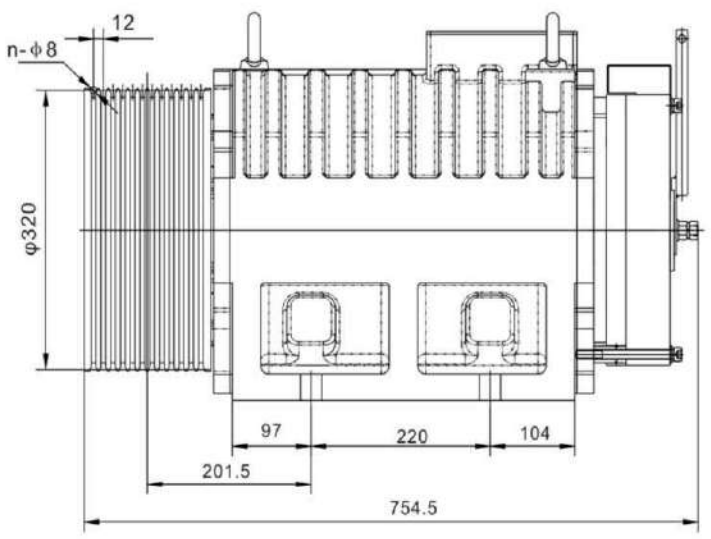

TECHNICAL DATASHEET

Motor type	WTD2-P-1250	
Capacity	1250	[Kg]
Car Speed	1.6	[m/s]
Rated Voltage	380	[V]
Rated Output	13.2	[kW]
Rated Current	31	[A]
Rated Speed	191	[rpm]
Frequency	31.8	[Hz]
Poles	20	[2p]
Torque	658	[N.m]
Max Static Load	5000	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-3	
Supply voltage	220	[Vdc]
Current	4	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		320	Ropes Dia :		8 Φ 8
Pitch	[mm] :	12	Groove :		Undercut U
Groove Angle	[Y]:	30	Cut angle	[β] :	90


WTD2-B-1600


DYNA LIFT
GEARLESS MOTOR

بشکه ای ۲۱ نفره (سرعت : ۱)
فلکه ۳۲
سیستم ۲:۱

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
بشکه ای	۲:۱	۱۰*۸ mm	۱۲	۳۲	۱	۲۱	۱۶۰۰	۲۵	۱۰/۵



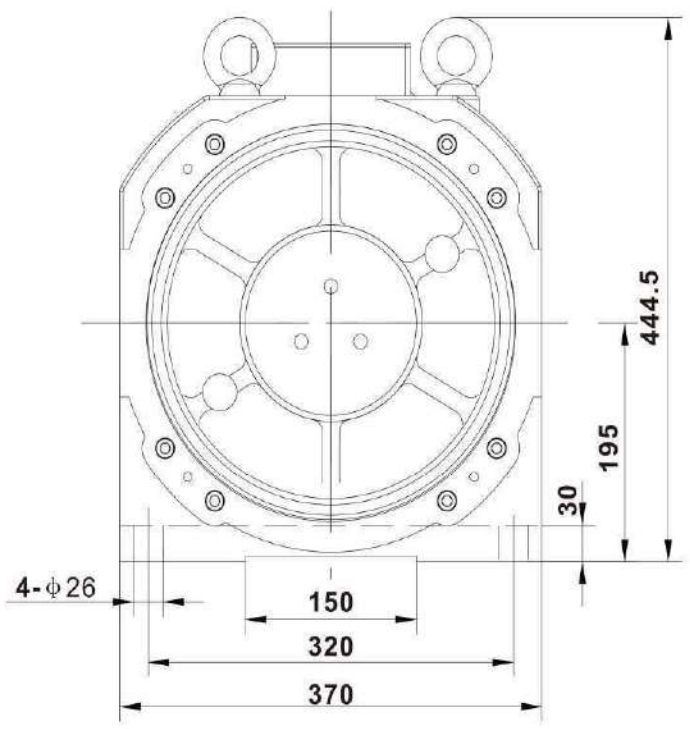

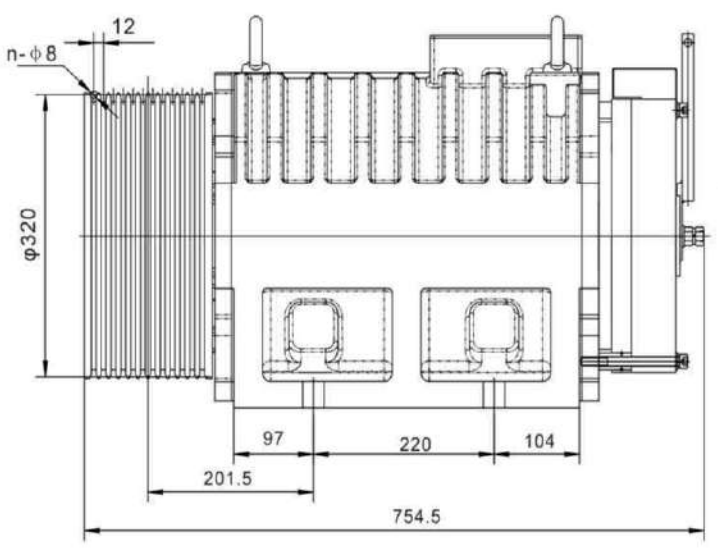

TECHNICAL DATASHEET

Motor type	WTD2-P-1600	
Capacity	1600	[Kg]
Car Speed	1	[m/s]
Rated Voltage	380	[V]
Rated Output	10.5	[kW]
Rated Current	25	[A]
Rated Speed	119	[rpm]
Frequency	19.9	[Hz]
Poles	20	[2p]
Torque	842	[N.m]
Max Static Load	5000	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-3	
Supply voltage	220	[Vdc]
Current	4	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		320	Ropes Dia :	10	Φ 8
Pitch	[mm] :	12	Groove :		Undercut U
Groove Angle	[Y]:	30	Cut angle	[β] :	90


WTD2-B-1600


DYNA LIFT
GEARLESS MOTOR

بشکه ای ۲۱ نفره (سرعت : ۱/۶)
فلکه ۳۲
سیستم ۲:۱

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
بشکه ای	۲:۱	۱۰*۸ mm	۱۲	۳۲	۱/۶	۲۱	۱۶۰۰	۴۳	۱۶/۸



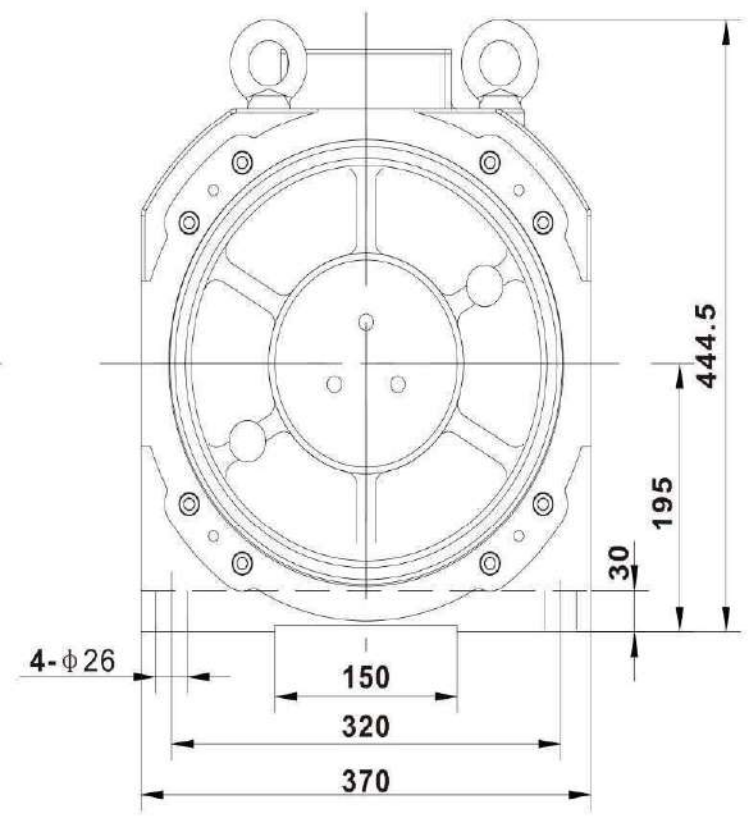

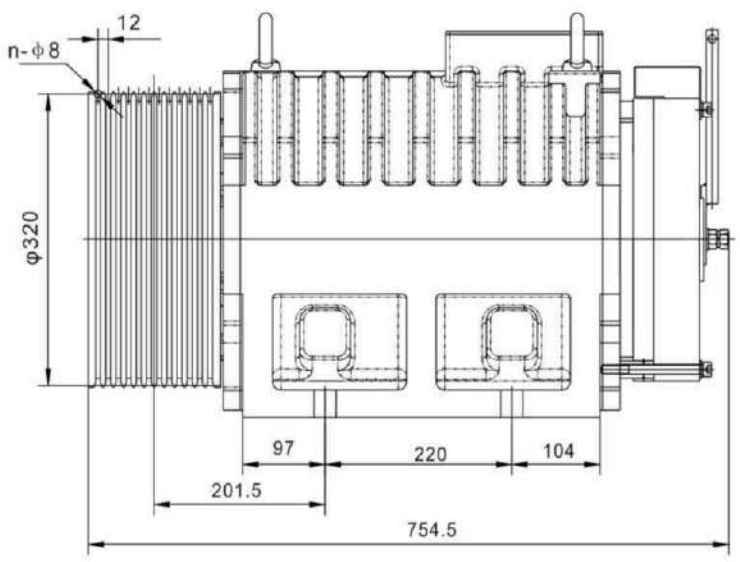

TECHNICAL DATASHEET

Motor type	WTD2-P-1600	
Capacity	1600	[Kg]
Car Speed	1.6	[m/s]
Rated Voltage	380	[V]
Rated Output	16.8	[kW]
Rated Current	42	[A]
Rated Speed	191	[rpm]
Frequency	31.8	[Hz]
Poles	20	[2p]
Torque	842	[N.m]
Max Static Load	5000	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-3	
Supply voltage	220	[Vdc]
Current	4	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		320	Ropes Dia :	10	Φ 8
Pitch	[mm] :	12	Groove :		Undercut U
Groove Angle	[Y]:	30	Cut angle	[β] :	90


WTD1-B-450


DYNA LIFT
GEARLESS MOTOR

دیسکی ۶ نفره (سرعت : ۱)
فلکه ۴۰
سیستم ۱:۱

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
دیسکی	۱:۱	۶*۱۰ mm	۱۶	۴۰	۱	۶	۴۵۰	۱۵	۳/۳



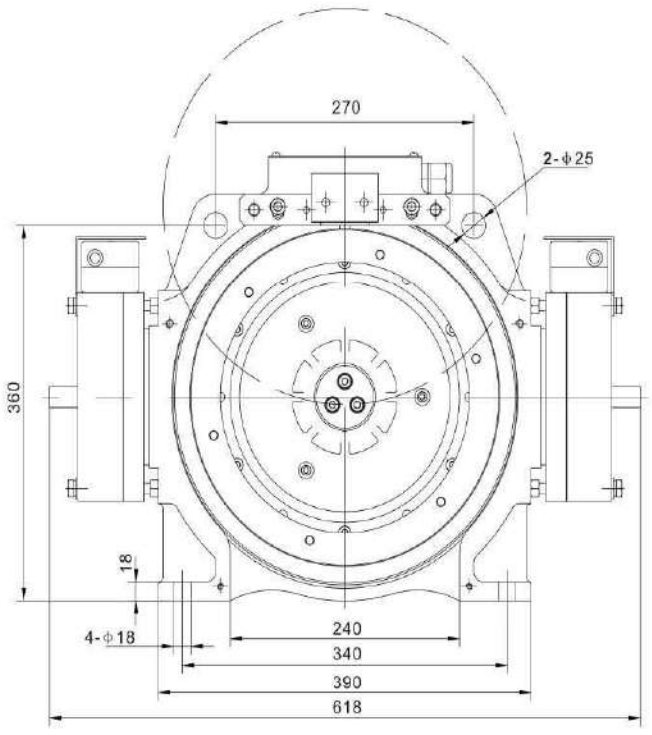

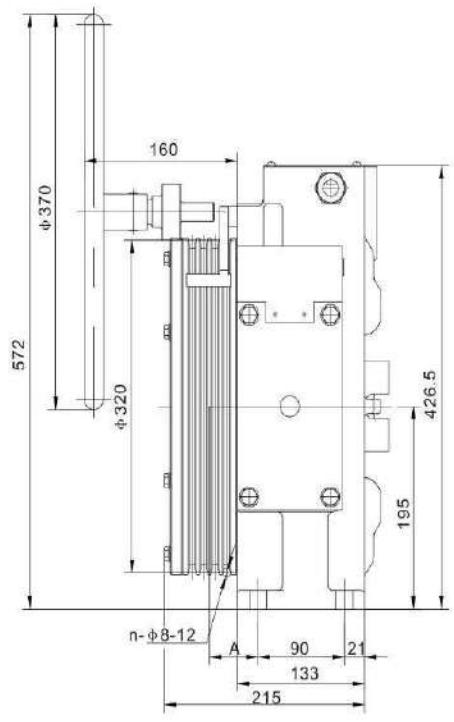

when n=4 ,A=51, when n=5,A=57

TECHNICAL DATASHEET

Motor type	WTD1-B-450	
Capacity	450 in 1:1 suspention	[Kg]
Car Speed	1	[m/s]
Rated Voltage	380	[V]
Rated Output	3.3	[kW]
Rated Current	15	[A]
Rated Speed	48	[rpm]
Frequency	12	[Hz]
Poles	30	[2p]
Torque	665	[N.m]
Max Static Load	3500	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-2	
Supply voltage	220	[Vdc]
Current	1.6	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		400	Ropes Dia :	6	Φ10
Pitch	[mm] :	16	Groove :	Undercut V	
Groove Angle	[Y]:	40	Cut angle	[β] :	105


WTD1-B-630


DYNA LIFT
GEARLESS MOTOR

دیسکی ۸ نفره (سرعت : ۱)
فلکه ۴۰
سیستم ۱:۱

نوع موتور Model	سیم تعلیق Roping	سیم بکسل Ropes	گام فلکه pitch	فلکه Sheave	سرعت Speed	نفرات Person	وزن Capacity(Kg)	آمپر Ratet Current	KW Ratet Output
دیسکی	۱:۱	۶*۱۰ mm	۱۶	۴۰	۱	۸	۶۳۰	۱۸	۴/۱



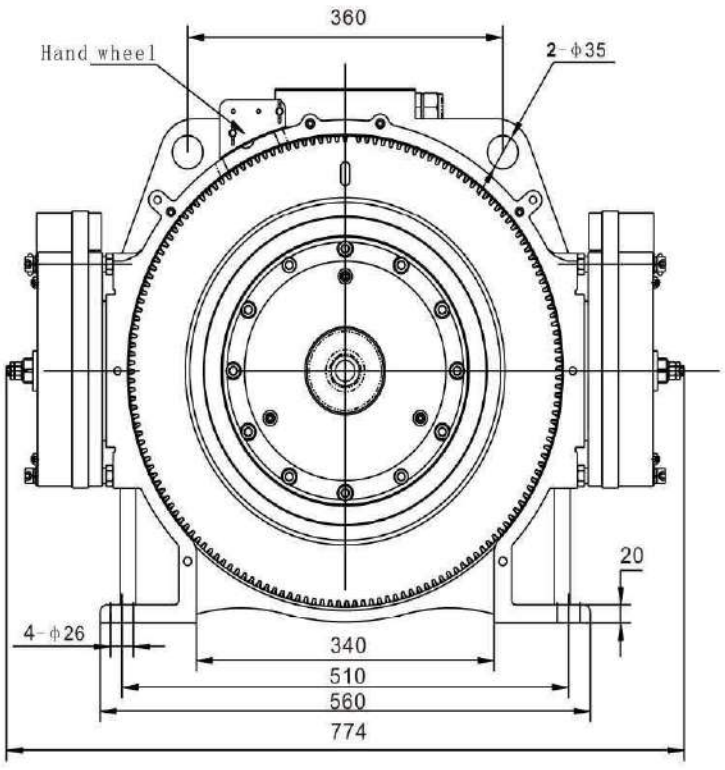

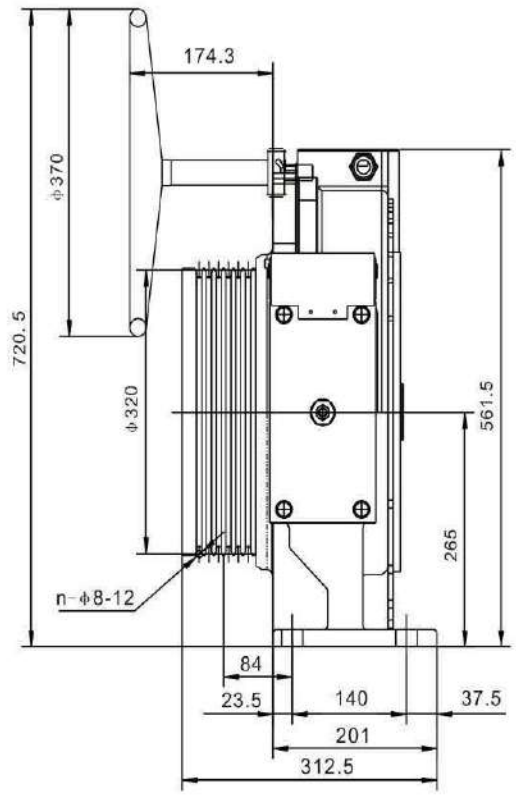

TECHNICAL DATASHEET

Motor type	WTD1-B-630	
Capacity	630 in 1:1 suspention	[Kg]
Car Speed	1	[m/s]
Rated Voltage	380	[V]
Rated Output	4.1	[kW]
Rated Current	18	[A]
Rated Speed	48	[rpm]
Frequency	11.9	[Hz]
Poles	30	[2p]
Torque	866	[N.m]
Max Static Load	5500	[kg]
Wrap	Single	
Insulation	F	
Protection	41	IP

DAYNA-LIFT Brake data

Type	GZD-2	
Supply voltage	220	[Vdc]
Current	2	[A]
Micro-switches	Sealed Subminiature Basic Switch	

DAYNA-LIFT Encoder data

Type	Heidenhain ERN 1387 SinCos 2048 1Vpp
Degree of protection	IP64

Sheave Diameter [mm] :		400	Ropes Dia :	6	Φ10
Pitch	[mm] :	16	Groove :		Undercut V
Groove Angle	[Y]:	40	Cut angle	[β] :	105

Certificate No.
SCMB.0151 rev.2

Date of Issue
28/03/2024

Valid From
28/03/2024

The Certificate is valid until
25/06/2028

EU TYPE-EXAMINATION CERTIFICATE FOR SAFETY COMPONENTS ACCORDING TO EUROPEAN LIFT DIRECTIVE 2014/33/EU ANNEX IV (MODULE B)

Applicant/Certificate Holder (Name & Address):	HEPU POWER CO., LTD. NO.26-1 Yingbin Avenue, Zhaoqing National Hi-Tech Industrial Development Zone, Zhaoqing, Guangdong, China
Manufacturer (Name & Address):	Same as applicant
Date of Submission:	14/03/2024
Test Laboratory (Name & Address):	Shenzhen Institute of Quality & Safety Inspection and Research No.1032, Honggang Road, Luohu District, Shenzhen, Guangdong, China
Date and Number of test report:	28/09/2022 No.: 2022AF0986 28/09/2022 No. :2022AF0987 28/09/2022 No.: 2022AF0988
Approved Type of UCM protection means:	Braking Device as part of the Unintended Car Movement Protection Means
Application of UCM protection means:	Acting on the traction sheave, as part of the protection device against unintended car movement
Model:	GZD-2(2×850Nm), GZD-2(2×1400Nm), GZD-2(2×2400Nm)
Drawing Number *(attached to this certificate)*:	5HP270166, 5HP270088, 5HP270199
Standard(s):	EN81-50:2020
Reference Standard(s)	EN81-20:2020

EUROCERT SA, aforementioned notified body with identification number 1128,
ascertains and certifies that above safety component satisfy the safety requirements of the European Directive 2014/33/EU.
The manufacturer is authorized to provide the safety component described above with the CE Mark as displayed below:

CE 1128

Preconditions:
It is required that the above safety equipment must always come with a declaration of conformity and the relevant instructions of use.

Please check the validity of the certificate from our website using the password **eJ3vA0aV**

Certificate History:

Revision No.	Description	Issue Date
0	Initial Certificate	26/06/2018
1	Updated the type test report, new range of Annex A and Annex B	03/02/2023
2	Updated the type test report, new brake force in Annex A and Annex B	28/03/2024

On behalf of EUROCERT S.A.,

EUROPEAN INSPECTION AND CERTIFICATION COMPANY S.A. EURO CERT GEORGE N. SIFONIOS N.B. 1128

Director of International Markets

INSPECTOR

CHAD WANG

The data of this certificate were gathered with every possible thoroughness.
This certificate reflects the findings of the time and place of the audit.
Reproduction of this document is strictly forbidden.

EUROCERT S.A. 89 Chlois & Lykovriseos str., 144 52, Metamorphosi – Greece
T +30 210 62.52.495, +30 210 62.53.927, **F** +30 210 62.03.018, **M** info@eurocert.gr

ΕΣΥΔ
Product Certification
Cert. No.: 21

Certificate No.
SCMB.0152 rev.2

Date of Issue
28/03/2024

Valid From
28/03/2024

The Certificate is valid until
25/06/2028

EU TYPE-EXAMINATION CERTIFICATE FOR SAFETY COMPONENTS ACCORDING TO EUROPEAN LIFT DIRECTIVE 2014/33/EU ANNEX IV (MODULE B)

Applicant/Certificate Holder (Name & Address):	HEPU POWER CO., LTD. NO.26-1 Yingbin Avenue, Zhaoqing National Hi-Tech Industrial Development Zone, Zhaoqing, Guangdong, China
Manufacturer (Name & Address):	Same as applicant
Date of Submission:	14/03/2024
Test Laboratory (Name & Address):	Shenzhen Institute of Quality & Safety Inspection and Research No.1032, Honggang Road, Luohu District, Shenzhen, Guangdong, China
Date and Number of test report:	11/12/2023 No.: 2023AF1193 11/12/2023 No. :2023AF1192 20/09/2022 No.: 2022AF0968
Approved Type of ascending car overspeed protection means:	Braking Device as part of the Lift Ascending Car Overspeed Protection Means
Application of ascending car overspeed protection means:	Acting on the traction sheave, as part of the protection device against overspeed of the car moving in upwards direction
Model:	GZD-2(2×850Nm), GZD-2(2×1400Nm), GZD-2(2×2400Nm)
Drawing Number *(attached to this certificate):*	5HP270166, 5HP270088, 5HP270199
Standard(s):	EN81-50:2020
Reference Standard(s)	EN81-20:2020

EUROCERT SA, aforementioned notified body with identification number 1128,
ascertains and certifies that above safety component satisfy the safety requirements of the European Directive 2014/33/EU.
The manufacturer is authorized to provide the safety component described above with the CE Mark as displayed below:

CE 1128

Preconditions:
It is required that the above safety equipment must always come with a declaration of conformity and the relevant instructions of use.

Please check the validity of the certificate from our website using the password **bK8gC5cP**

Certificate History:

Revision No.	Description	Issue Date
0	Initial Certificate	26/06/2018
1	Updated the type test report, new range of Annex A and Annex B	03/02/2023
2	Updated the type test report, new brake force in Annex A and Annex B	28/03/2024

On behalf of EUROCERT S.A.,
GEORGE N. GIFONIAS
Director of International Markets

INSPECTOR
CHAD WANG

The data of this certificate were gathered with every possible thoroughness.
This certificate reflects the findings of the time and place of the audit.
Reproduction of this document is strictly forbidden.

EUROCERT S.A. 89 Chlois & Lykovriseos str., 144 52, Metamorphosi – Greece
T +30 210 62.52.495, +30 210 62.53.927, **F** +30 210 62.03.018, **M** info@eurocert.gr

ESYD
Product Certification
Cert. No.: 21
ΔΠ13.6/E20/16-01-2014

Certificate No.
SCMB.0468

Date of Issue
02/01/2024

Valid From
02/01/2024

The Certificate is valid until
01/01/2034

EU TYPE-EXAMINATION CERTIFICATE FOR SAFETY COMPONENTS ACCORDING TO EUROPEAN LIFT DIRECTIVE 2014/33/EU ANNEX IV (MODULE B)

Applicant/Certificate Holder (Name & Address):	HEPU POWER CO., LTD. NO.26-1 Yingbin Avenue, Zhaoqing National Hi-Tech Industrial Development Zone, Zhaoqing, Guangdong, China
Manufacturer (Name & Address):	Same as applicant
Date of Submission:	01/12/2023
Test Laboratory (Name & Address):	Shenzhen Institute of Quality & Safety Inspection and Research TeJian Building,1032 HongGang Road, Luohu District, Shenzhen, Guangdong Province, China
Date and Number of test report:	17/11/2023 2023AF1123 17/11/2023 2023AF1116
Approved Type of UCM protection means:	Braking device as part of the Unintended Car Movement Protection (UCMP) means and Ascending Car Overspeed Protection (ACOP) means.
Application of UCM protection means:	Acting on the traction sheave shaft, as part of the protection device against unintended car movement and as part of the ascending car overspeed protection.
Model:	GZD-3 (2×700Nm)
***Drawing Number** (attached to this certificate):*	5HP270231
Standard(s):	EN81-50:2020
Reference Standard(s)	EN81-20:2020

EUROCERT SA, aforementioned notified body with identification number 1128,
ascertains and certifies that above safety component satisfy the safety requirements of the European Directive 2014/33/EU.
The manufacturer is authorized to provide the safety component described above with the CE Mark as displayed below:

CE 1128

Preconditions:

It is required that the above safety equipment must always come with a declaration of conformity and the relevant instructions of use.

Please check the validity of the certificate from our website using the password **rB6kB5rC**

On behalf of EUROCERT S.A.,

EUROPEAN INSPECTION AND CERTIFICATION COMPANY S.A. EUROCERT N.B. 1128

GEORGE N. SIFONIOS
Director of International Markets

INSPECTOR

CHAD WANG

The data of this certificate were gathered with every possible thoroughness.
This certificate reflects the findings of the time and place of the audit.
Reproduction of this document is strictly forbidden.

EUROCERT S.A. 89 Chlois & Lykovriseos str., 144 52, Metamorphosi – Greece
T +30 210 62.52.495, +30 210 62.53.927, **F** +30 210 62.03.018, **M** info@eurocert.gr

ΕΣΥΔ
Product Certification
Cert. No.: 21

ΑΠ13.6/Ε20/16-01-2014

Certificate No.
SCMB.0469

Date of Issue
02/01/2024

Valid From
02/01/2024

The Certificate is valid until
01/01/2034

EU TYPE-EXAMINATION CERTIFICATE FOR SAFETY COMPONENTS ACCORDING TO EUROPEAN LIFT DIRECTIVE 2014/33/EU ANNEX IV (MODULE B)

Applicant/Certificate Holder (Name & Address):	HEPU POWER CO., LTD. NO.26-1 Yingbin Avenue, Zhaoqing National Hi-Tech Industrial Development Zone, Zhaoqing, Guangdong, China
Manufacturer (Name & Address):	Same as applicant
Date of Submission:	01/12/2023
Test Laboratory (Name & Address):	Shenzhen Institute of Quality & Safety Inspection and Research TeJian Building,1032 HongGang Road, Luohu District, Shenzhen, Guangdong Province, China
Date and Number of test report:	17/11/2023 2023AF1124 17/11/2023 2023AF1117
Approved Type of UCM protection means:	Braking device as part of the Unintended Car Movement Protection (UCMP) means and Ascending Car Overspeed Protection (ACOP) means.
Application of UCM protection means:	Acting on the traction sheave shaft, as part of the protection device against unintended car movement and as part of the ascending car overspeed protection.
Model:	GZD-3 (2×1350Nm)
***Drawing Number** (attached to this certificate):*	5HP270252
Standard(s):	EN81-50:2020
Reference Standard(s)	EN81-20:2020

EUROCERT SA, aforementioned notified body with identification number 1128,
ascertains and certifies that above safety component satisfy the safety requirements of the European Directive 2014/33/EU.
The manufacturer is authorized to provide the safety component described above with the CE Mark as displayed below:

CE 1128

Preconditions:
It is required that the above safety equipment must always come with a declaration of conformity and the relevant instructions of use.
Please check the validity of the certificate from our website using the password **bW1wH3gE**

On behalf of EUROCERT S.A.,
GEORGE N. SIFONIOS
Director of International Markets

INSPECTOR
CHAD WANG

The data of this certificate were gathered with every possible thoroughness.
This certificate reflects the findings of the time and place of the audit.
Reproduction of this document is strictly forbidden.

EUROCERT S.A. 89 Chlois & Lykovriseos str., 144 52, Metamorphosi – Greece
T +30 210 62.52.495, +30 210 62.53.927, **F** +30 210 62.03.018, **M** info@eurocert.gr

Product Certification
Cert. No.: 21