موتورهای آسانسور گیرلس

جنتل رایز

Gentle-rise

موتور های دیسکی- سیستم ۲:۱

1 دیسکی ۶ نفر

2 دیسکی ۸ نفر – فلکه ۳۲

3 دیسکی ۸-۱۰-۱۳ نفر -فلکه ۴۰

4 دیسکی ۱۶ -۲۱ نفر -فلکه ۴۰

5 دیسکی ۲۶ نفر -فلکه ۴۸

موتور های بشکه ای-سیستم ۲:۱

6 بشکه ای ۶ نفر-فلکه ۳۲

7 بشکه ای ۸ نفر -فلکه ۳۲

8 بشکه ای ۱۰ -۱۳ نفر -فلکه ۳۲

9 بشکه ای ۱۶ -۲۱ نفر -فلکه ۳۲

موتور های دیسکی -سیستم ۱:۱

10 دیسکی ۶ نفر ۱:۱

11 دیسکی ۸ نفر ۱:۱

گواهینامه های ترمز	Certificate
SCMB.0152 Rev1	12-15
SCMB.0152 Rev.2	16-20
SCMB.468	21-24

BEHFARAZ
Hydraulic & gearless elevators equipment

GentleRise

موتور دیسکی ۶ نفر-فلکه ۳۲-سیستم ۲:۱

BEHFARAZ
Hydraulic & gearless elevators equipment

مدل موتور Model	ظرفیت (کیلوگرم) Capacity (kg)	سرعت آسانسور Elevator Speed (m/s)	توان Rated Output (kW)	جریان Rated Current (A)	دور در دقیقه Rated Speed (rpm)	فرکانس Frequency (Hz)	قطر فلکه Sheave Diameter (mm)	تعداد قطب Poles (2p)	گشتاور Torque (N.m)	گام * سایز شیار * تعداد شیار Ropes	نوع شیار Groove	زاویه برش Cut Angle	زاویه شیار Groove Angle
WTD1-B450-100D	450	1.0	3.0	8	119	19.9	320	20	240	4×Φ8×12	Undercut V	β=105°	γ=40°
WTD1-B450-160D	450	1.6	4.8	12	191	31.8	320	20	240	4×Φ8×12	Undercut V	β=105°	γ=40°

WTD1-B450-630(ϕ320) SERIES

Roping 2:1

- **Rated Voltage: AC380V**
- **Brake Voltage: DC220V**
- **Duty : S5 - 40%**
- **Max. Static Load: 2000kg**
- **Wrap: Single**
- **Insulation: F**
- **Protection: Ip41**
- **Traveling Height: ≤60 m**

KC Certification from South Korea

ISO45001 — **IATF16949T** — **ISO14001** — **ISO9001**

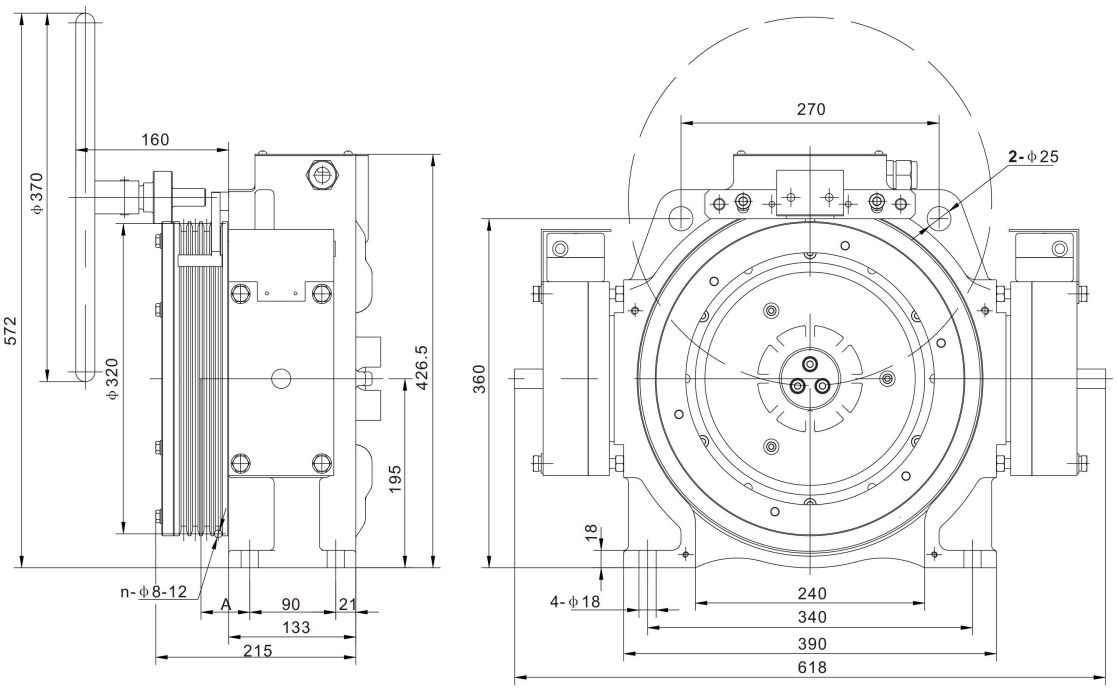

when n=4 ,A=51, when n=5,A=57

پکیج خدماتی

درخت سیم شیلددار ضد نویز

پکیج پیچ و مهره فولادی کلاس ۸

چرا جنتل رایز انتخاب بهینه است؟

- تولید توسط برنده جایزه تعالی نوآوری چین
- تولیدکننده موتور برای خودروسازهای بین‌المللی
- استفاده از برترین متریال‌ها و آلیاژ مغناطیس دائم
- انکدر هایدن هاین ۱۳۸۷
- استفاده از فناوری Stabila برای ثبات عملکرد و عدم لرزش موتور
- تولید رباتیک با خطای نزدیک به صفر
- ۵ سال گارانتی سراسری
- پیشتیبانی آسانسور ۱۱۰

GentleRise

موتور دیسکی ۸ نفر- فلکه ۳۲- سیستم ۲:۱

BEHFARAZ
Hydraulic & gearless elevators equipment

مدل موتور Model	ظرفیت (کیلوگرم) Capacity (kg)	سرعت آسانسور Elevator Speed (m/s)	توان Rated Output (kW)	جریان Rated Current (A)	دور در دقیقه Rated Speed (rpm)	فرکانس Frequency (Hz)	قطر فلکه Sheave Diameter (mm)	تعداد قطب Poles (2p)	گشتاور Torque (N.m)	گام * سایز شیار * تعداد شیار Ropes	نوع شیار Groove	زاویه برش Cut Angle	زاویه شیار Groove Angle
WTD1-B630-100D	630	1.0	4.2	10	119	29.9	320	30	336	6×Φ8×12	Undercut V	β=105°	γ=40°
WTD1-B630-160D	630	1.6	6.7	17	191	47.8	320	20	336	6×Φ8×12	Undercut V	β=105°	γ=40°

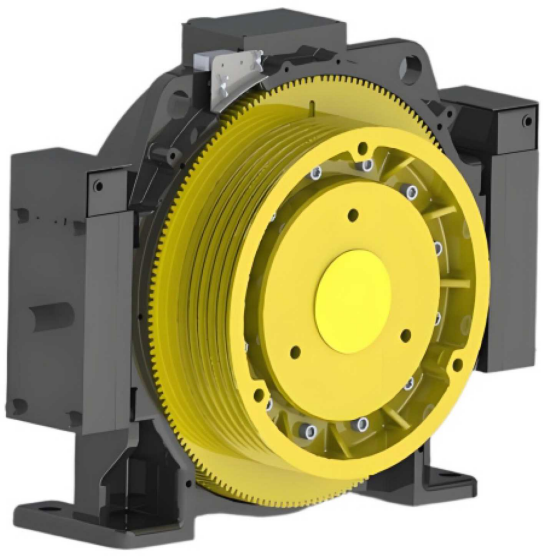

WTD1-B1000 (ϕ320) SERIES

Roping 2:1

- **Rated Voltage: AC380V**
- **Brake Voltage: DC220V**
- **Duty ： S5 - 40%**
- **Max. Static Load: 3500kg**
- **Wrap: Single**
- **Insulation: F**
- **Protection: Ip41**
- **Traveling Height: ≤90 m**

KC Certification from South Korea

ISO45001 — **IATF16949T** — **ISO14001** — **ISO9001**

پکیج خدماتی

درخت سیم شیلددار ضد نویز

پکیج پیچ و مهره فولادی کلاس ۸

چرا جنتل رایز انتخاب بهینه است؟

- تولید توسط برنده جایزه تعالی نوآوری چین
- تولیدکننده موتور برای خودروسازهای بین‌المللی
- استفاده از برترین متریال‌ها و آلیاژ مغناطیس دائم
- انکدر هایدن هاین ۱۳۸۷
- استفاده از فناوری Stabila برای ثبات عملکرد و عدم لرزش موتور
- تولید رباتیک با خطای نزدیک به صفر
- ۵ سال گارانتی سراسری
- پیشتیبانی آسانسور ۱۱۰

GentleRise

موتور دیسکی ۸ – ۱۰ – ۱۳ نفر– فلکه ۴۰–سیستم ۲:۱

BEHFARAZ
Hydraulic & gearless elevators equipment

مدل موتور Model	ظرفیت (کیلوگرم) Capacity (kg)	سرعت آسانسور Elevator Speed (m/s)	توان Rated Output (kW)	جریان Rated Current (A)	دور در دقیقه Rated Speed (rpm)	فرکانس Frequency (Hz)	قطر فلکه Sheave Diameter (mm)	تعداد قطب Poles (2p)	گشتاور Torque (N.m)	گام * سایز شیار * تعداد شیار Ropes	نوع شیار Groove	زاویه برش Cut Angle	زاویه شیار Groove Angle
WTD1-B630-100D-40	630	1.0	4.2	10	95	23.8	400	30	420	4×Φ10×16	Undercut V	β=105°	γ=40°
WTD1-B630-160D-40	630	1.6	6.7	17	153	38.3	400	30	420	4×Φ10×16	Undercut V	β=105°	γ=40°
WTD1-B800-100D-40	800	1.0	5.3	12	95	23.8	400	30	532	5×Φ10×16	Undercut V	β=105°	γ=40°
WTD1-B800-160D-40	800	1.6	8.5	21	153	38.3	400	30	532	5×Φ10×16	Undercut V	β=105°	γ=40°
WTD1-B1000-100D-40	1000	1.0	6.6	15	95	23.8	400	30	665	6×Φ10×16	Undercut V	β=105°	γ=40°
WTD1-B1000-160D-40	1000	1.6	10.6	25	153	38.3	400	30	665	6×Φ10×16	Undercut V	β=105°	γ=40°

WTD1- 1000 (φ400) SERIES

Roping 2:1

- **Rated Voltage: AC380V**
- **Brake Voltage: DC220V**
- **Duty ： S5 - 40%**
- **Max. Static Load: 3500kg**
- **Wrap: Single**
- **Insulation: F**
- **Protection: Ip41**
- **Traveling Height: ≤90 m**

KC Certification from South Korea

ISO45001 — **IATF16949T** — **ISO14001** — **ISO9001**

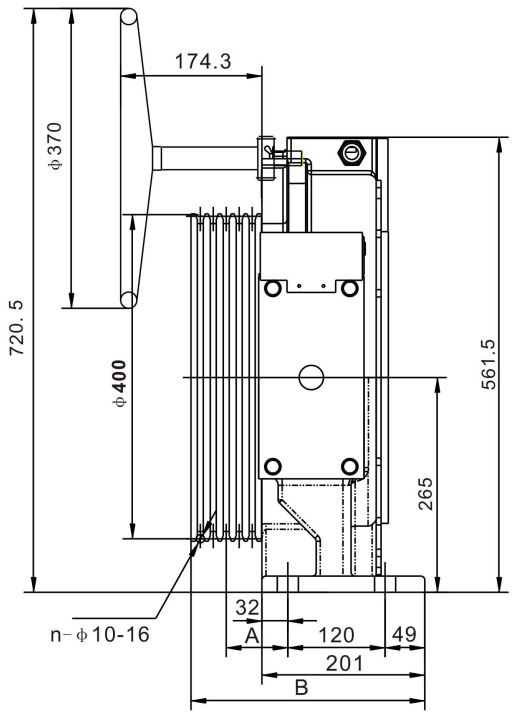

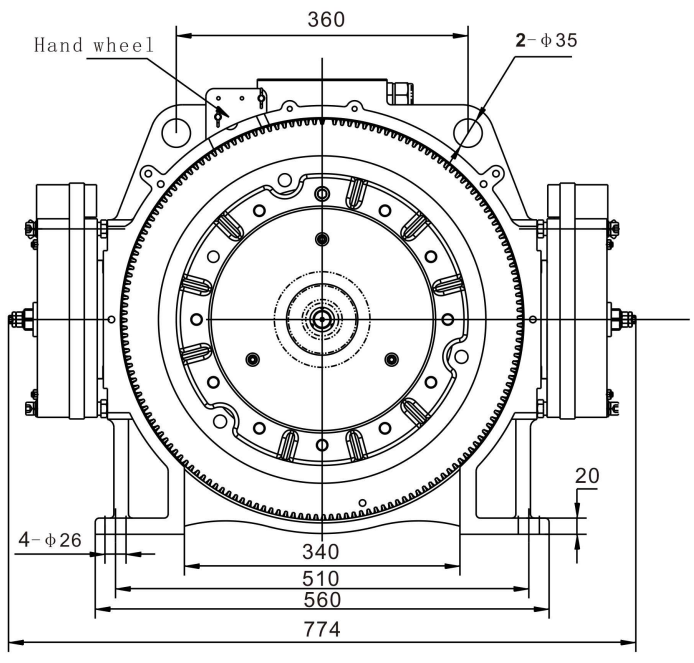

when n=4 or 5,A=76, B=288.5, when n=6,A=84, B=304.5.

پکیج خدماتی

درخت سیم شیلددار ضد نویز

پکیج پیچ و مهره فولادی کلاس ۸

چرا جنتل رایز انتخاب بهینه است؟

- تولید توسط برنده جایزه تعالی نوآوری چین
- تولیدکننده موتور برای خودروسازهای بین‌المللی
- استفاده از برترین متریال‌ها و آلیاژ مغناطیس دائم
- انکدر هایدن هاین ۱۳۸۷
- استفاده از فناوری Stabila برای ثبات عملکرد و عدم لرزش موتور
- تولید رباتیک با خطای نزدیک به صفر
- ۵ سال گارانتی سراسری
- پیشتیبانی آسانسور ۱۱۰

GentleRise

موتور دیسکی ۱۶ – ۲۱ نفر –فلکه ۴۰ سیستم ۲:۱

BEHFARAZ
Hydraulic & gearless elevators equipment

مدل موتور Model	ظرفیت (کیلوگرم) Capacity (kg)	سرعت آسانسور Elevator Speed (m/s)	توان Rated Output (kW)	جریان Rated Current (A)	دور در دقیقه Rated Speed (rpm)	فرکانس Frequency (Hz)	قطر فلکه Sheave Diameter (mm)	تعداد قطب Poles (2p)	گشتاور Torque (N.m)	گام * سایز شیار * تعداد شیار Ropes	نوع شیار Groove	زاویه برش Cut Angle	زاویه شیار Groove Angle
WTD1-B1250-100D-B	1250	1.0	8.4	20	95	23.8	400	30	837	6×Φ10×16	Undercut V	β=105°	γ=40°
WTD1-B1250-160D-B	1250	1.6	13.4	32	153	38.3	400	30	837	6×Φ10×16	Undercut V	β=105°	γ=40°
WTD1-B1600-100D-B	1600	1.0	10.7	25	95	23.8	400	30	1071	8×Φ10×16	Undercut V	β=105°	γ=40°
WTD1-B1600-160D-B	1600	1.6	17.1	38	153	38.3	400	30	1071	8×Φ10×16	Undercut V	β=105°	γ=40°

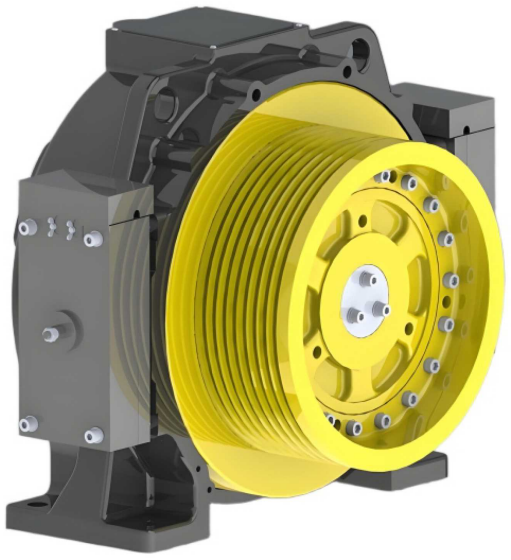

WTD1-B1250-1600(φ400) SERIES

Roping 2:1

- Rated Voltage: AC380V
- Brake Voltage: DC220V
- Duty : S5 - 40%
- Max. Static Load: 5500kg
- Wrap: Single
- Insulation: F
- Protection: Ip41
- Traveling Height: ≤120 m

KC Certification from South Korea

ISO45001 — IATF16949T

ISO14001 — ISO9001

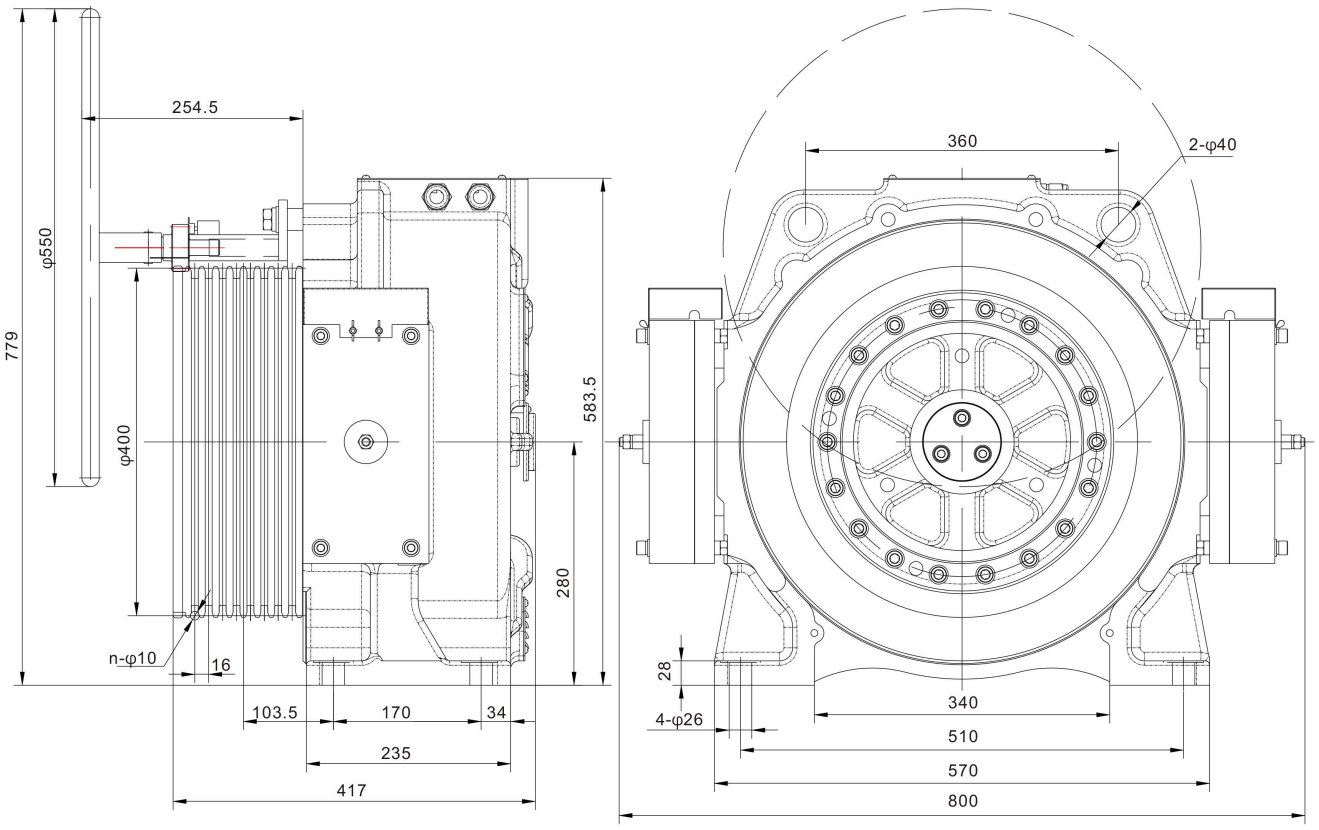

پکیج خدماتی

درخت سیم شیلددار ضد نویز

پکیج پیچ و مهره فولادی کلاس ۸

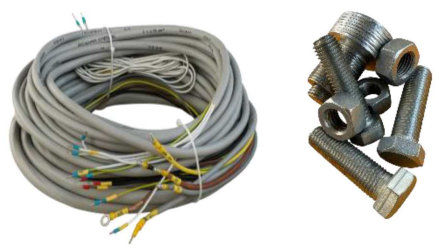

چرا جنتل رایز انتخاب بهینه است؟

- تولید توسط برنده جایزه تعالی نوآوری چین
- تولیدکننده موتور برای خودروسازهای بین‌المللی
- استفاده از برترین متریال‌ها و آلیاژ مغناطیس دائم
- انکدر هایدن هاین ۱۳۸۷
- استفاده از فناوری Stabila برای ثبات عملکرد و عدم لرزش موتور
- تولید رباتیک با خطای نزدیک به صفر
- ۵ سال گارانتی سراسری
- پیشتیبانی آسانسور ۱۱۰

GentleRise

موتور دیسکی ۲۶ نفر- فلکه ۴۸-سیستم ۲:۱

BEHFARAZ
Hydraulic & gearless elevators equipment

مدل موتور Model	ظرفیت (کیلوگرم) Capacity (kg)	سرعت آسانسور Elevator Speed (m/s)	توان Rated Output (kW)	جریان Rated Current (A)	دور در دقیقه Rated Speed (rpm)	فرکانس Frequency (Hz)	قطر فلکه Sheave Diameter (mm)	تعداد قطب Poles (2p)	گشتاور Torque (N.m)	گام * سایز شیار * تعداد شیار Ropes	نوع شیار Groove	زاویه برش Cut Angle	زاویه شیار Groove Angle
WTD1-B2500-100D-48	2500	1.0	15.9	38	80	26.7	480	40	1904	7×Φ12×18	Undercut V	β =105°	γ =40°
WTD1-B2500-160D-48	2500	1.6	25.4	59	127	42.3	480	40	1904	7×Φ12×18	Undercut V	β =105°	γ =40°

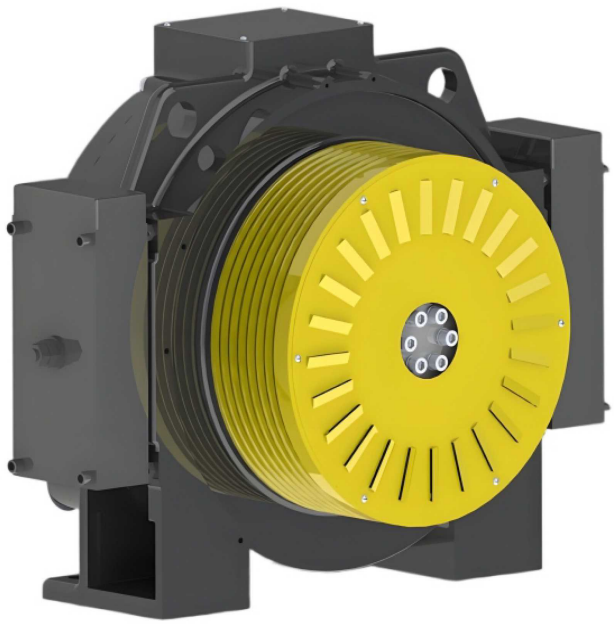

WTD1-B2500(ϕ 480) SERIES

Roping 2:1

- **Rated Voltage: AC380V**
- **Brake Voltage: DC220V**
- **Duty : S5 - 40%**
- **Max. Static Load: 5500kg**
- **Wrap: Single**
- **Insulation: F**
- **Protection: Ip41**
- **Traveling Height: ≤ 90 m**

KC Certification from South Korea

ISO45001 — **IATF16949T** — **ISO14001** — **ISO9001**

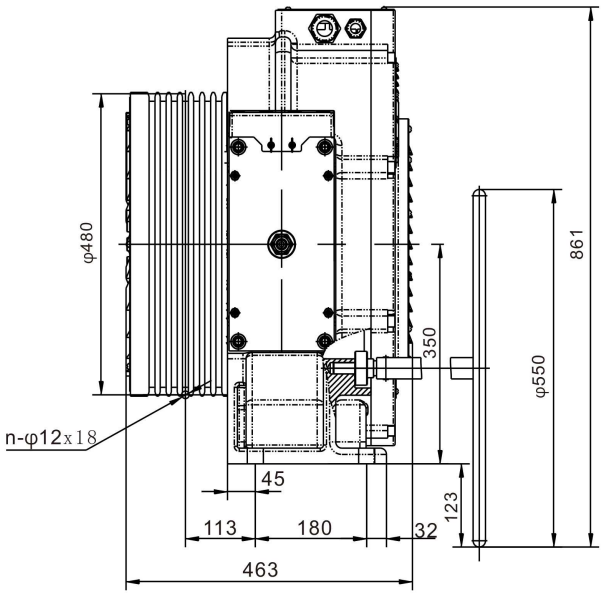

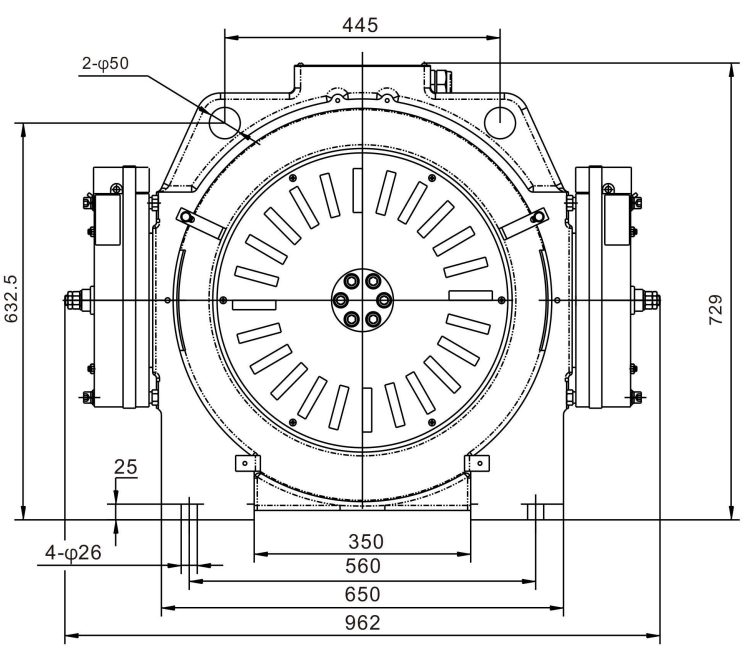

پکیج خدماتی

درخت سیم شیلددار ضد نویز

پکیج پیچ و مهره فولادی کلاس ۸

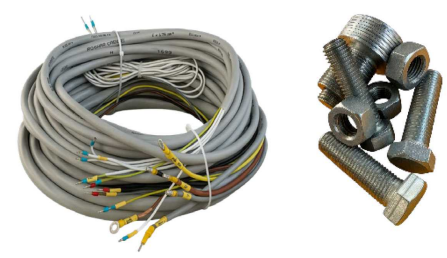

چرا جنتل رایز انتخاب بهینه است؟

- تولید توسط برنده جایزه تعالی نوآوری چین
- تولیدکننده موتور برای خودروسازهای بین‌المللی
- استفاده از برترین متریال‌ها و آلیاژ مغناطیس دائم
- انکدر هایدن هاین ۱۳۸۷
- استفاده از فناوری Stabila برای ثبات عملکرد و عدم لرزش موتور
- تولید رباتیک با خطای نزدیک به صفر
- ۵ سال گارانتی سراسری
- پیشتیبانی آسانسور ۱۱۰

GentleRise

موتور بشکه ای ۶ نفر –فلکه ۳۲ – سیستم ۲:۱

BEHFARAZ
Hydraulic & gearless elevators equipment

مدل موتور Model	ظرفیت (کیلوگرم) Capacity (kg)	سرعت آسانسور Elevator Speed (m/s)	توان Rated Output (kW)	جریان Rated Current (A)	دور در دقیقه Rated Speed (rpm)	فرکانس Frequency (Hz)	قطر فلکه Sheave Diameter (mm)	تعداد قطب Poles (2p)	گشتاور Torque (N.m)	گام * سایز شیار * تعداد شیار Ropes	نوع شیار Groove	زاویه برش Cut Angle	زاویه شیار Groove Angle
WTD2-P450-100D	450	1.0	3.0	8	119	19.9	320	20	240	4×Φ8×12	Undercut U	β =90°	γ =30°
WTD2-P450-160D	450	1.6	4.8	12	191	31.8	320	20	240	4×Φ8×12	Undercut U	β =90°	γ =30°

WTD2-P450(ϕ320) SERIES

Roping 2:1

- **Rated Voltage: AC380V**
- **Brake Voltage: DC220V**
- **Duty : S5 - 40%**
- **Max. Static Load: 2500kg**
- **Wrap: Single**
- **Insulation: F**
- **Protection: Ip41**
- **Traveling Height: ≤45 m**

KC Certification from South Korea

ISO45001 — **IATF16949T** — **ISO14001** — **ISO9001**

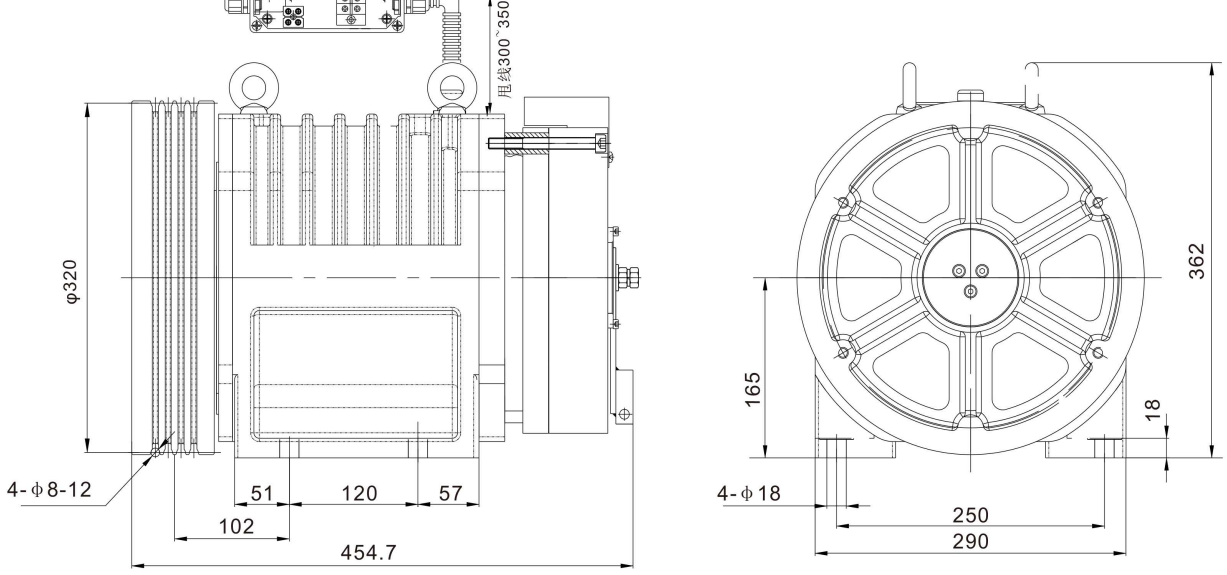

پکیج خدماتی

درخت سیم شیلددار ضد نویز

پکیج پیچ و مهره فولادی کلاس ۸

چرا جنتل رایز انتخاب بهینه است؟

- تولید توسط برنده جایزه تعالی نوآوری چین
- تولیدکننده موتور برای خودروسازهای بین‌المللی
- استفاده از برترین متریال‌ها و آلیاژ مغناطیس دائم
- انکدر هایدن هاین ۱۳۸۷
- استفاده از فناوری Stabila برای ثبات عملکرد و عدم لرزش موتور
- تولید رباتیک با خطای نزدیک به صفر
- ۵ سال گارانتی سراسری
- پیشتیبانی آسانسور ۱۱۰

GentleRise

موتور بشکه ای ۸ نفر- فلکه ۳۲-سیستم ۲:۱

BEHFARAZ
Hydraulic & gearless elevators equipment

مدل موتور Model	ظرفیت (کیلوگرم) Capacity (kg)	سرعت آسانسور Elevator Speed (m/s)	توان Rated Output (kW)	جریان Rated Current (A)	دور در دقیقه Rated Speed (rpm)	فرکانس Frequency (Hz)	قطر فلکه Sheave Diameter (mm)	تعداد قطب Poles (2p)	گشتاور Torque (N.m)	گام * سایز شیار * تعداد شیار Ropes	نوع شیار Groove	زاویه برش Cut Angle	زاویه شیار Groove Angle
WTD2-P630-100D	630	1.0	4.2	10	119	19.9	320	20	336	5×Φ8×12	Undercut U	β=90°	γ=30°
WTD2-P630-160D	630	1.6	6.7	16	191	31.8	320	20	336	5×Φ8×12	Undercut U	β=90°	γ=30°

WTD2-P630 (ϕ320) SERIES

Roping 2:1

- Rated Voltage: AC380V
- Brake Voltage: DC220V
- Duty ： S5 - 40%
- Max. Static Load: 2500kg
- Wrap: Single
- Insulation: F
- Protection: Ip41
- Traveling Height: ≤90 m

KC Certification from South Korea

ISO45001 — IATF16949T

ISO14001 — ISO9001

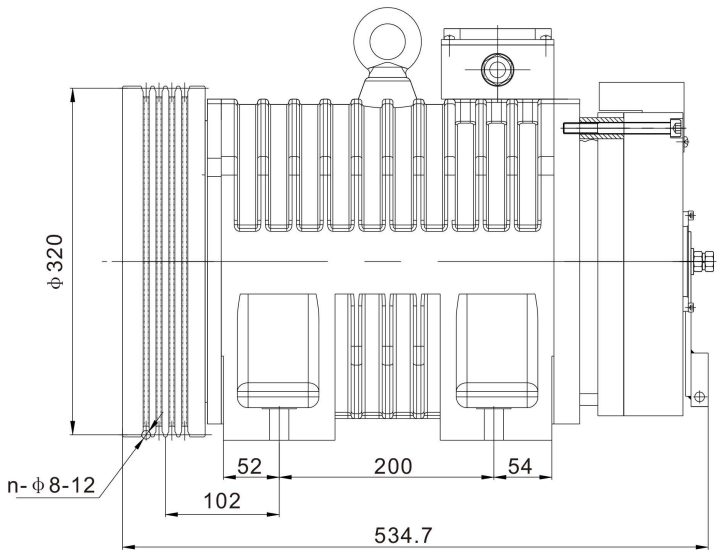

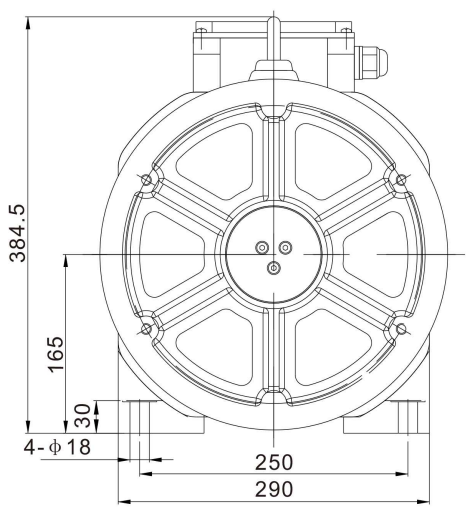

پکیج خدماتی

درخت سیم شیلددار ضد نویز

پکیج پیچ و مهره فولادی کلاس ۸

چرا جنتل رایز انتخاب بهینه است؟

- تولید توسط برنده جایزه تعالی نوآوری چین
- تولیدکننده موتور برای خودروسازهای بین‌المللی
- استفاده از برترین متریال‌ها و آلیاژ مغناطیس دائم
- انکدر هایدن هاین ۱۳۸۷
- استفاده از فناوری Stabila برای ثبات عملکرد و عدم لرزش موتور
- تولید رباتیک با خطای نزدیک به صفر
- ۵ سال گارانتی سراسری
- پیشتیبانی آسانسور ۱۱۰

GentleRise موتوربشکه ای ۱۰–۱۳ نفر–فلکه۳۲ – سیستم ۲:۱

BEHFARAZ
Hydraulic & gearless elevators equipment

Model	Capacity (kg)	Elevator Speed (m/s)	Rated Output (kW)	Rated Current (A)	Rated Speed (rpm)	Frequency (Hz)	Sheave Diameter (mm)	Poles (2p)	Torque (N.m)	Ropes	Groove	Cut Angle	Groove Angle
WTD2-P630-100D	800	1.0	5.4	12	119	19.9	320	20	430	6×Φ8×12	Undercut U	β=90°	γ=30°
WTD2-P800-160D	800	1.6	8.6	21	191	31.8	320	20	430	6×Φ8×12	Undercut U	β=90°	γ=30°
WTD2-P1000-100D	1000	1.0	6.7	15	119	19.9	320	20	540	6×Φ8×12	Undercut U	β=90°	γ=30°
WTD2-P1000-160D	1000	1.6	10.8	25	191	31.8	320	20	540	6×Φ8×12	Undercut U	β=90°	γ=30°

WTD2-P630 (ϕ320) SERIES

Roping 2:1

- **Rated Voltage: AC380V**
- **Brake Voltage: DC220V**
- **Weight: 280kg**
- **Duty ： S5 - 40%**
- **Max. Static Load: 3500kg**
- **Wrap: Single**
- **Insulation: F**
- **Protection: Ip41**
- **Traveling Height: ≤120 m**

KC Certification from South Korea

ISO45001 — **IATF16949T** — **ISO14001** — **ISO9001**

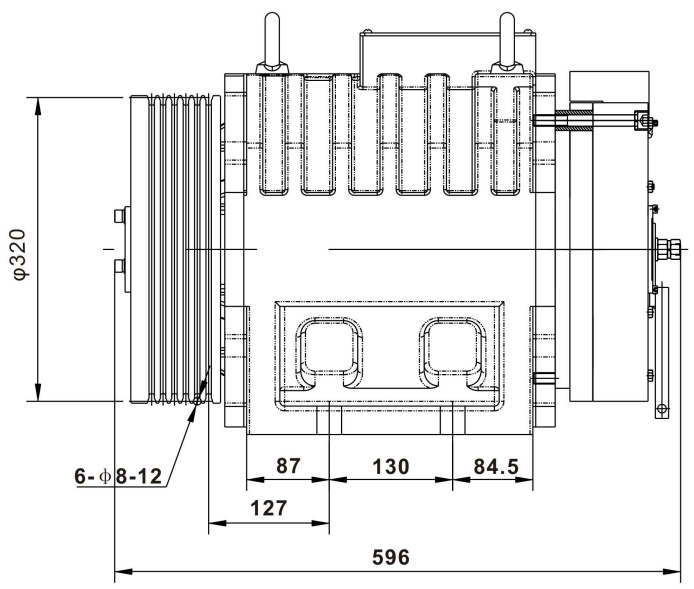

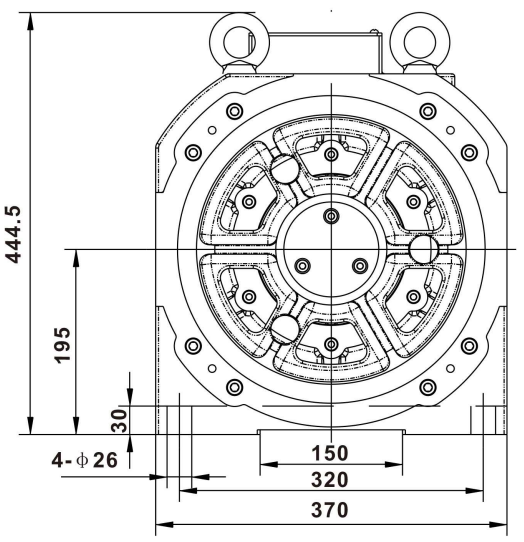

پکیج خدماتی

درخت سیم شیلددار ضد نویز

پکیج پیچ و مهره فولادی کلاس ۸

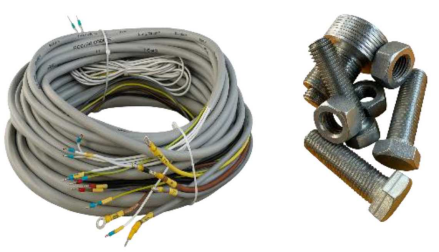

چرا جنتل رایز انتخاب بهینه است؟

- تولید توسط برنده جایزه تعالی نوآوری چین
- تولیدکننده موتور برای خودروسازهای بین‌المللی
- استفاده از برترین متریال‌ها و آلیاژ مغناطیس دائم
- انکدر هایدن هاین ۱۳۸۷
- استفاده از فناوری Stabila برای ثبات عملکرد و عدم لرزش موتور
- تولید رباتیک با خطای نزدیک به صفر
- ۵ سال گارانتی سراسری
- پیشتیبانی آسانسور ۱۱۰

GentleRise

موتور بشکه ای ۱۶ – ۲۱ نفر –فلکه ۳۲ – سیستم ۲:۱

BEHFARAZ
Hydraulic & gearless elevators equipment

مدل موتور Model	ظرفیت (کیلوگرم) Capacity (kg)	سرعت آسانسور Elevator Speed (m/s)	توان Rated Output (kW)	جریان Rated Current (A)	دور در دقیقه Rated Speed (rpm)	فرکانس Frequency (Hz)	قطر فلکه Sheave Diameter (mm)	تعداد قطب Poles (2p)	گشتاور Torque (N.m)	گام * سایز شیار * تعداد شیار Ropes	نوع شیار Groove	زاویه برش Cut Angle	زاویه شیار Groove Angle
WTD2-P1250-100D	1250	1.0	8.2	20	119	19.9	320	20	658	8×Φ8×12	Undercut U	β=90°	γ=30°
WTD2-P1250-160D	1250	1.6	13.2	31	191	31.8	320	20	658	8×Φ8×12	Undercut U	β=90°	γ=30°
WTD2-P1600-100D	1600	1.0	10.5	25	119	19.9	320	20	842	10×Φ8×12	Undercut U	β=90°	γ=30°
WTD2-P1600-160D	1600	1.6	16.8	43	191	31.8	320	20	842	10×Φ8×12	Undercut U	β=90°	γ=30°

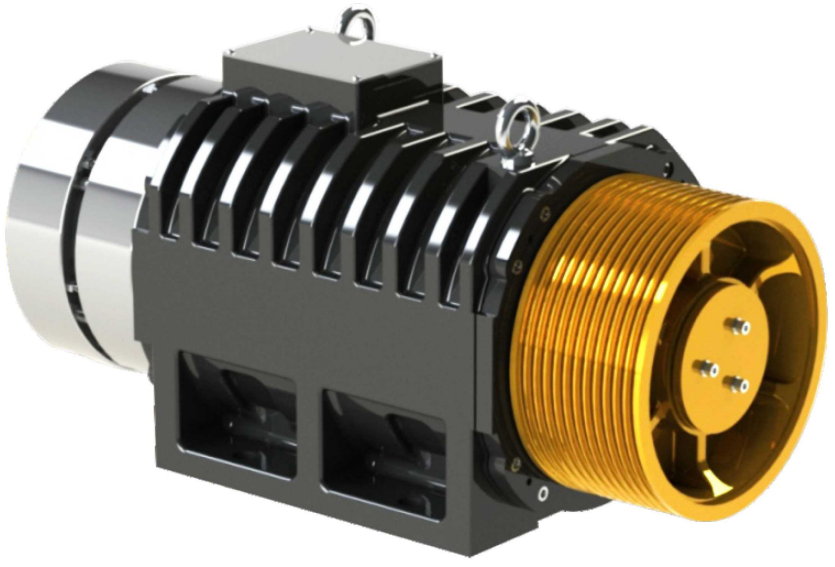

WTD2-P1250-1600 (ϕ320) SERIES

Roping 2:1

- Rated Voltage: AC380V
- Brake Voltage: DC220V
- Duty ： S5 - 40%
- Max. Static Load: 5000kg
- Wrap: Single
- Insulation: F
- Protection: Ip41
- Traveling Height: ≤90 m

KC Certification from South Korea

ISO45001 — IATF16949T — ISO14001 — ISO9001

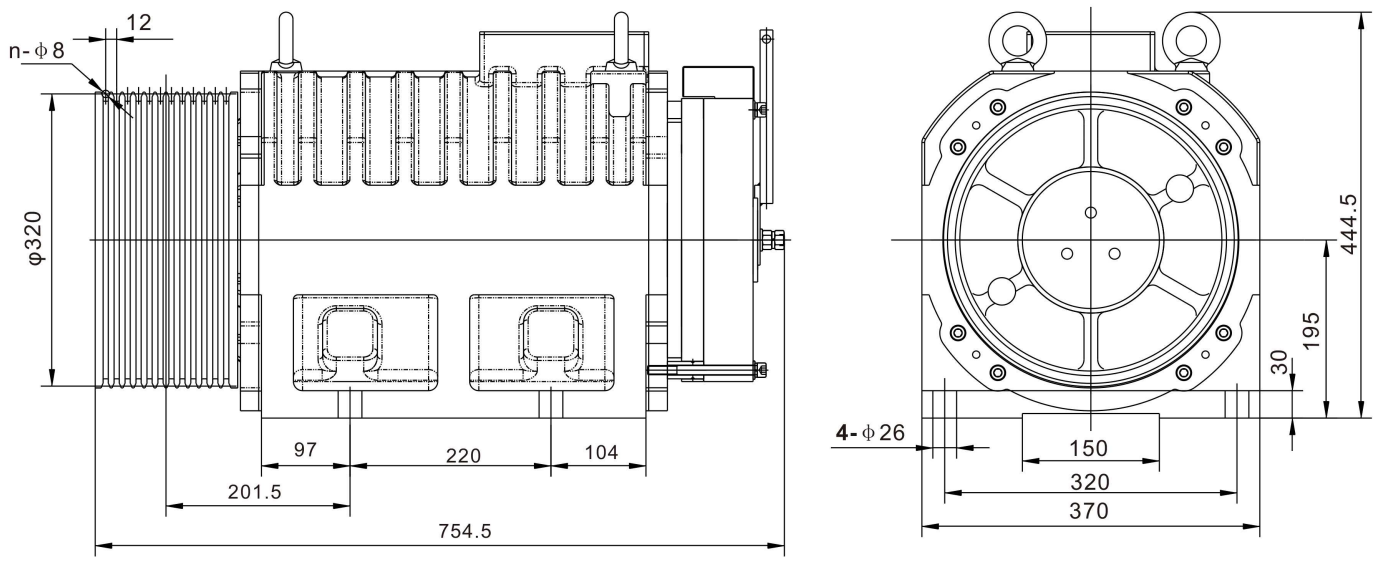

پکیج خدماتی

درخت سیم شیلددار ضد نویز

پکیج پیچ و مهره فولادی کلاس ۸

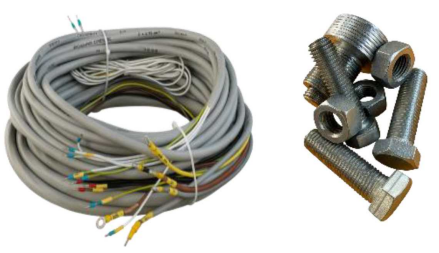

چرا جنتل رایز انتخاب بهینه است؟

- تولید توسط برنده جایزه تعالی نوآوری چین
- تولیدکننده موتور برای خودروسازهای بین‌المللی
- استفاده از برترین متریال‌ها و آلیاژ مغناطیس دائم
- انکدر هایدن هاین ۱۳۸۷
- استفاده از فناوری Stabila برای ثبات عملکرد و عدم لرزش موتور
- تولید رباتیک با خطای نزدیک به صفر
- ۵ سال گارانتی سراسری
- پیشتیبانی آسانسور ۱۱۰

GentleRise

موتور دیسکی ۶ نفر- فلکه۴۰-سیستم ۱:۱

BEHFARAZ
Hydraulic & gearless elevators equipment

مدل موتور Model	ظرفیت (کیلوگرم) Capacity (kg)	سرعت آسانسور Elevator Speed (m/s)	توان Rated Output (kW)	جریان Rated Current (A)	دور در دقیقه Rated Speed (rpm)	فرکانس Frequency (Hz)	قطر فلکه Sheave Diameter (mm)	تعداد قطب Poles (2p)	گشتاور Torque (N.m)	گام * سایز شیار * تعداد شیار Ropes	نوع شیار Groove	زاویه برش Cut Angle	زاویه شیار Groove Angle
WTD1-B1000-100D	450	1.0	3.0	7	48	11.9	400	30	592	6×Φ10×16	Undercut V	β=105°	γ=40°

WTD1-B1000 (ϕ400) SERIES

Roping 1:1

- **Rated Voltage: AC380V**
- **Brake Voltage: DC220V**
- **Weight: 270Kg**
- **Duty ： S5 - 40%**
- **Max. Static Load: 3500kg**
- **Wrap: Single**
- **Insulation: F**
- **Protection: Ip41**
- **Traveling Height: ≤90 m**

KC Certification from South Korea

ISO45001 — **IATF16949T** — **ISO14001** — **ISO9001**

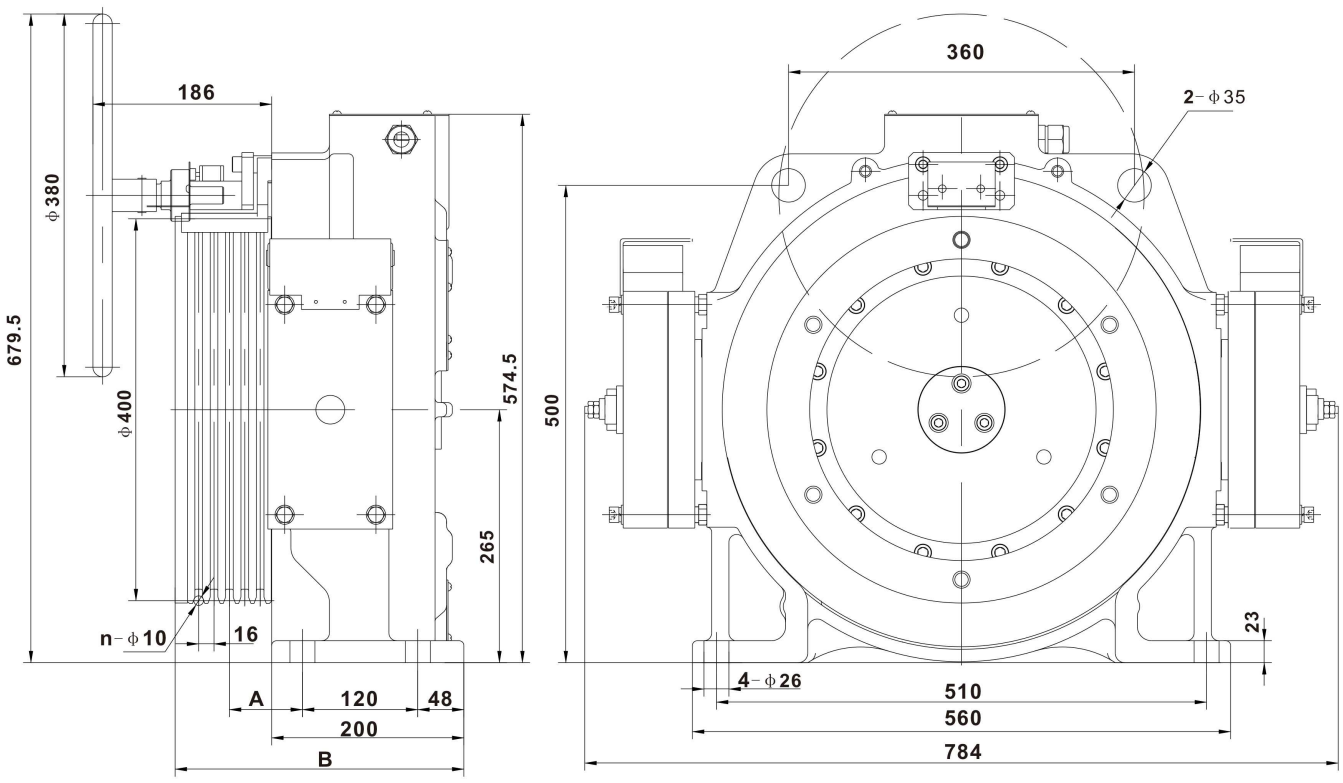

when n=4 or 5,A=76,B=300.5, when n=6,A=84, B=316.5

پکیج خدماتی

درخت سیم شیلددار ضد نویز

پکیج پیچ و مهره فولادی کلاس ۸

چرا جنتل رایز انتخاب بهینه است؟

- تولید توسط برنده جایزه تعالی نوآوری چین
- تولیدکننده موتور برای خودروسازهای بین‌المللی
- استفاده از برترین متریال‌ها و آلیاژ مغناطیس دائم
- انکدر هایدن هاین ۱۳۸۷
- استفاده از فناوری Stabila برای ثبات عملکرد و عدم لرزش موتور
- تولید رباتیک با خطای نزدیک به صفر
- ۵ سال گارانتی سراسری
- پیشتیبانی آسانسور ۱۱۰

GentleRise

موتور دیسکی ۸ نفر-فلکه ۴۰ - سیستم ۱:۱

BEHFARAZ
Hydraulic & gearless elevators equipment

مدل موتور Model	ظرفیت (کیلوگرم) Capacity (kg)	سرعت آسانسور Elevator Speed (m/s)	توان Rated Output (kW)	جریان Rated Current (A)	دور در دقیقه Rated Speed (rpm)	فرکانس Frequency (Hz)	قطر فلکه Sheave Diameter (mm)	تعداد قطب Poles (2p)	گشتاور Torque (N.m)	گام * سایز شیار * تعداد شیار Ropes	نوع شیار Groove	زاویه برش Cut Angle	زاویه شیار Groove Angle
WTD1-B-630	630	1.0	4.4	20	48	11.9	400	30	866	6*10*16	undercut V	β=105	γ=40

WTD1-B-630 (ϕ400) SERIES

Roping 1:1

- **Rated Voltage: AC380V**
- **Brake Voltage: DC220V**
- **Duty : S5 - 40%**
- **Max. Static Load: 5500kg**
- **Wrap: Single**
- **Insulation: F**
- **Protection: Ip41**
- **Traveling Height: ≤90 m**

KC Certification from South Korea

ISO45001 — **IATF16949T** — **ISO14001** — **ISO9001**

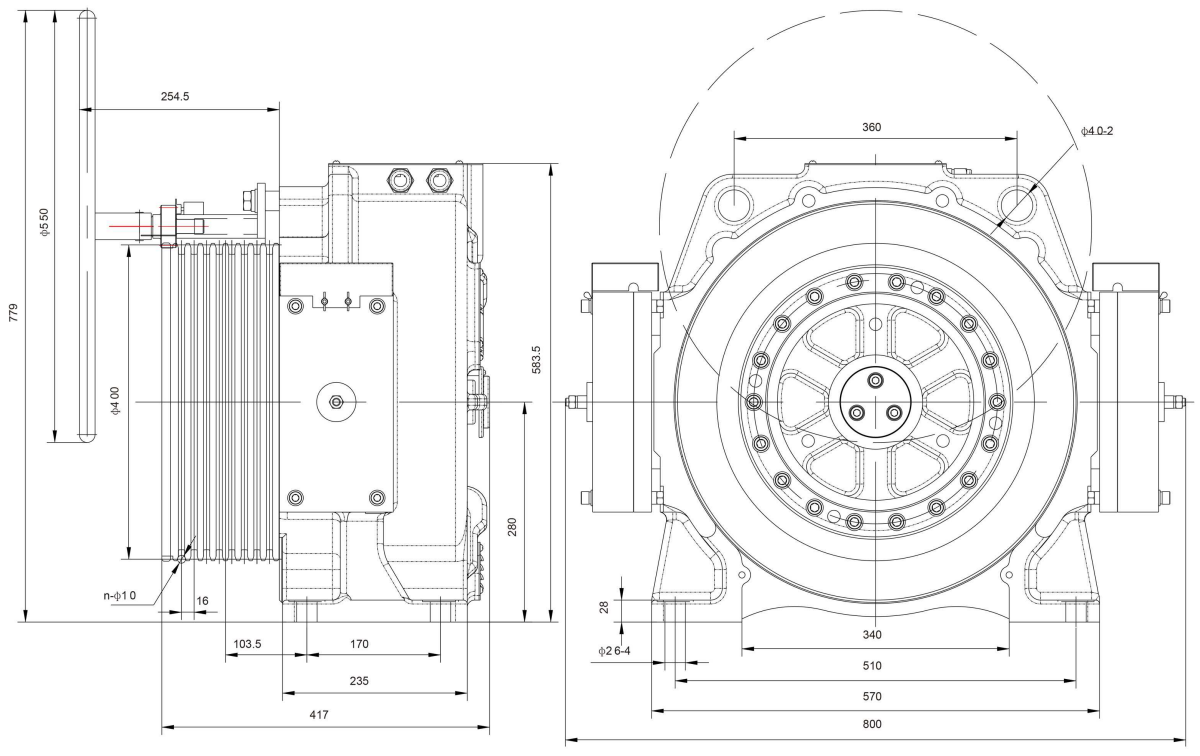

پکیج خدماتی

درخت سیم شیلددار ضد نویز

پکیج پیچ و مهره فولادی کلاس ۸

چرا جنتل رایز انتخاب بهینه است؟

- تولید توسط برنده جایزه تعالی نوآوری چین
- تولیدکننده موتور برای خودروسازهای بین‌المللی
- استفاده از برترین متریال‌ها و آلیاژ مغناطیس دائم
- انکدر هایدن هاین ۱۳۸۷
- استفاده از فناوری Stabila برای ثبات عملکرد و عدم لرزش موتور
- تولید رباتیک با خطای نزدیک به صفر
- ۵ سال گارانتی سراسری
- پیشتیبانی آسانسور ۱۱۰

Certificate No.
SCMB.0152 rev.1

Date of Issue
03/02/2023

Valid From
03/02/2023

The Certificate is valid until
25/06/2028

EU TYPE-EXAMINATION CERTIFICATE FOR SAFETY COMPONENTS ACCORDING TO EUROPEAN LIFT DIRECTIVE 2014/33/EU ANNEX IV (MODULE B)

Applicant/Certificate Holder (Name & Address):	HEPU POWER CO., LTD. NO.26-1 Yingbin Avenue, Zhaoqing National Hi-Tech Industrial Development Zone, Zhaoqing, Guangdong, China
Manufacturer (Name & Address):	Same as applicant
Date of Submission:	10/01/2023
Test Laboratory (Name & Address):	Shenzhen Institute of Quality & Safety Inspection and Research / No.1032, Honggang Road, Luohu District, Shenzhen, Guangdong, China
Date and Number of test report:	26/11/2021 No.: 2021AF1243 26/11/2021 No. :2021AF1244 20/09/2022 No.: 2022AF0968
Approved Type of ascending car overspeed protection means:	Braking Device as part of the Lift Ascending Car Overspeed Protection Means
Application of ascending car overspeed protection means:	Acting on the traction sheave shaft, as part of the protection device against overspeed of the car moving in upwards direction
Model:	GZD-2(2×750Nm), GZD-2(2×1300Nm), GZD-2(2×2400Nm)
Drawing Number *(attached to this certificate):*	GZD-2(2x750), GZD-2(2x1300), 5HP270199
Standard(s):	EN81-50:2020
Reference Standard(s)	EN81-20:2020

EUROCERT SA, aforementioned notified body with identification number 1128,
ascertains and certifies that above safety component satisfy the safety requirements of the European Directive 2014/33/EU.
The manufacturer is authorized to provide the safety component described above with the CE Mark as displayed below:

CE 1128

Preconditions:
It is required that the above safety equipment must always come with a declaration of conformity and the relevant instructions of use.
Please check the validity of the certificate from our website using the password **HtTEEgt4**

Certificate History:

Revision No.	Description	Issue Date
0	Initial Certificate	26/06/2018
1	Updated the type test report, new range of Annex A and Annex B	03/02/2023

On behalf of EUROCERT S.A.,
GEORGE N. SIFONIOS
Director of International Markets

INSPECTOR
CHAD WANG

The data of this certificate were gathered with every possible thoroughness.
This certificate reflects the findings of the time and place of the audit.
Reproduction of this document is strictly forbidden.

EUROCERT S.A. 89 Chlois & Lykovriseos str., 144 52, Metamorphosi – Greece
T +30 210 62.52.495, +30 210 62.53.927, **F** +30 210 62.03.018, **M** info@eurocert.gr

ANNEX A

CERTIFICATE No.: SCMB.0152 rev.1

TECHNICAL SPECIFICATIONS

Product Name/ Product Type / Model	:	*Braking Device as part of the Protection Device against Unintended Car Movement / GZD-2(2×750Nm), GZD-2(2×1300Nm), GZD-2(2×2400Nm)*		
Type of Application	:	*Braking Device acting on the traction sheave shaft*		
Model	:	*GZD-2(2×750Nm)*	*GZD-2(2×1300Nm)*	*GZD-2(2×2400Nm)*
Permissible system total mass (empty car mass + counterweight e.t.c.)	:	*1028 - 2965(Kg)*	*1920-5400(Kg)*	*1820 - 11250(kg)*
Permissible car mass	:	*450 –1220 (Kg)*	*800-2300(kg)*	*750 –5000 (kg)*
Permissible rated load with suspension ratio of 2:1	:	*320 - 1050 (Kg)*	*800-1600 (kg)*	*800 - 2500 (kg)*
Range of balance coefficient	:	*0.40 – 0.50*	*0.40 – 0.50*	*0.40 – 0.50*
Tripping speed range of overspeed governor	:	*0.58 –2.63(m/sec)*	*0.58 –3.23(m/sec)*	*0.58 –5.06(m/sec)*
Rated speed range of elevator	:	*0.50–2.00(m/sec)*	*0.50–2.50(m/sec)*	*0.50–4.0(m/sec)*
Every Safety Component must be labeled with the following information	:		*Manufacturer's Name Safety Components Type Batch or Serial Number*	

Conditions:

1) Since the brake device represents only a part of the protection device against overspeed for the car moving in upwards direction an overspeed governor as per EN 81-20, paragraph 5.6.2.2.1 must be used to monitor the upward speed as well as the downwards speed and the brake device must be triggered (engaged) via the overspeed governor's electric safety device.

2) The mechanical movement of each brake circuit is to be monitored separately and directly. If a brake circuit fails to engage (close) while the lift machine is at standstill, next movement of the lift must be prevented.

3) In cases where the lift machine moves despite the brake being engaged (closed), the lift machine must at the latest be stopped and the next movement of the lift must be prevented.

EUROPEAN INSPECTION AND CERTIFICATION COMPANY S.A. EURO CERT N.B. 1128

EURO CERT

ANNEX B

CERTIFICATE No.: SCMB.0152 rev.1

DESIGN DRAWINGS

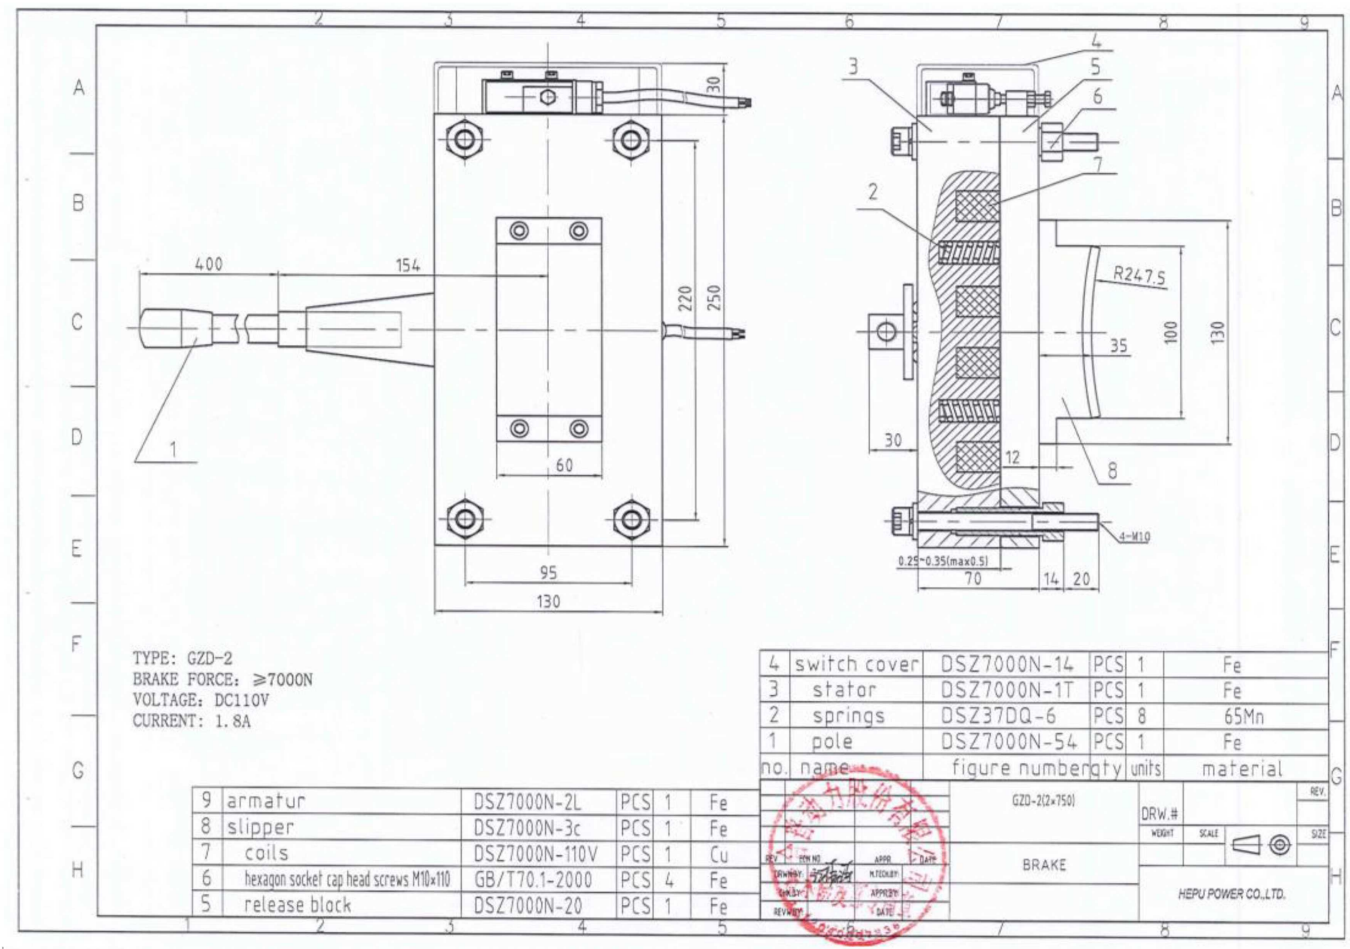

TYPE: GZD-2
BRAKE FORCE: ≥7000N
VOLTAGE: DC110V
CURRENT: 1.8A

no.	name	figure number	qty	units	material
4	switch cover	DSZ7000N-14	PCS	1	Fe
3	stator	DSZ7000N-1T	PCS	1	Fe
2	springs	DSZ37DQ-6	PCS	8	65Mn
1	pole	DSZ7000N-54	PCS	1	Fe
9	armatur	DSZ7000N-2L	PCS	1	Fe
8	slipper	DSZ7000N-3c	PCS	1	Fe
7	coils	DSZ7000N-110V	PCS	1	Cu
6	hexagon socket cap head screws M10×110	GB/T70.1-2000	PCS	4	Fe
5	release block	DSZ7000N-20	PCS	1	Fe

GZD-2(2×750)
BRAKE
DRW.#
HEPU POWER CO.,LTD.

EUROPEAN INSPECTION AND CERTIFICATION COMPANY S.A.
EURO CERT
N.B. 1128

EURO CERT

ANNEX B

CERTIFICATE No.: SCMB.0152 rev.1

DESIGN DRAWINGS

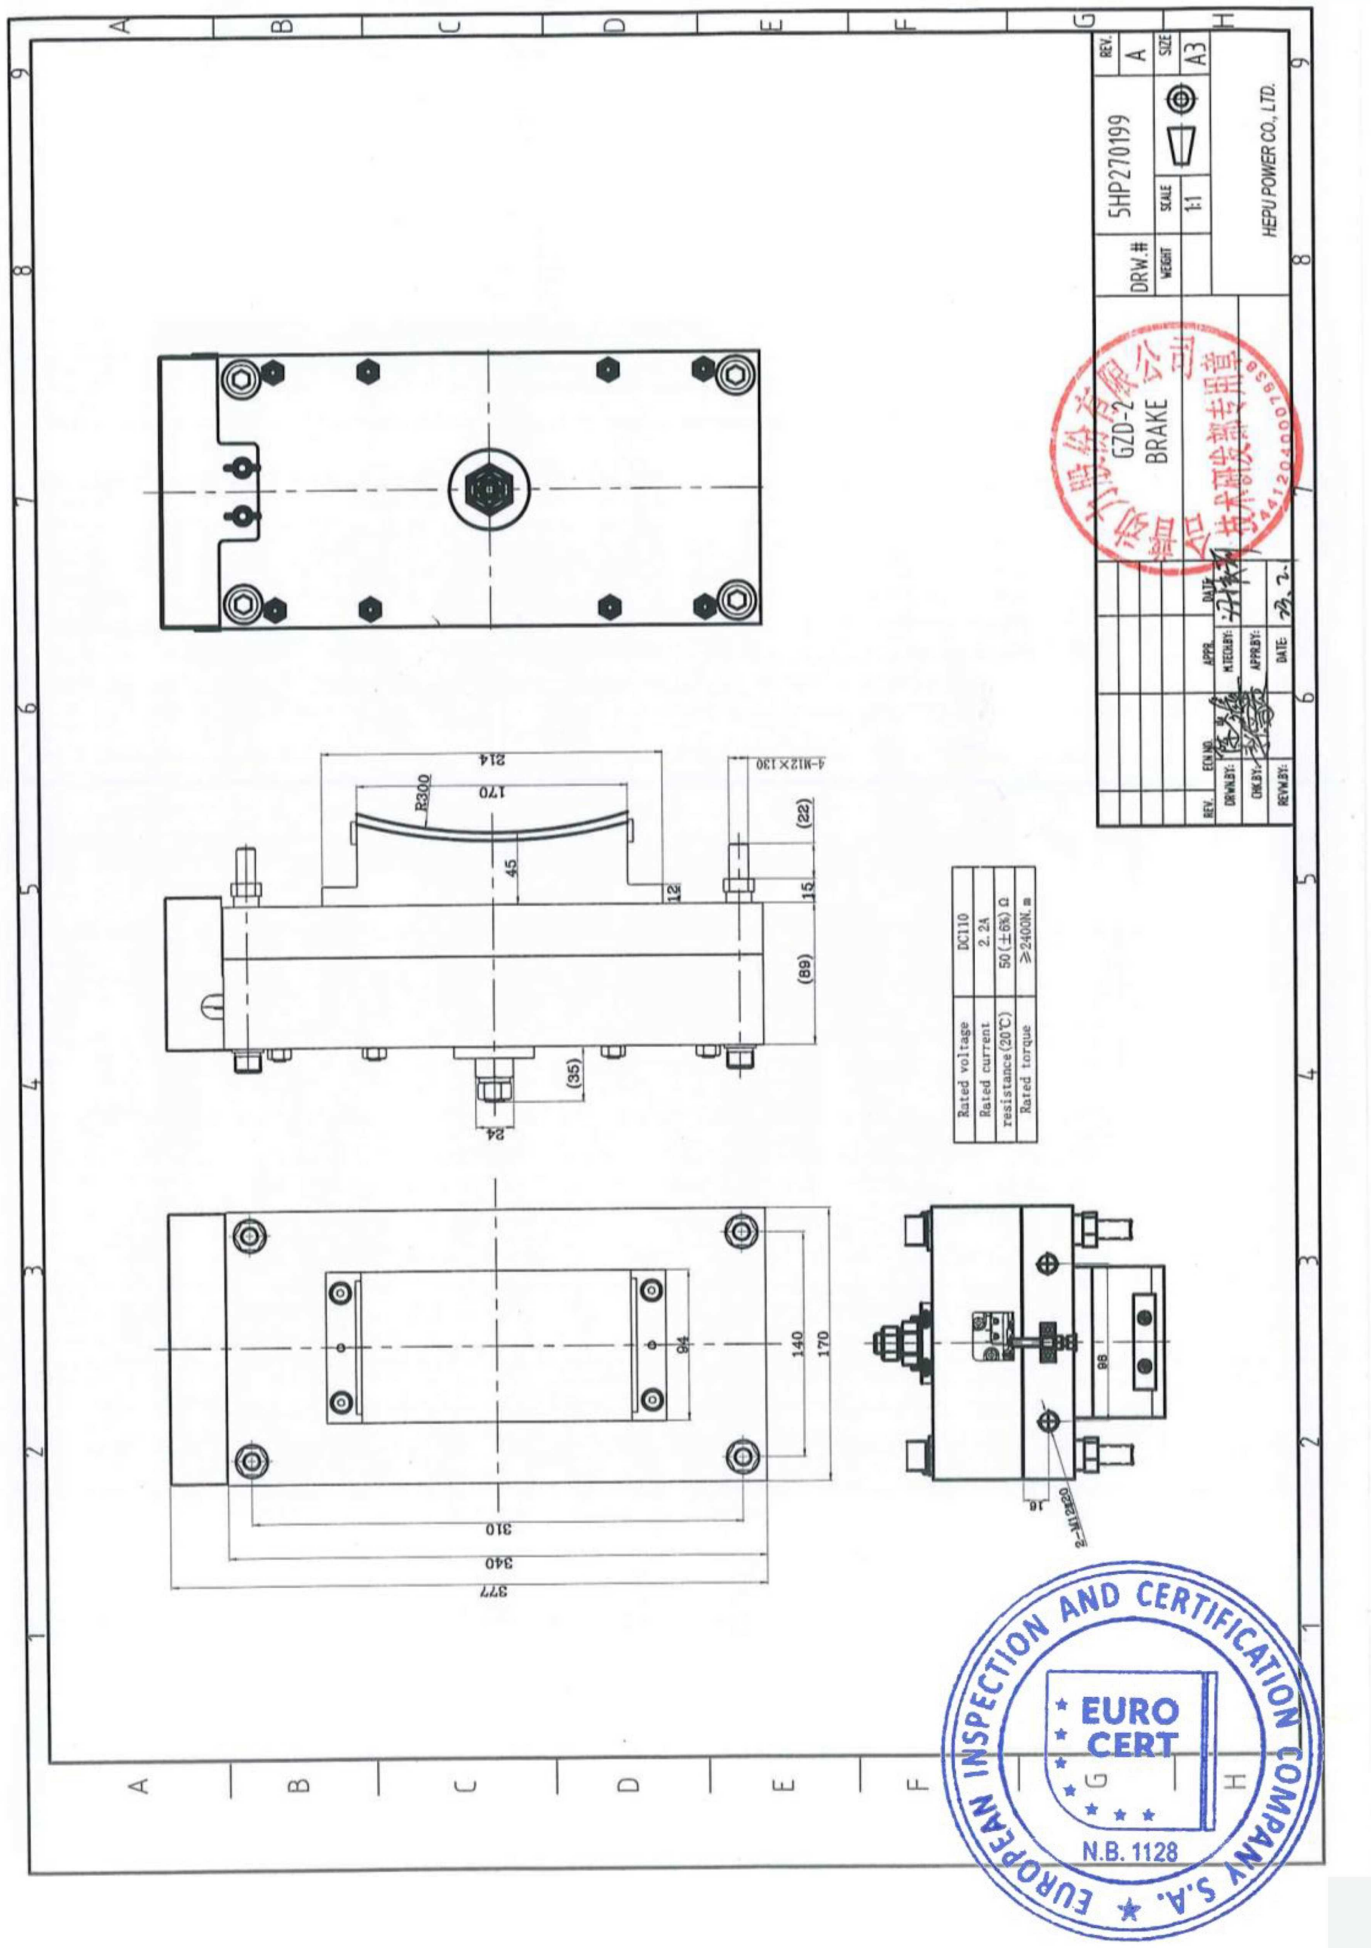

EUROPEAN INSPECTION AND CERTIFICATION COMPANY S.A.
EURO CERT
N.B. 1128

Certificate No.
SCMB.0152 rev.2

Date of Issue
28/03/2024

Valid From
28/03/2024

The Certificate is valid until
25/06/2028

EU TYPE-EXAMINATION CERTIFICATE FOR SAFETY COMPONENTS ACCORDING TO EUROPEAN LIFT DIRECTIVE 2014/33/EU ANNEX IV (MODULE B)

Applicant/Certificate Holder (Name & Address):	HEPU POWER CO., LTD. NO.26-1 Yingbin Avenue, Zhaoqing National Hi-Tech Industrial Development Zone, Zhaoqing, Guangdong, China
Manufacturer (Name & Address):	Same as applicant
Date of Submission:	14/03/2024
Test Laboratory (Name & Address):	Shenzhen Institute of Quality & Safety Inspection and Research No.1032, Honggang Road, Luohu District, Shenzhen, Guangdong, China
Date and Number of test report:	11/12/2023 No.: 2023AF1193 11/12/2023 No. :2023AF1192 20/09/2022 No.: 2022AF0968
Approved Type of ascending car overspeed protection means:	Braking Device as part of the Lift Ascending Car Overspeed Protection Means
Application of ascending car overspeed protection means:	Acting on the traction sheave, as part of the protection device against overspeed of the car moving in upwards direction
Model:	GZD-2(2×850Nm), GZD-2(2×1400Nm), GZD-2(2×2400Nm)
Drawing Number *(attached to this certificate)*:	5HP270166, 5HP270088, 5HP270199
Standard(s):	EN81-50:2020
Reference Standard(s)	EN81-20:2020

EUROCERT SA, aforementioned notified body with identification number 1128,
ascertains and certifies that above safety component satisfy the safety requirements of the European Directive 2014/33/EU.
The manufacturer is authorized to provide the safety component described above with the CE Mark as displayed below:

CE 1128

Preconditions:
It is required that the above safety equipment must always come with a declaration of conformity and the relevant instructions of use.
Please check the validity of the certificate from our website using the password **bK8gC5cP**

Certificate History:

Revision No.	Description	Issue Date
0	Initial Certificate	26/06/2018
1	Updated the type test report, new range of Annex A and Annex B	03/02/2023
2	Updated the type test report, new brake force in Annex A and Annex B	28/03/2024

On behalf of EUROCERT S.A.,
GEORGE SIFONIS
Director of International Markets

INSPECTOR
CHAD WANG

The data of this certificate were gathered with every possible thoroughness.
This certificate reflects the findings of the time and place of the audit.
Reproduction of this document is strictly forbidden.

EUROCERT S.A. 89 Chlois & Lykovriseos str., 144 52, Metamorphosi – Greece
T +30 210 62.52.495, +30 210 62.53.927, **F** +30 210 62.03.018, **M** info@eurocert.gr

ANNEX A

CERTIFICATE No.: SCMB.0152 rev.2

TECHNICAL SPECIFICATIONS

Product Name/ Product Type / Model	:	*Braking Device as part of the Protection Device against Unintended Car Movement / GZD-2(2×850Nm), GZD-2(2×1400Nm), GZD-2(2×2400Nm)*		
Type of Application	:	*Braking Device acting on the traction sheave*		
Model	:	*GZD-2(2×850Nm)*	*GZD-2(2×1400Nm)*	*GZD-2(2×2400Nm)*
Permissible system total mass (empty car mass + counterweight e.t.c.)	:	*1028 - 2965(Kg)*	*1920-5400(Kg)*	*1820 - 11250(kg)*
Permissible car mass	:	*450 –1220 (Kg)*	*800-2300(kg)*	*750 –5000 (kg)*
Permissible rated load with suspension ratio of 2:1	:	*320 - 1050 (Kg)*	*800-1600 (kg)*	*800 - 2500 (kg)*
Range of balance coefficient	:	*0.40 – 0.50*	*0.40 – 0.50*	*0.40 – 0.50*
Tripping speed range of overspeed governor	:	*0.58 –2.63(m/sec)*	*0.58 –3.23(m/sec)*	*0.58 –5.06(m/sec)*
Rated speed range of elevator	:	*0.50–2.00(m/sec)*	*0.50–2.50(m/sec)*	*0.50–4.0(m/sec)*
Every Safety Component must be labeled with the following information	:		*Manufacturer's Name Safety Components Type Batch or Serial Number*	

Note:

The suspension ratio of the sample during the type test is 2:1. When used for other suspension ratios, the applicable system mass, rated load and rated speed can be converted according to the actual suspension ratio according to the following formula:

(1) System quality application range = type test system quality range × actual suspension ratio ÷ suspension ratio of type test;

(2) Application range of rated load = rated load range of type test × actual suspension ratio ÷ suspension ratio of type test;

(3) Application range of rated speed = rated speed range of type test ÷ actual suspension ratio × type test suspension ratio.

Conditions:

1) Since the brake device represents only a part of the protection device against overspeed for the car moving in upwards direction an overspeed governor as per EN 81-20, paragraph 5.6.2.2.1 must be used to monitor the upward speed as well as the downwards speed and the brake device must be triggered (engaged) via the overspeed governor's electric safety device.

2) The mechanical movement of each brake circuit is to be monitored separately and directly. If a brake circuit fails to engage (close) while the lift machine is at standstill, next movement of the lift must be prevented.

3) In cases where the lift machine moves despite the brake being engaged (closed), the lift machine must at the latest be stopped and the next movement of the lift must be prevented.

EUROPEAN INSPECTION AND CERTIFICATION COMPANY S.A.
EURO CERT
N.B. 1128

ANNEX B

CERTIFICATE No.: SCMB.0152 rev.2

GZD-2(2×850Nm) DESIGN DRAWINGS

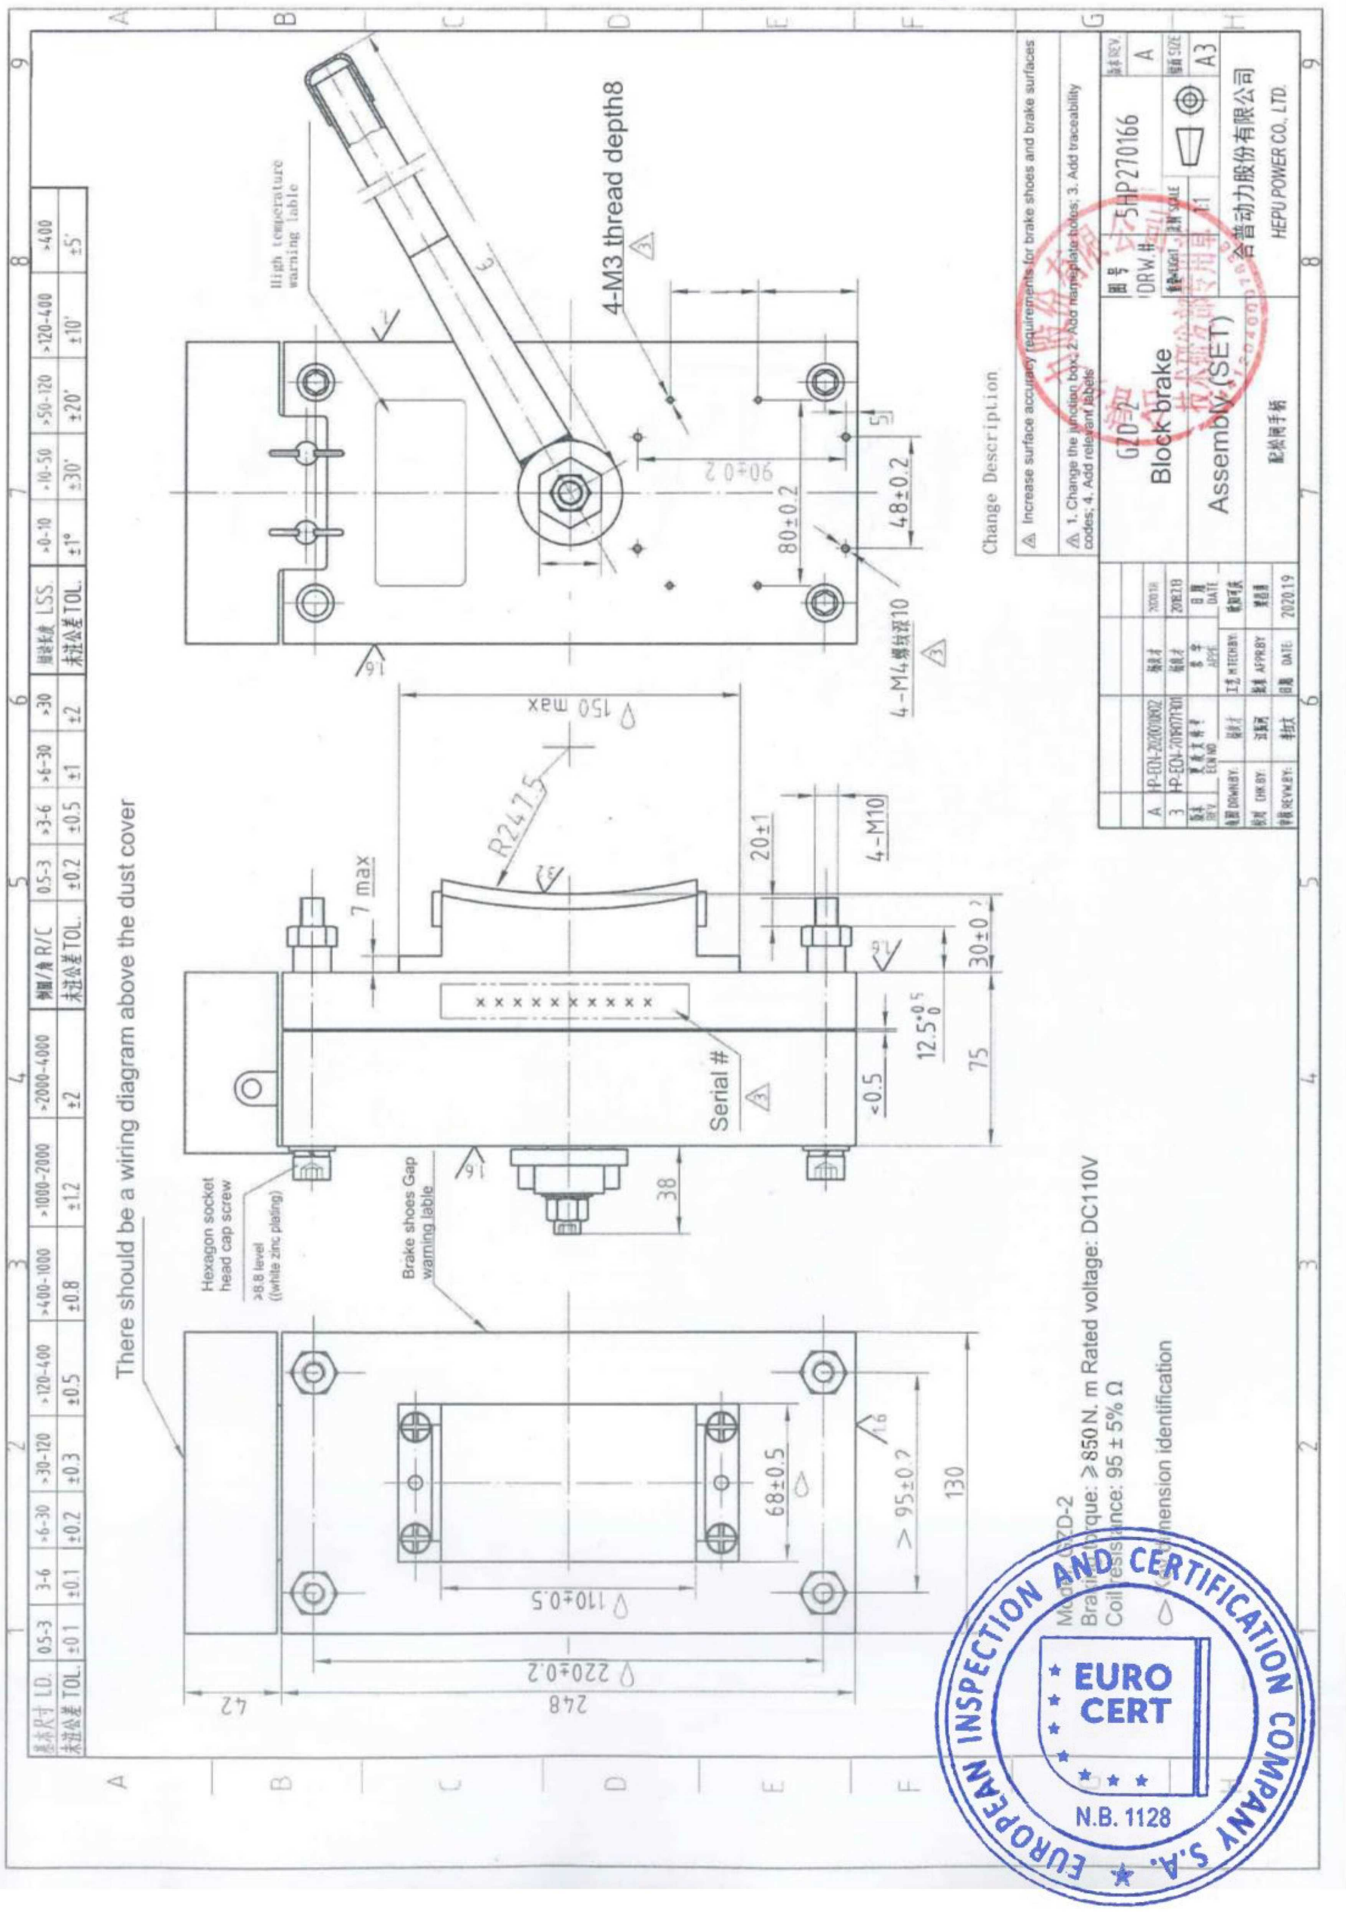

ANNEX B

CERTIFICATE No.: SCMB.0152 rev.2

GZD-2(2×1400Nm) DESIGN DRAWINGS

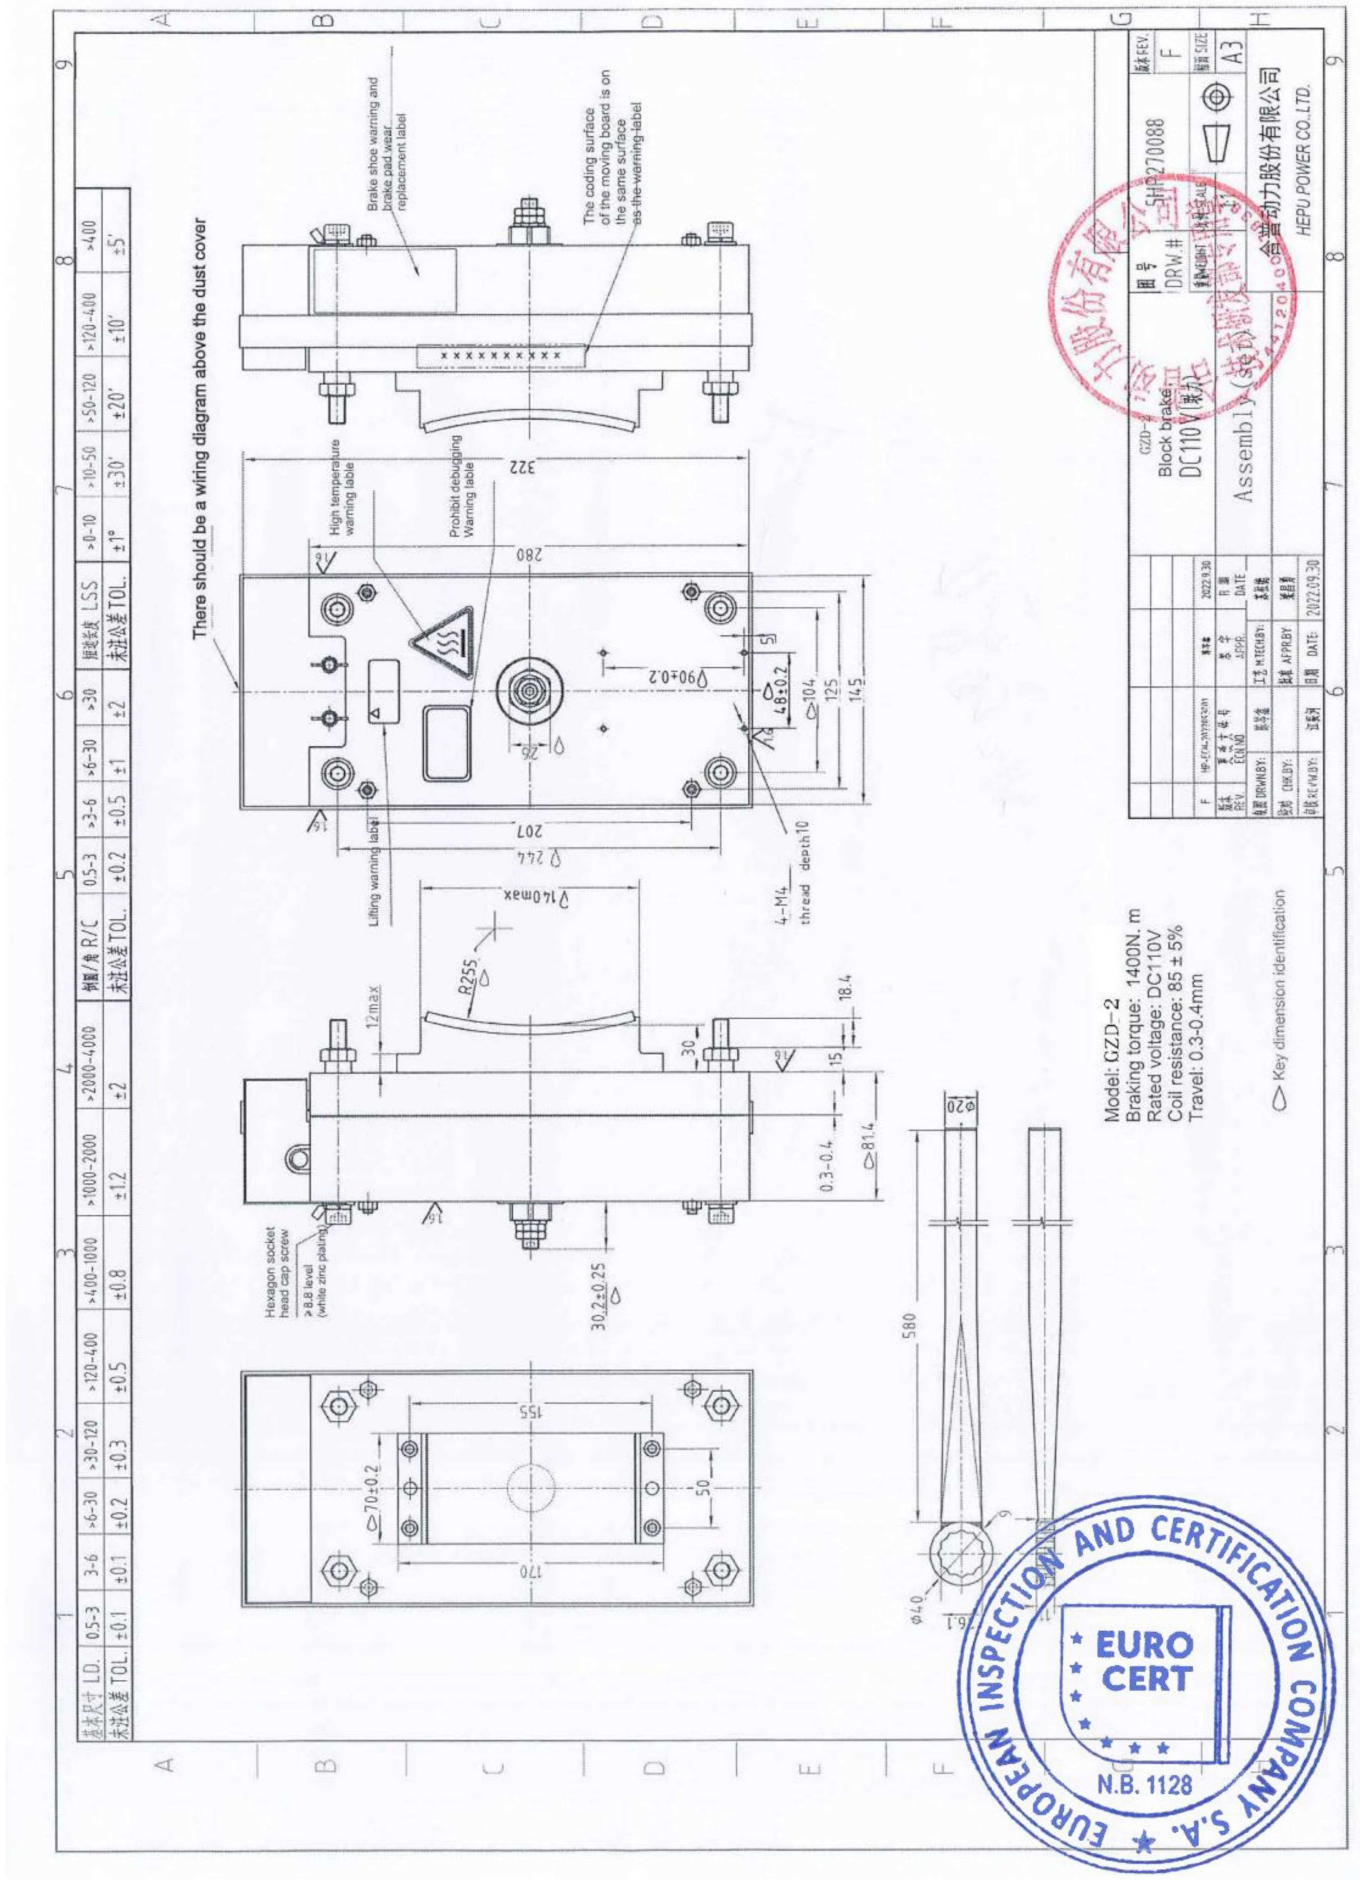

EURO CERT

ANNEX B

CERTIFICATE No.: SCMB.0152 rev.2

GZD-2(2×2400Nm) DESIGN DRAWINGS

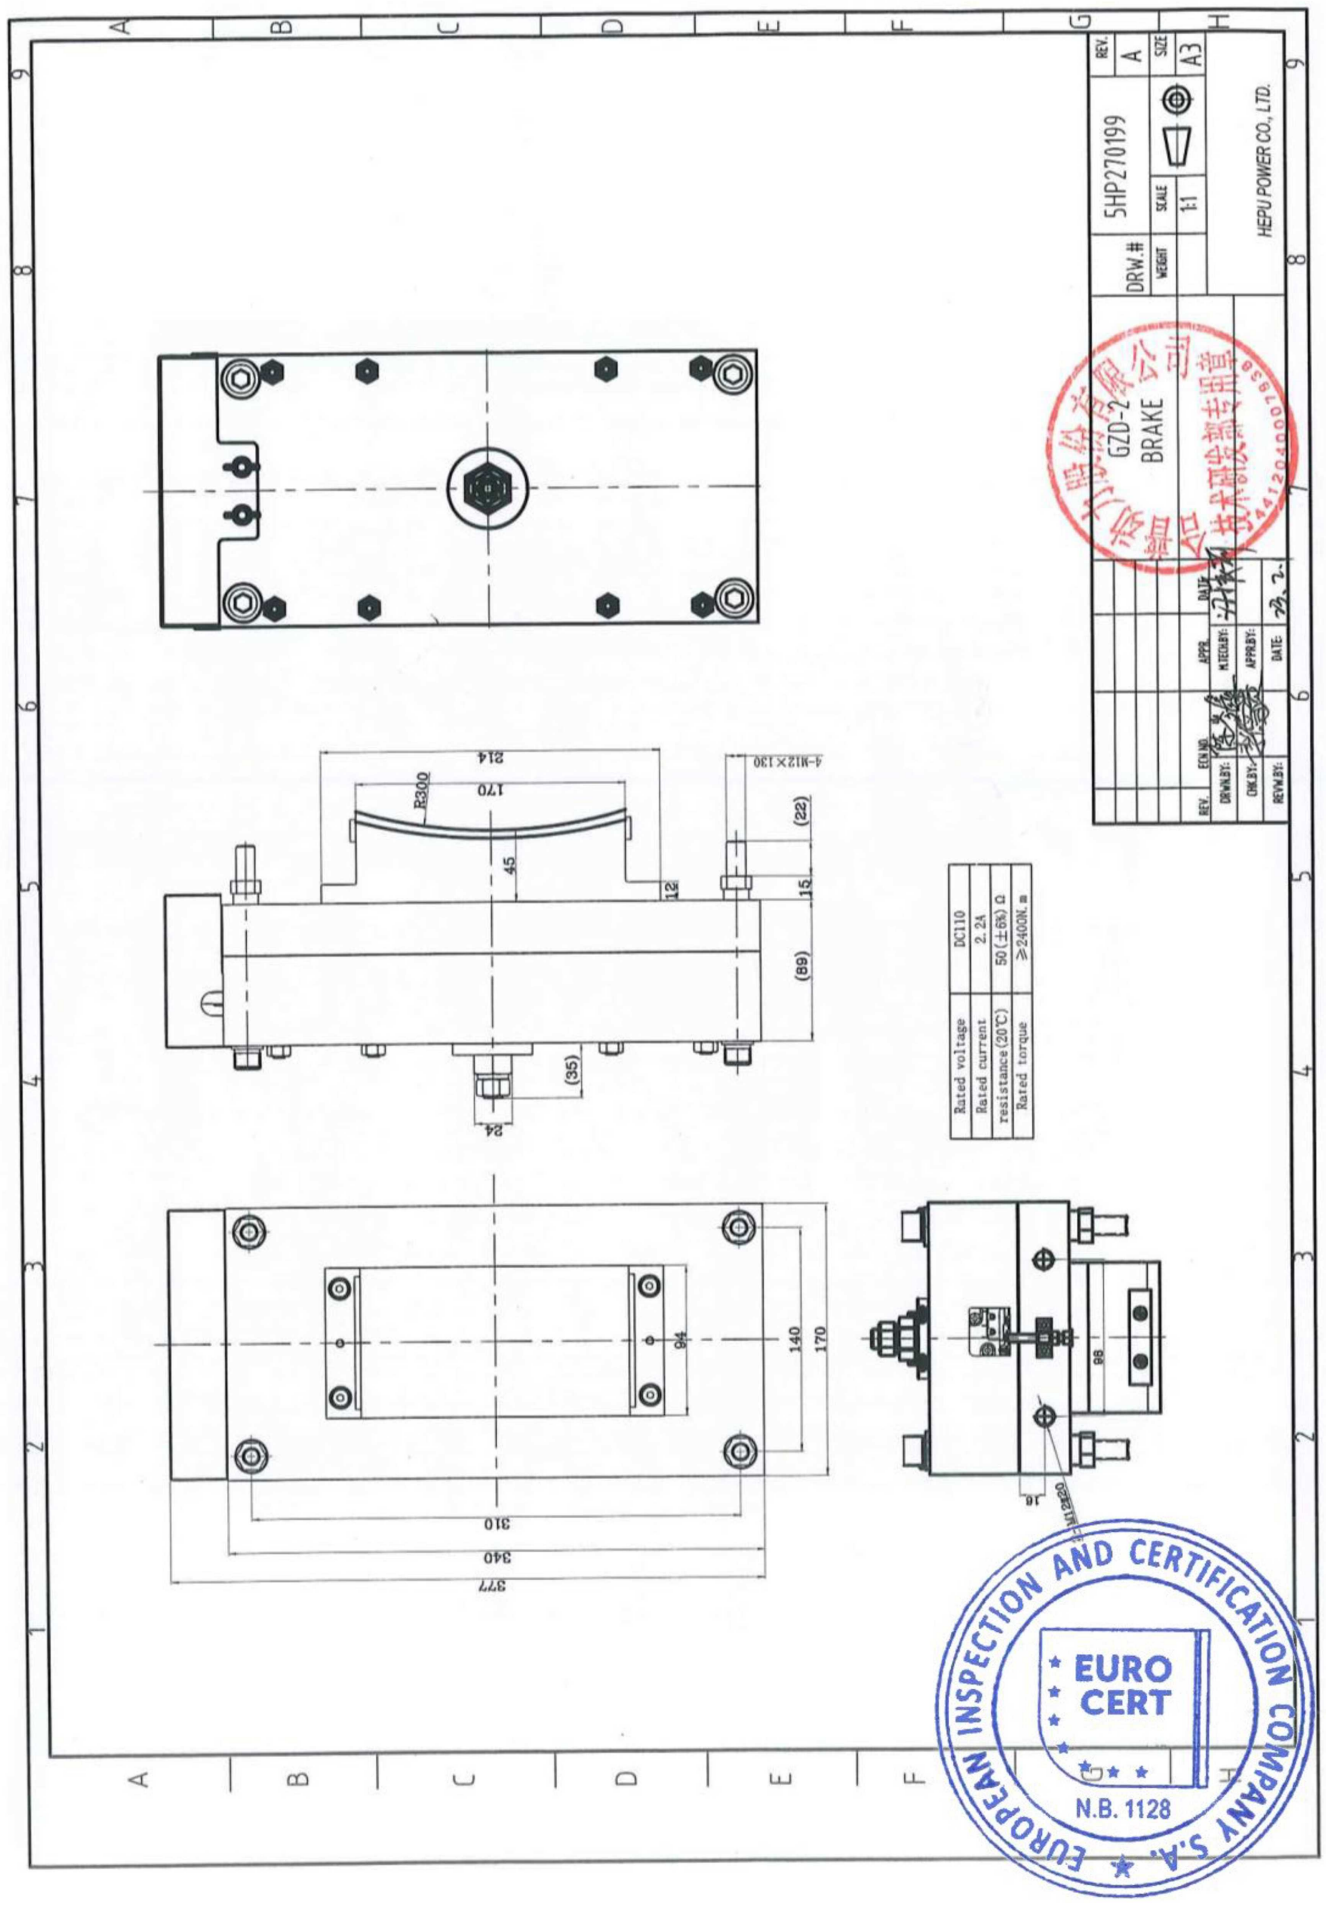

گواهی نامه ترمز
شماره گواهی نامه : SCMB.0468

EU TYPE-EXAMINATION CERTIFICATE FOR SAFETY COMPONENTS ACCORDING TO EUROPEAN LIFT DIRECTIVE 2014/33/EU ANNEX IV (MODULE B)

Certificate No.
SCMB.0468

Date of Issue
02/01/2024

Valid From
02/01/2024

The Certificate is valid until
01/01/2034

Applicant/Certificate Holder (Name & Address):	HEPU POWER CO., LTD. NO.26-1 Yingbin Avenue, Zhaoqing National Hi-Tech Industrial Development Zone, Zhaoqing, Guangdong, China
Manufacturer (Name & Address):	Same as applicant
Date of Submission:	01/12/2023
Test Laboratory (Name & Address):	Shenzhen Institute of Quality & Safety Inspection and Research TeJian Building,1032 HongGang Road, Luohu District, Shenzhen, Guangdong Province, China
Date and Number of test report:	17/11/2023 2023AF1123 17/11/2023 2023AF1116
Approved Type of UCM protection means:	Braking device as part of the Unintended Car Movement Protection (UCMP) means and Ascending Car Overspeed Protection (ACOP) means.
Application of UCM protection means:	Acting on the traction sheave shaft, as part of the protection device against unintended car movement and as part of the ascending car overspeed protection.
Model:	GZD-3 (2×700Nm)
Drawing Number *(attached to this certificate):*	5HP270231
Standard(s):	EN81-50:2020
Reference Standard(s)	EN81-20:2020

EUROCERT SA, aforementioned notified body with identification number 1128,
ascertains and certifies that above safety component satisfy the safety requirements of the European Directive 2014/33/EU.
The manufacturer is authorized to provide the safety component described above with the CE Mark as displayed below:

CE 1128

Preconditions:
It is required that the above safety equipment must always come with a declaration of conformity and the relevant instructions of use.

Please check the validity of the certificate from our website using the password **rB6kB5rC**

On behalf of EUROCERT S.A.,

GEORGE M. SIFONIOS
Director of International Markets

INSPECTOR

CHAD WANG

The data of this certificate were gathered with every possible thoroughness.
This certificate reflects the findings of the time and place of the audit.
Reproduction of this document is strictly forbidden.

EUROCERT S.A. 89 Chlois & Lykovriseos str., 144 52, Metamorphosi – Greece
T +30 210 62.52.495, +30 210 62.53.927, **F** +30 210 62.03.018, **M** info@eurocert.gr

ANNEX A

CERTIFICATE No.: SCMB.0468

TECHNICAL SPECIFICATIONS

Product Model	:	GZD-3
Application of Product:	:	Acting on the traction sheave shaft, as part of the protection device against unintended car movement and as part of the ascending car overspeed protection.
Material of Friction Element	:	Asbestos free
Action Method	:	Action when electrical power supply is off
Spring Type and Number	:	Cylindrical helical compression spring: DSZ8000N-9, quantity: 2×8
Inner/Outer Diameter of Braking Friction Disk	:	Φ180/Φ255
Nominal Brake Torque	:	2 × 700 (Nm)
Airgap	:	0.25-0.30 (mm)

1. *Braking device as part of the Ascending Car Overspeed Protection (ACOP) means*

Permissible System Total Mass (empty car mass + counterweight e.t.c.)	:	1028 - 2965 (kg)
Permissible Rated Load with Suspension Ratio of 2:1	:	320- 1050 (kg)
Range of Balance Coefficient	:	0.4 – 0.5
Rated Speed	:	0.5 - 2.0 (m/s)
Tripping Speed	:	0.58 - 2.63 (m/s)

EUROPEAN INSPECTION AND CERTIFICATION COMPANY S.A. EURO CERT N.B. 1128

ANNEX A
CERTIFICATE No.: SCMB.0468
TECHNICAL SPECIFICATIONS

2. Braking device as part of the Unintended Car Movement Protection (UCMP) means

Permissible System Total Mass (empty car mass + counterweight e.t.c.)	:	1028 - 2965 (kg)
Permissible Rated Load with Suspension ratio of 2:1	:	320- 1050 (kg)
Range of Balance Coefficient	:	0.4 – 0.5
Response Time	:	⩽200 (ms)
Max. Moving Distance (corresponding to the test speed)	:	≤407 (mm)

Note:
The suspension ratio of the sample during the type test is 2:1. When used for other suspension ratios, the applicable system mass, rated load and rated speed can be converted according to the actual suspension ratio according to the following formula:
(1) System quality application range = type test system quality range × actual suspension ratio ÷ suspension ratio of type test;
(2) Application range of rated load = rated load range of type test × actual suspension ratio ÷ suspension ratio of type test;
(3) Application range of rated speed = rated speed range of type test ÷ actual suspension ratio × type test suspension ratio.

Conditions:
1) Since the brake device represents only a part of the protection device against overspeed for the car moving in upwards direction an overspeed governor as per EN 81-20, paragraph 5.6.2.2.1 must be used to monitor the upward speed as well as the downward speed and the brake device must be triggered (engaged) via the overspeed governor's electric safety device.
2) Since the brake device represents only a part of the protection device against the unintended car movement. The complete system, apart from the stopping element, also consists of detection element and activation element. These components are subjected to their own type examination. Only the combination of the three parts can create a system which fulfills the requirement for protection against UCM in accordance with EN 81-20 paragraph 5.6.7.
3) The mechanical movement of each brake circuit is to be monitored separately and directly. If a brake circuit fails to engage (close) while the lift machine is at standstill, next movement of the lift must be prevented.
4) In cases where the lift machine moves despite the brake being engaged (closed), the lift machine must at the latest be stopped and the next movement of the lift must be prevented.

EUROPEAN INSPECTION AND CERTIFICATION COMPANY S.A. EURO CERT N.B. 1128

ANNEX B

CERTIFICATE No.: SCMB.0468

DESIGN DRAWINGS