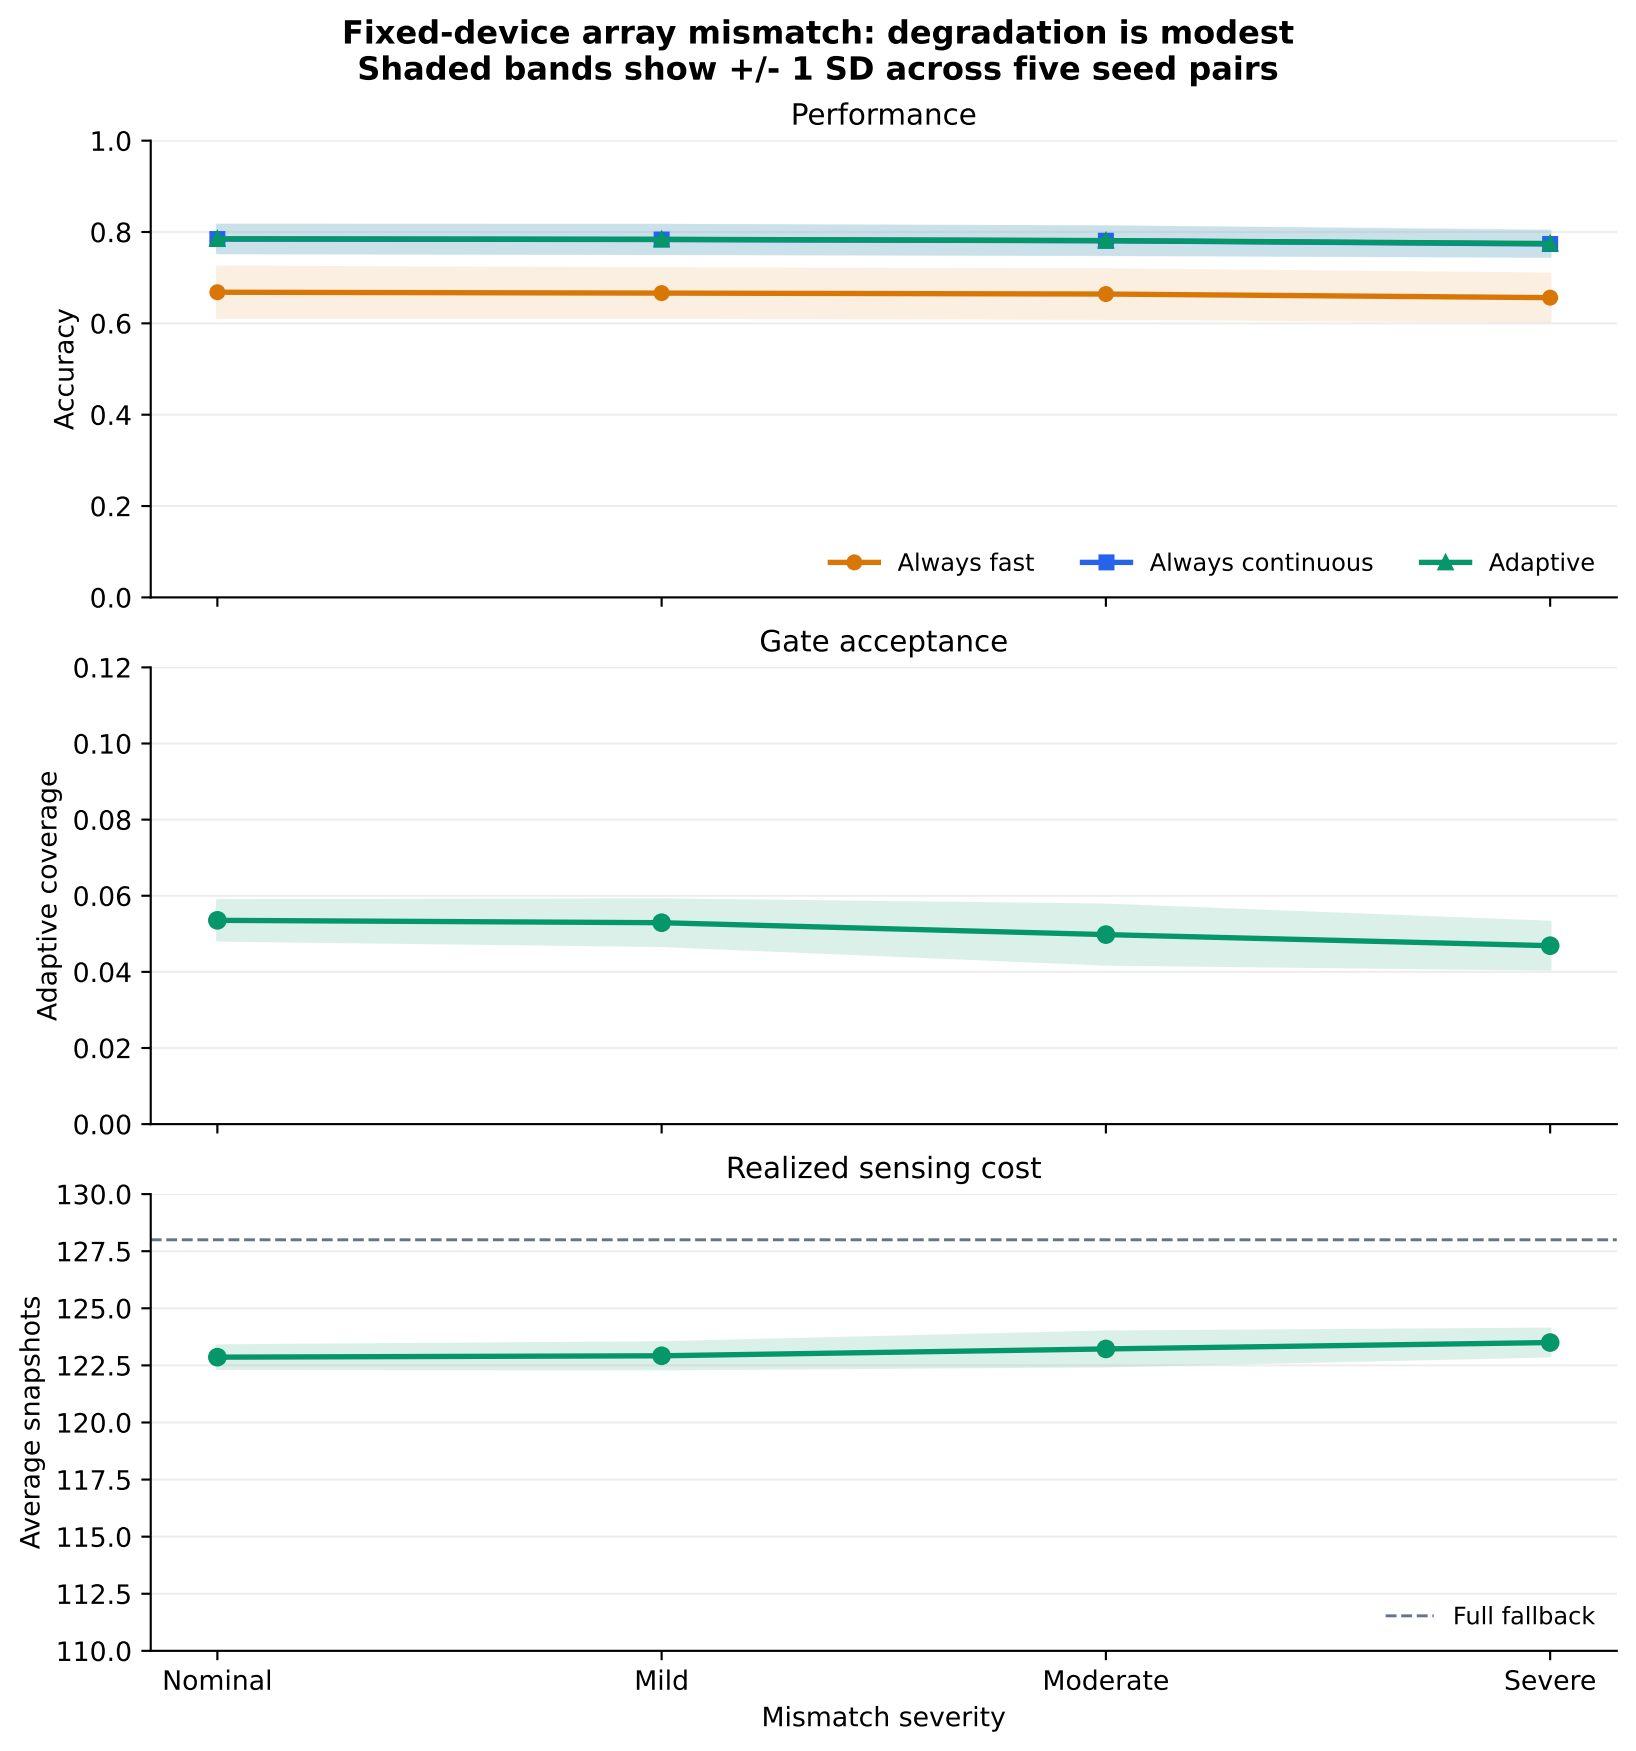
Fixed-device array mismatch: degradation is modest
Shaded bands show +/- 1 SD across five seed pairs
Performance
Accuracy
1.0
0.8
0.6
0.4
0.2
0.0
Always fast
Always continuous
Adaptive
Gate acceptance
Adaptive coverage
0.12
0.10
0.08
0.06
0.04
0.02
0.00
Realized sensing cost
Average snapshots
130.0
127.5
125.0
122.5
120.0
117.5
115.0
112.5
110.0
Full fallback
Nominal
Mild
Moderate
Severe
Mismatch severity