Direct U-Net with hydraulic halo

Observed-state, lead-conditioned flood forecasting | Implemented V5-B design

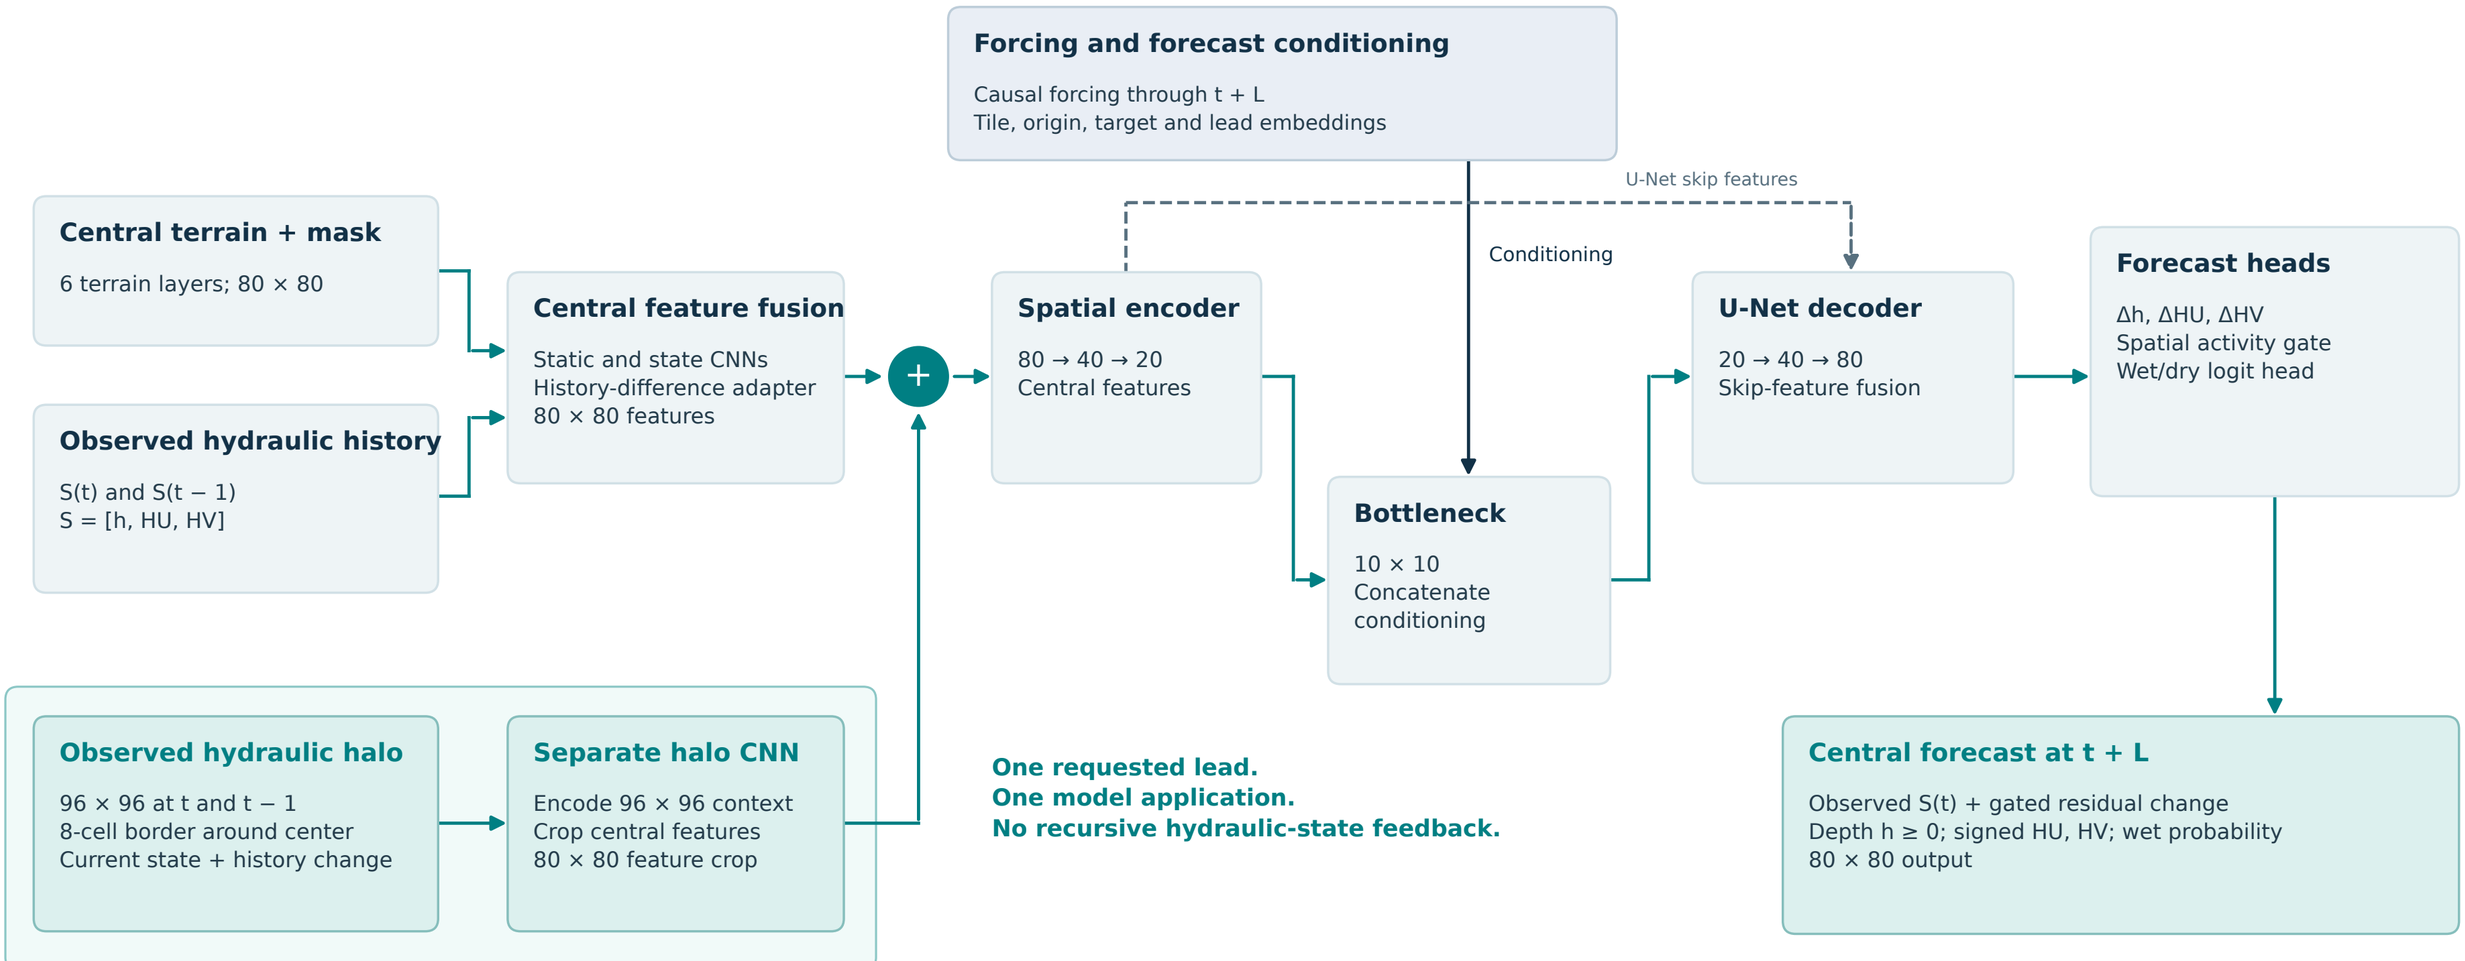

Lead L: 0.5–24 h • HU/HV: signed unit discharge (m²/s) • Halo features are added before spatial downsampling

Method schematic, not validated performance evidence. Corrected-data baseline and halo comparisons are pending.