

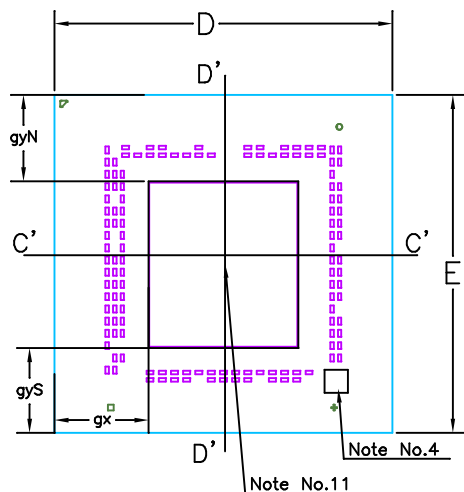


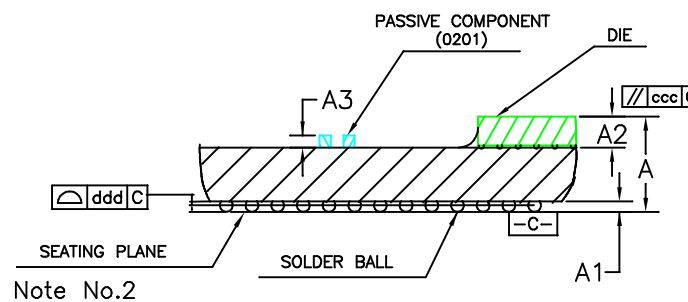


SECTION D'-D'




DETAIL : "A"

Note No.6

Symbol	Dimension in		mm
	MIN	NOM	
A	2.42	2.64	2.86
A1	0.22	0.32	0.42
A2	0.78	0.83	0.88
A3	0.27	0.3	0.33
D/E	28.90	29.00	29.10
D1/E1	27.5		
D3	12.8647		
E3	14.2952		
e	0.70		
fx/fy	0.75		
gx	8.07		
gN/gS	7.43 / 7.27		
aaa	0.1		
b	0.35	0.4	0.45
ccc	0.2		
ddd	0.15		
eee	0.15		
fff	0.08		
MD/ME	41/41		
TOTAL No. OF BALLS : 1617			

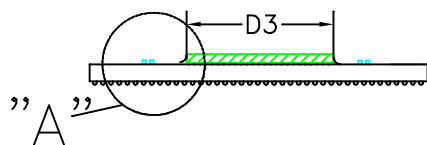

SECTION C'-C'

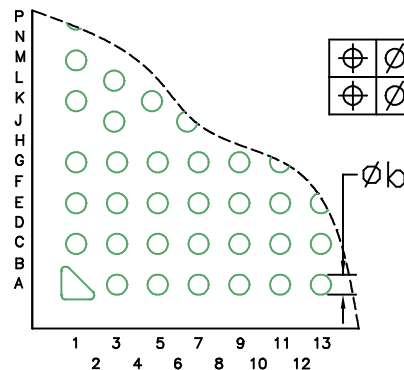

DETAIL : "B"

Note No.3,5&6

NOTE :

1. CONTROLLING DIMENSION : MILLIMETER.

△ PRIMARY DATUM C AND SEATING PLANE ARE DEFINED BY THE SPHERICAL CROWNS OF THE SOLDER BALLS.

△ DIMENSION b IS MEASURED OF THE SOLDER BALL DIAMETER, PARALLEL TO PRIMARY DATUM C.

4. 2D BARCODE LOCATION ON SUBSTRATE

5. THE PATTERN OF PIN 1 FIDUCIAL IS FOR REFERENCE ONLY.

6. DRAWING NOT TO SCALE.

7. ALL PASSIVE LOCATIONS SHOWN, SOME OR ALL LOCATIONS MAY NOT BE POPULATED.

8. BGA PAD SOLDER MASK OPENING = 0.35±0.05 MM.

9. RAW SOLDER BALL DIAMETER = 0.4 MM.

10. DOES NOT SHOW EXACT POSITIONS OF CAPACITORS

11. Deviation of die center from package center:
X axis: 0mm, Y axis: 0.08mm to the south



TITLE: Argaman(29x29 mm Bare die 14L 0.7mm BGA Pitch 1617 FCBGA) PACKAGE OUTLINE DRAWING

Drawing No. 442-CX09-000

Rev. A Sheet 1 of 2