


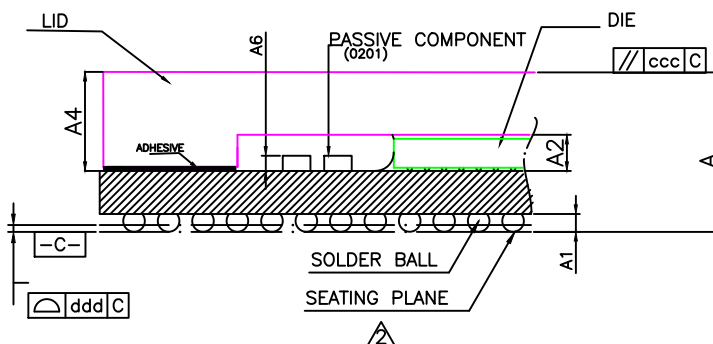
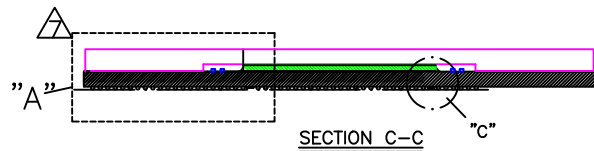


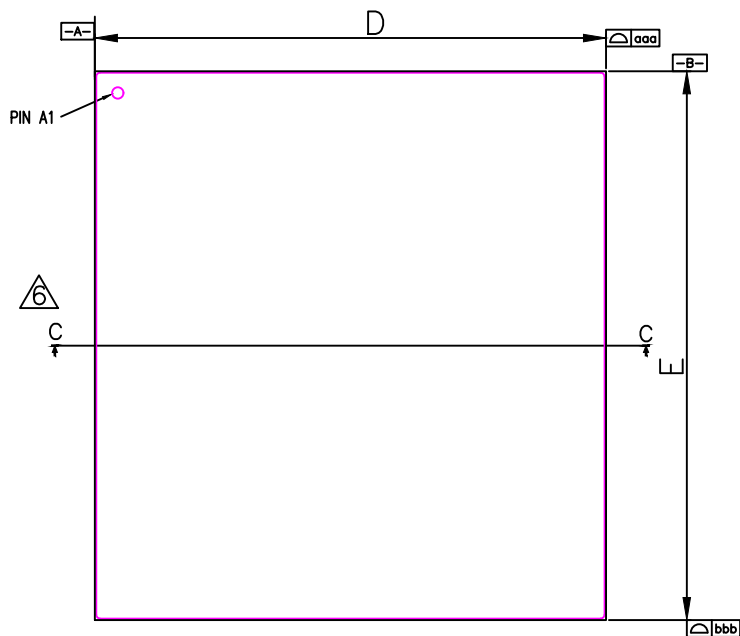

DETAIL : "A"

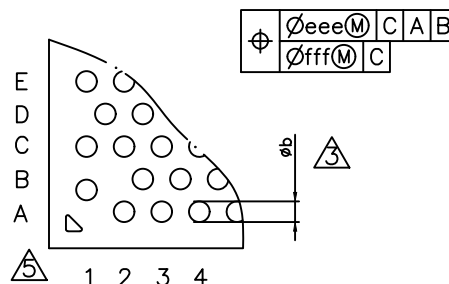

DETAIL : "B"



SECTION D-D, DETAIL : "C"

Symbol	Dimension in mm		
	MIN	NOM	MAX
A	5.330	5.520	5.710
A1	0.38	0.44	0.50
A2	0.89	0.96	1.03
A4	2.83	2.98	3.13
A6	0.30	0.35	0.39
D/E	68.00 / 73.00		
D1/E1	66.00 / 71.06		
D2/E2	N/A / 71.40		
e	1.00		
f	0.867		
fx	1.00		
fy1/2	0.97 / 0.80		
b	0.50	0.60	0.70
aaa	0.20		
bbb	0.20		
ccc	0.30		
ddd	0.35		
eee	0.15		
fff	0.08		
MD/ME	67/72		
TOTAL No. OF BALLS : 5117			

NOTE :

- CONTROLLING DIMENSION : MILLIMETER.
- PRIMARY DATUM C AND SEATING PLANE ARE DEFINED BY THE SPHERICAL CROWNS OF THE SOLDER BALLS.
- DIMENSION b IS MEASURED AT THE MAXIMUM SOLDER BALL DIAMETER, PARALLEL TO PRIMARY DATUM C.
- ALL PASSIVE LOCATIONS SHOWN, SOME OR ALL LOCATIONS MAY NOT BE POPULATED.
- THE PATTERN OF PIN 1 FIDUCIAL IS FOR REFERENCE ONLY.
- DIE SIZE: X=24.26mm Y=31.13mm $\pm$ 0.3 mm
- DRAWING NOT TO SCALE.
- BGA PAD SOLDER MASK OPENING = 0.55 $\pm$ 0.05mm
- RAW SOLDER BALL SIZE = 0.60mm
- DIMENSION A INCLUDES 0.10mm WARPAGE
- DIMENSION A2 INCLUDES TIM thickness



TITLE: TH500 (68x73mm,14L,5117,HS-FCBGA) DRAWING

Drawing No. 442-0398-000

Rev. C Sheet 1 of 2

NVIDIA CONFIDENTIAL

REVISION HISTORY :

[illegible]