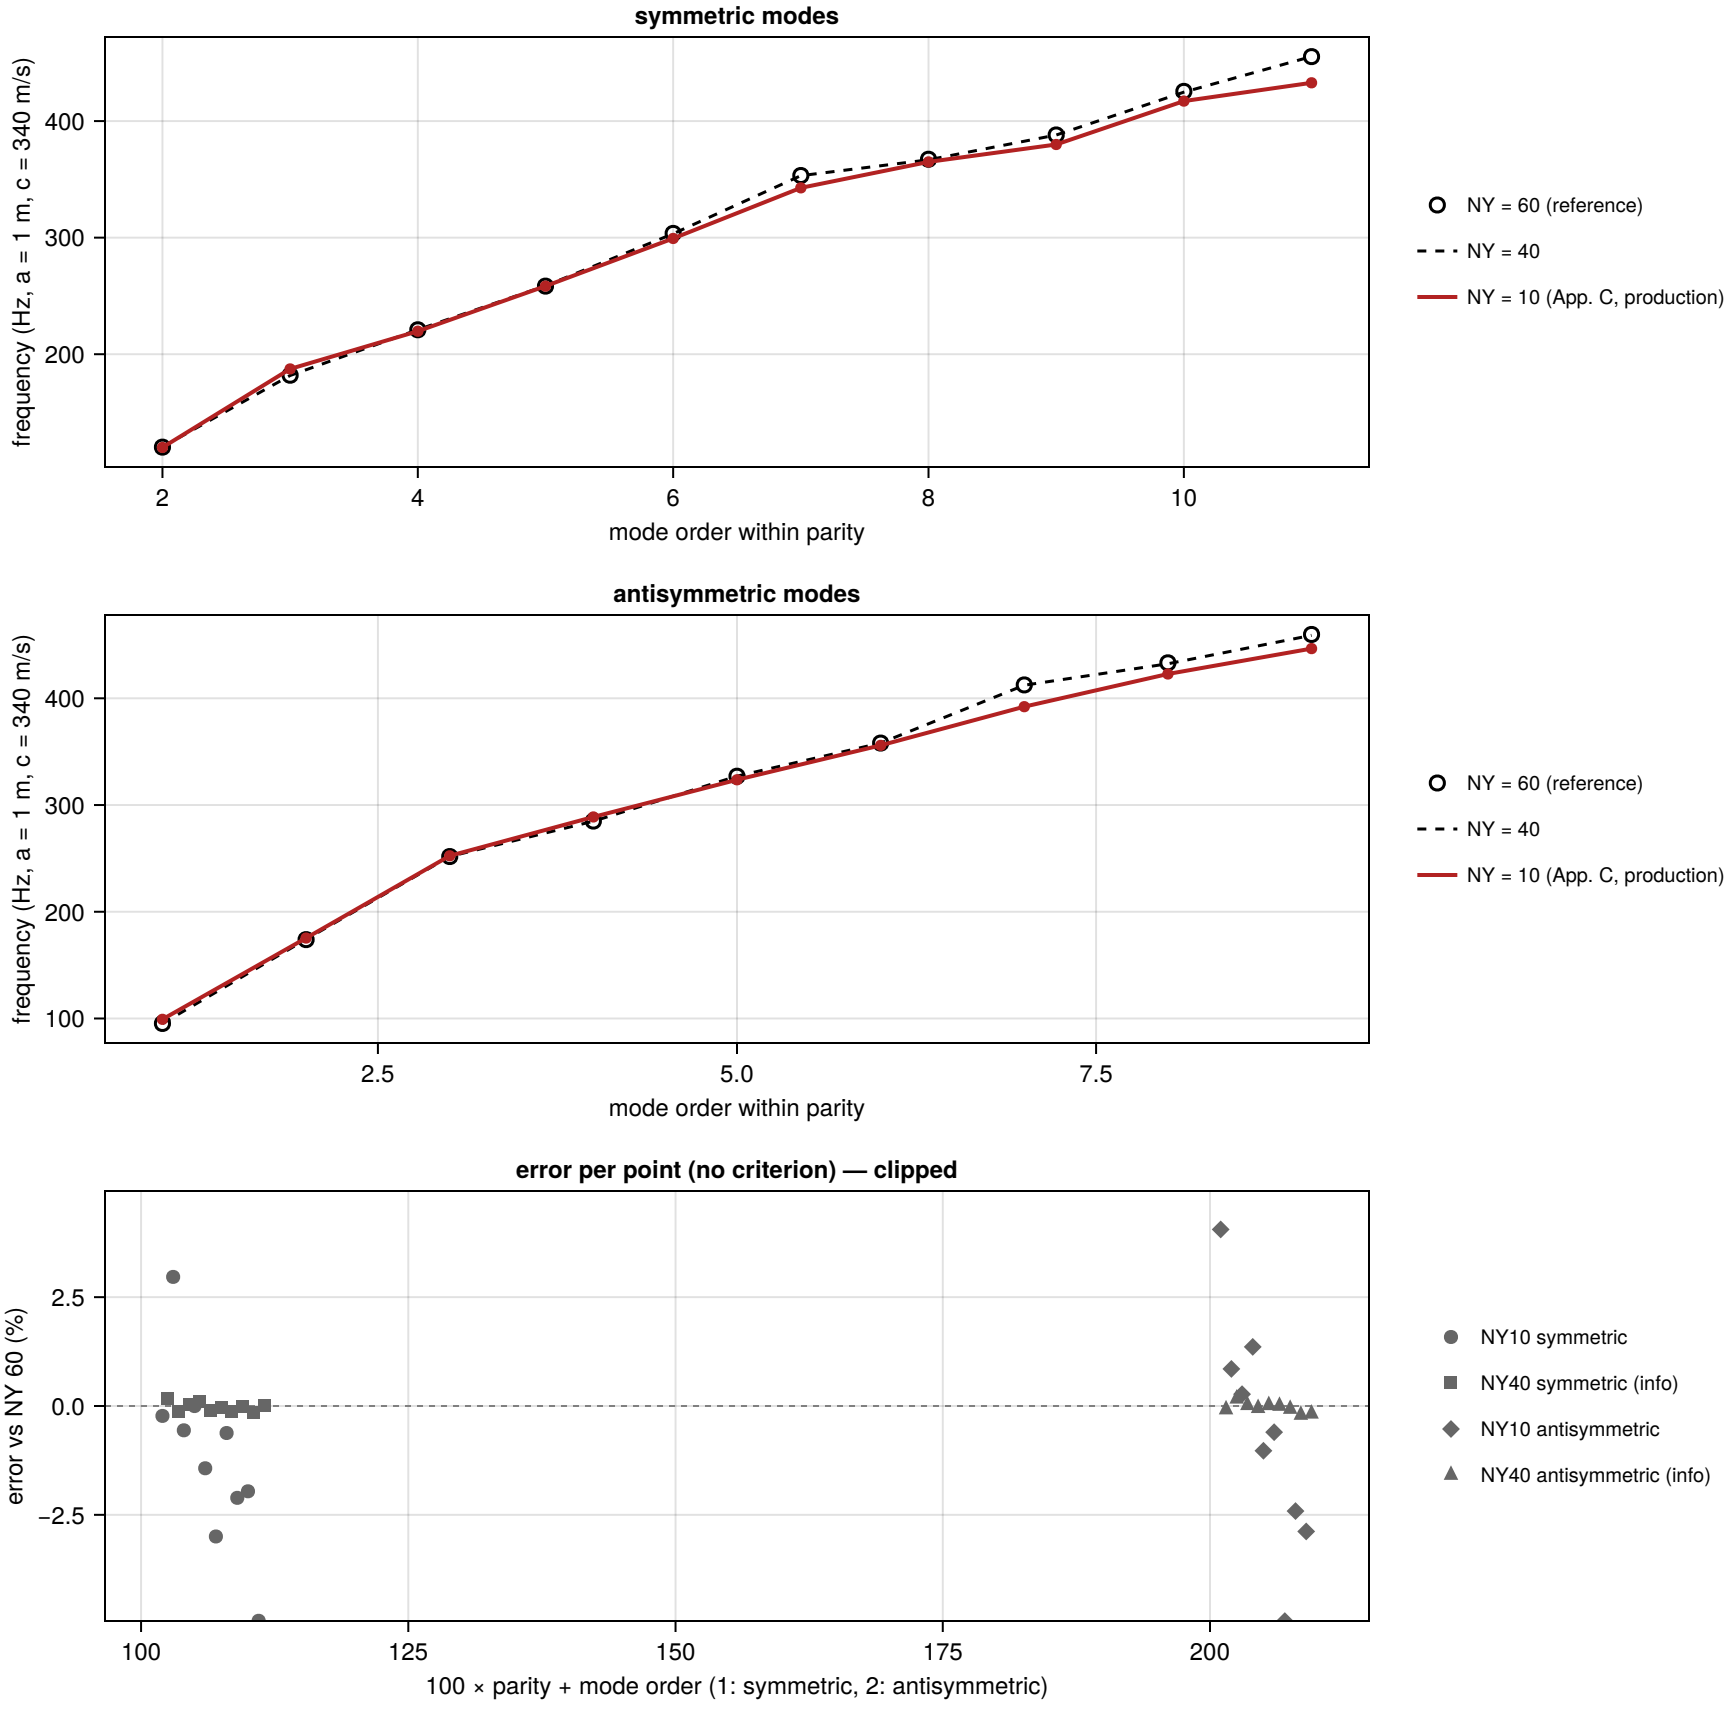
symmetric modes
frequency (Hz, a = 1 m, c = 340 m/s)
400
300
200
2
4
6
8
10
mode order within parity
NY = 60 (reference)
NY = 40
NY = 10 (App. C, production)
antisymmetric modes
frequency (Hz, a = 1 m, c = 340 m/s)
400
300
200
100
2.5
5.0
7.5
mode order within parity
NY = 60 (reference)
NY = 40
NY = 10 (App. C, production)
error per point (no criterion) — clipped
error vs NY 60 (%)
2.5
0.0
−2.5
100
125
150
175
200
100 × parity + mode order (1: symmetric, 2: antisymmetric)
NY10 symmetric
NY40 symmetric (info)
NY10 antisymmetric
NY40 antisymmetric (info)