Chapter 4
Network Layer: Data Plane

A note on the use of these PowerPoint slides:

We're making these slides freely available to all (faculty, students, readers). They're in PowerPoint form so you see the animations; and can add, modify, and delete slides (including this one) and slide content to suit your needs. They obviously represent a *lot* of work on our part. In return for use, we only ask the following:

- If you use these slides (e.g., in a class) that you mention their source (after all, we'd like people to use our book!)
- If you post any slides on a www site, that you note that they are adapted from (or perhaps identical to) our slides, and note our copyright of this material.

For a revision history, see the slide note for this page.

Thanks and enjoy! JFK/KWR

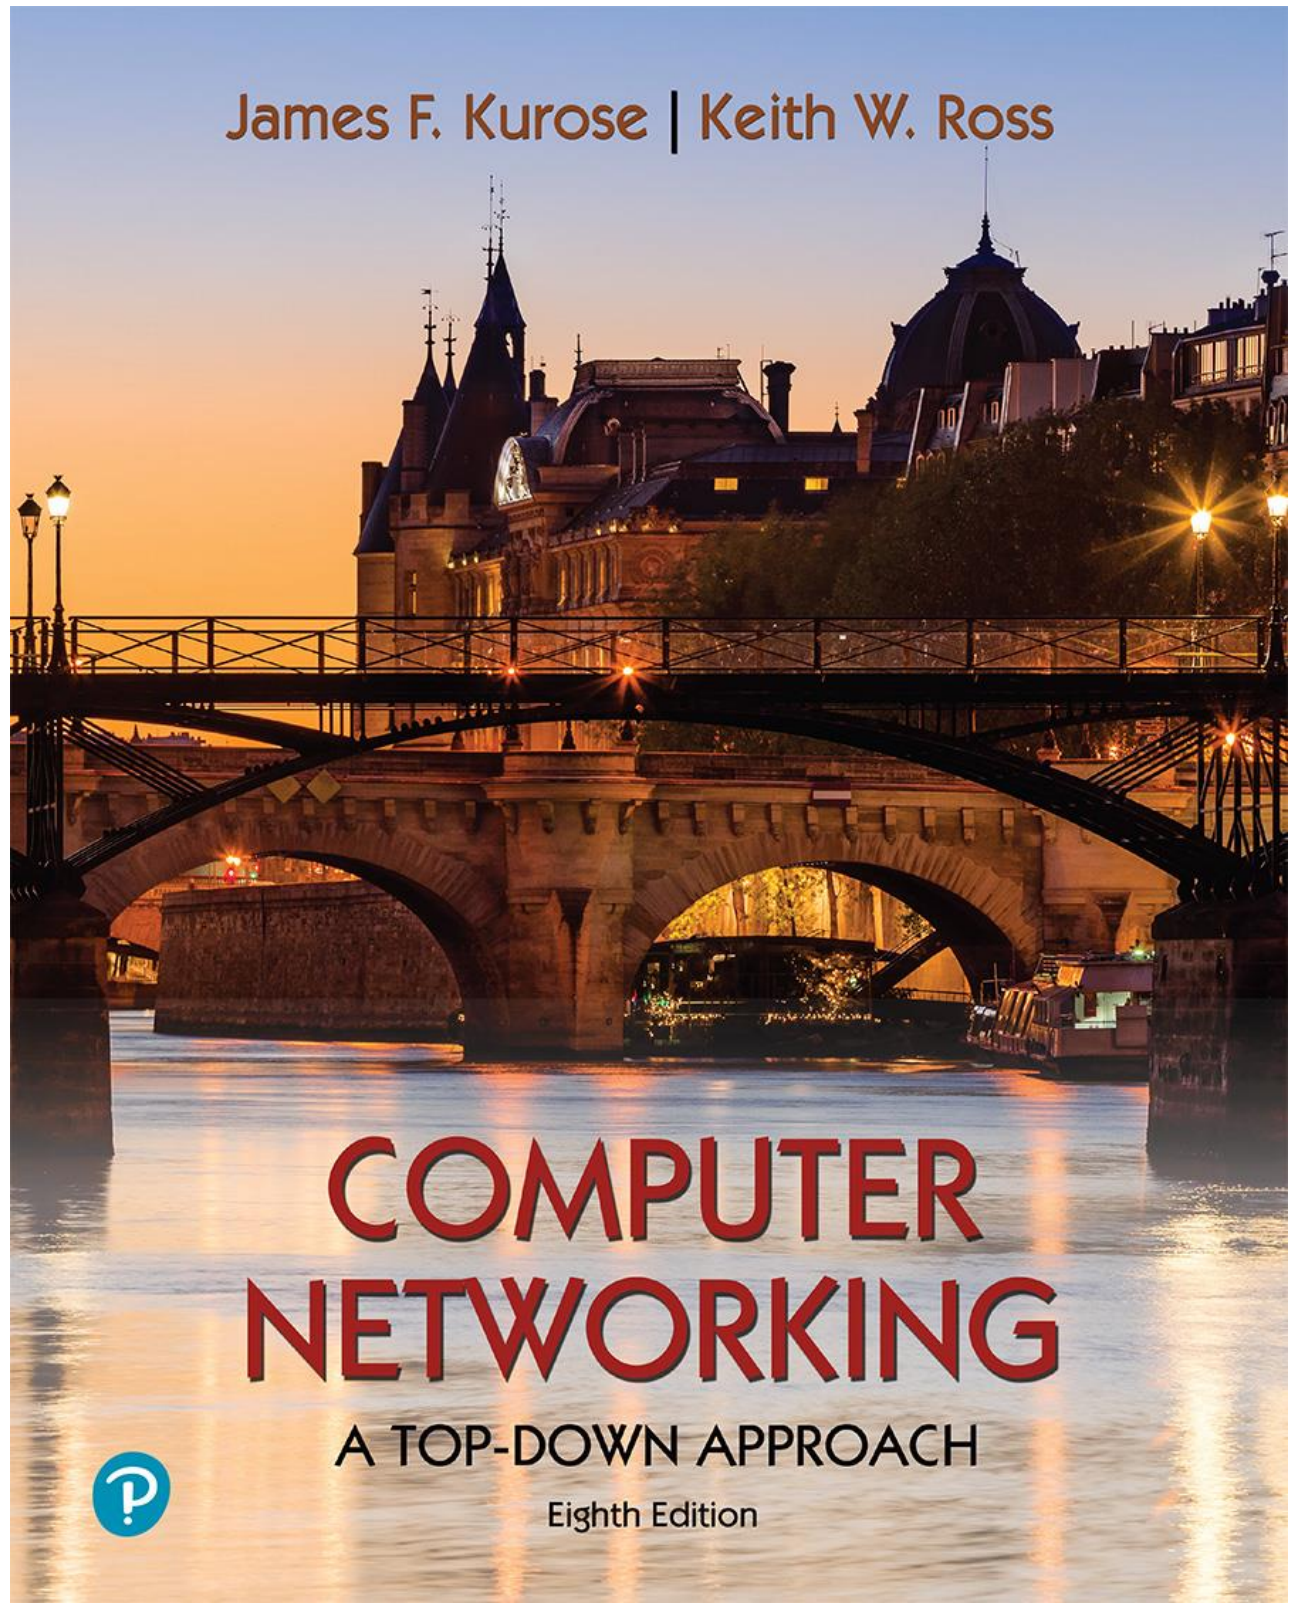

Computer Networking: A Top-Down Approach
8th edition
Jim Kurose, Keith Ross
Pearson, 2020

Network-layer services and protocols

- transport segment from sending to receiving host
  - sender: encapsulates segments into datagrams, passes to link layer
  - receiver: delivers segments to transport layer protocol
- network layer protocols in *every Internet device*: hosts, routers
- routers:
  - examines header fields in all IP datagrams passing through it
  - moves datagrams from input ports to output ports to transfer datagrams along end-end path

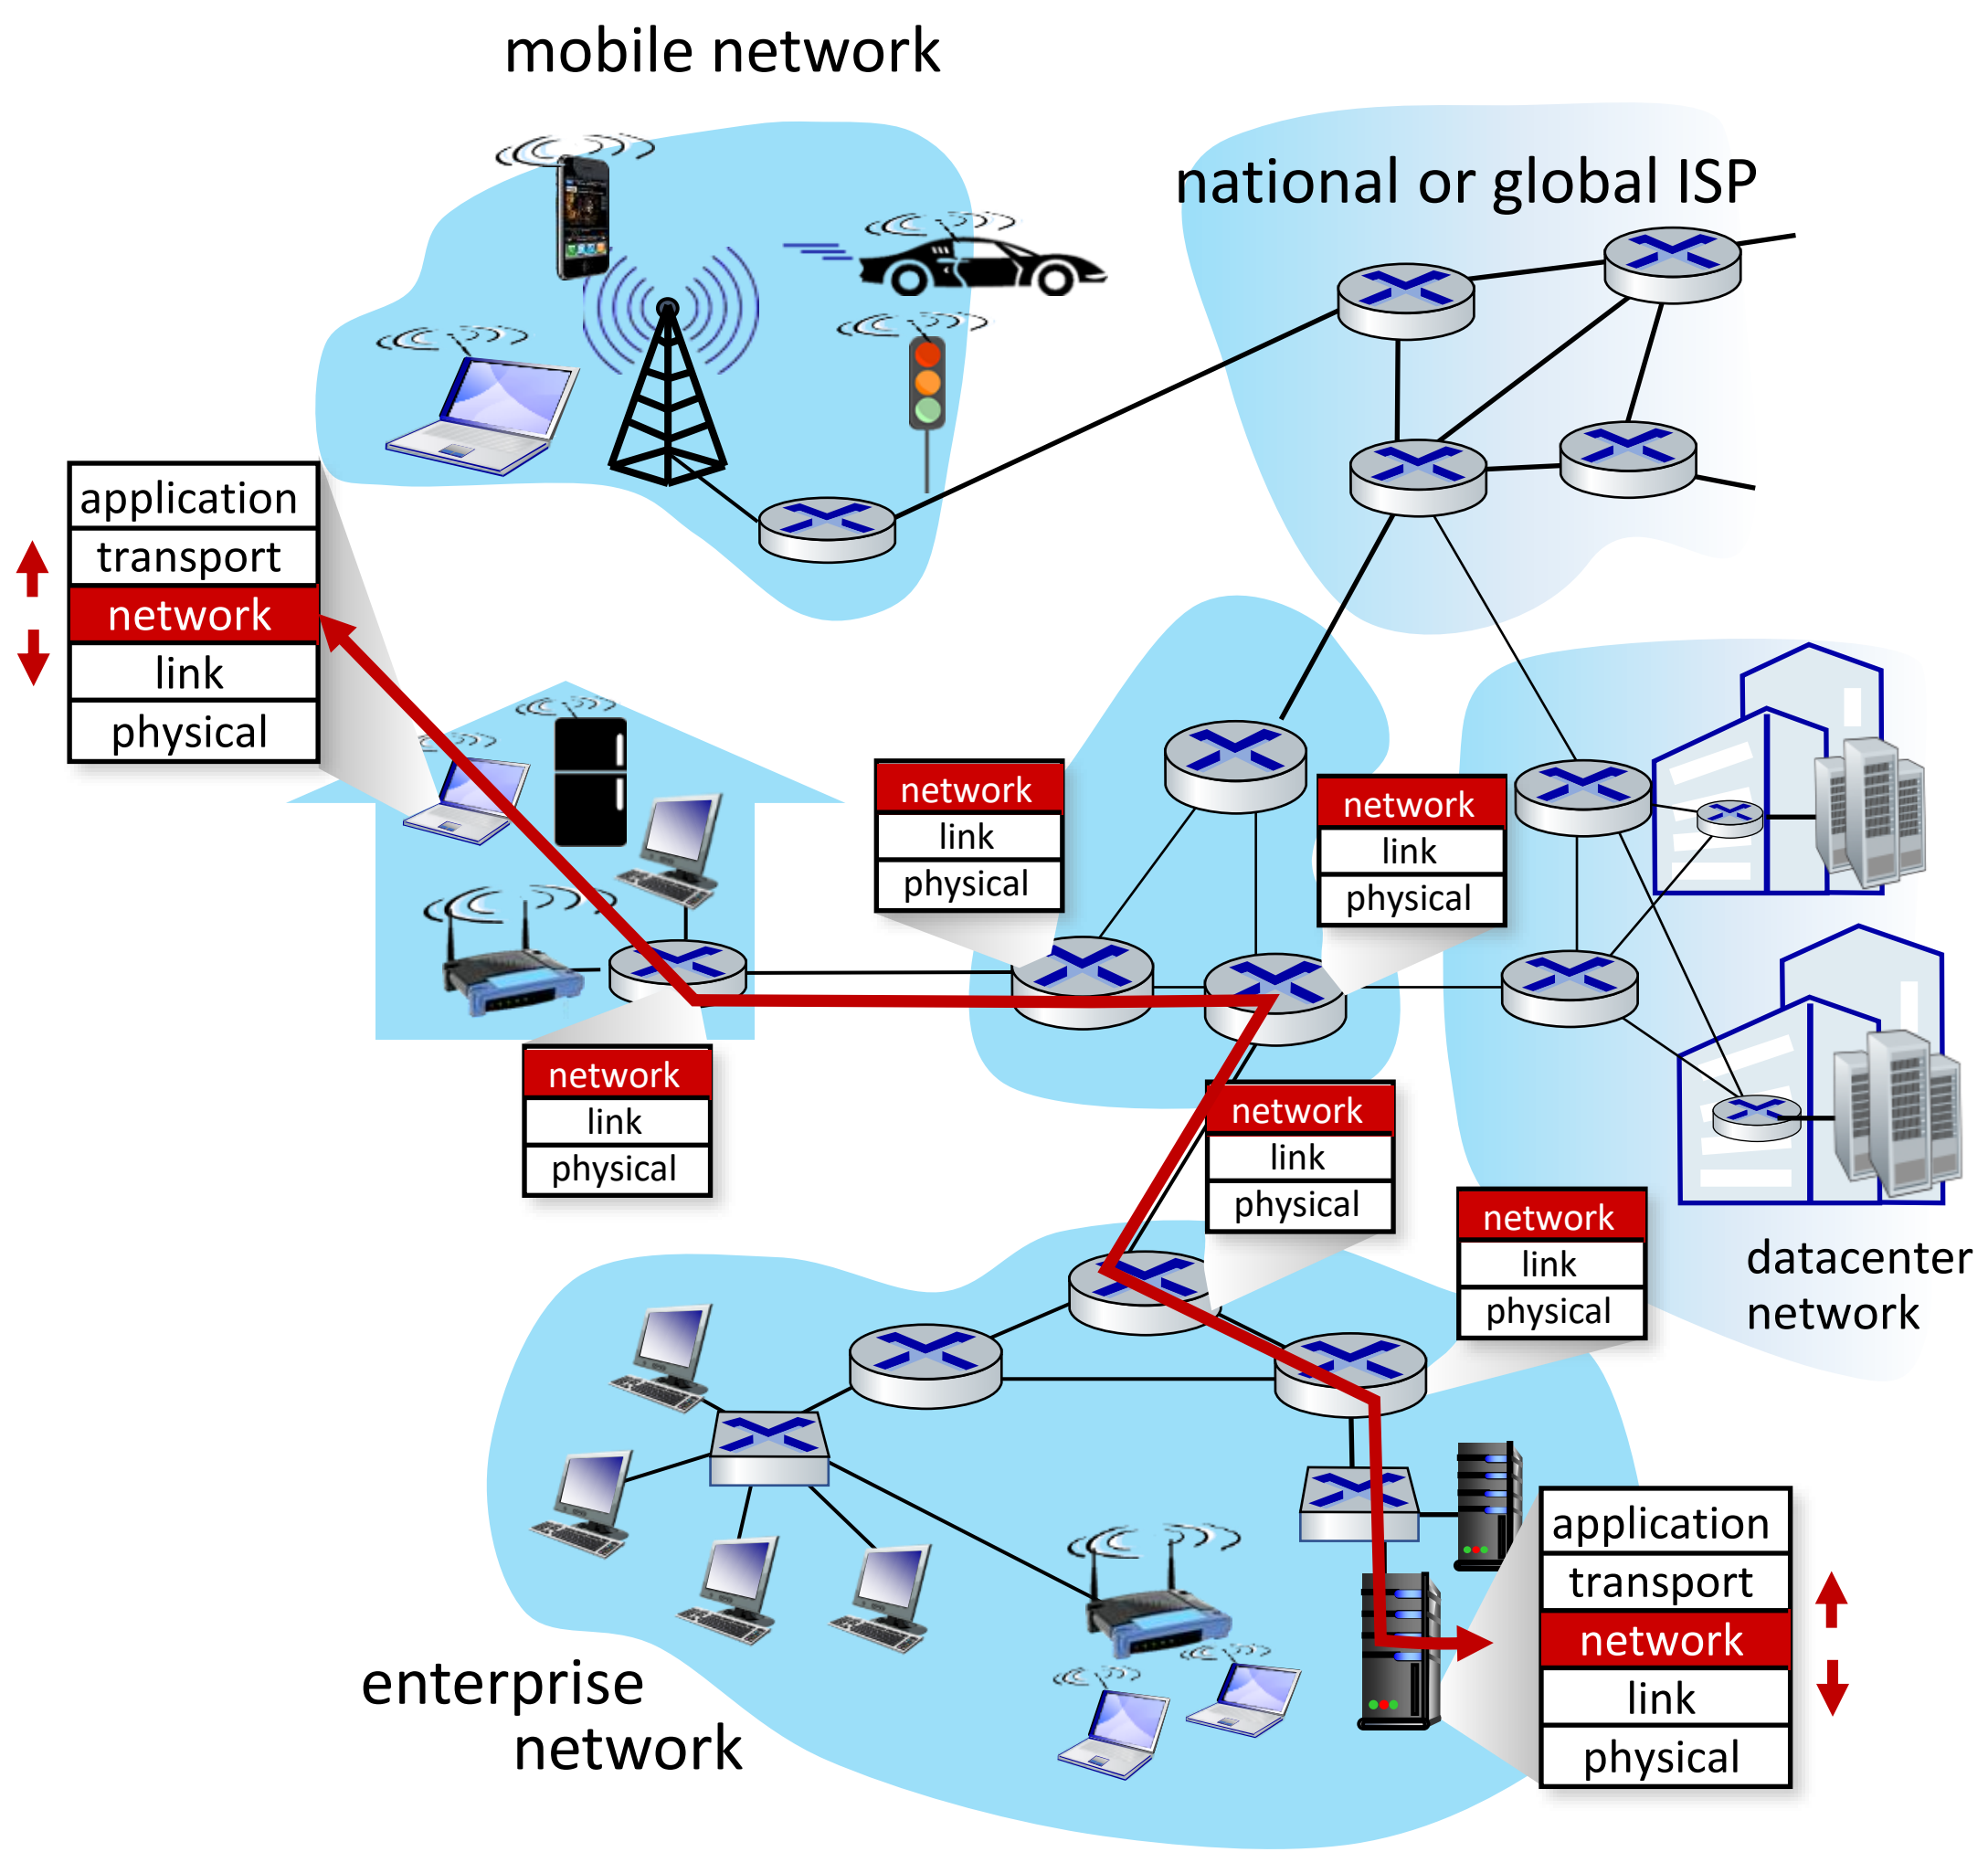

Two key network-layer functions

network-layer functions:

- *forwarding:* move packets from a router's input link to appropriate router output link
- *routing:* determine route taken by packets from source to destination
  - *routing algorithms*

analogy: taking a trip

- *forwarding:* process of getting through single interchange
- *routing:* process of planning trip from source to destination

forwarding

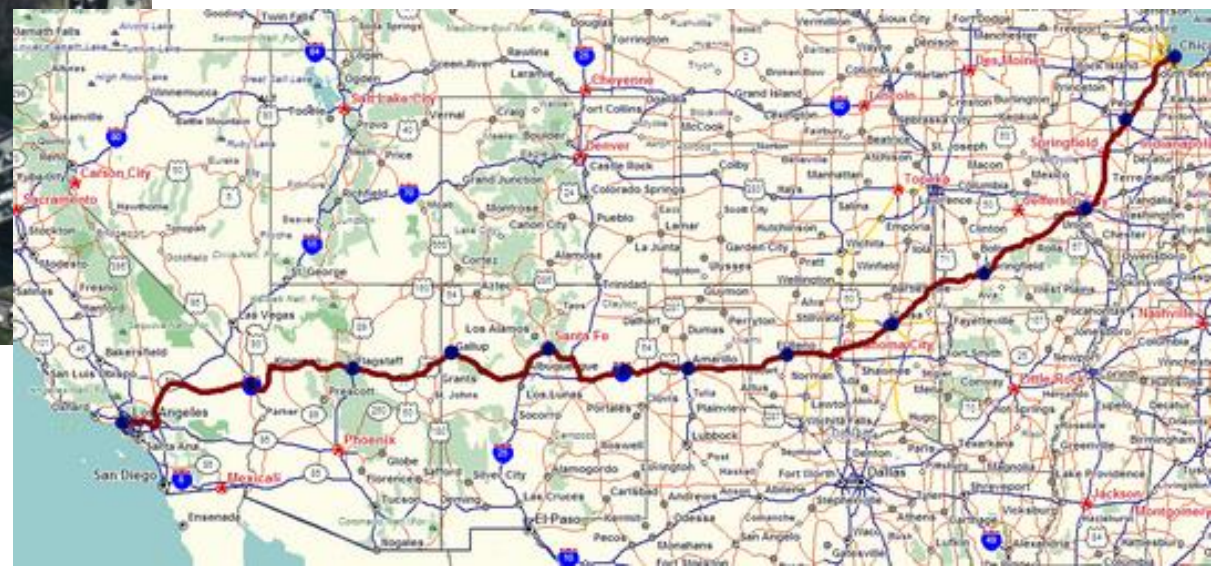

routing

Network layer: data plane, control plane

Data plane:

- *local*, per-router function
- determines how datagram arriving on router input port is forwarded to router output port

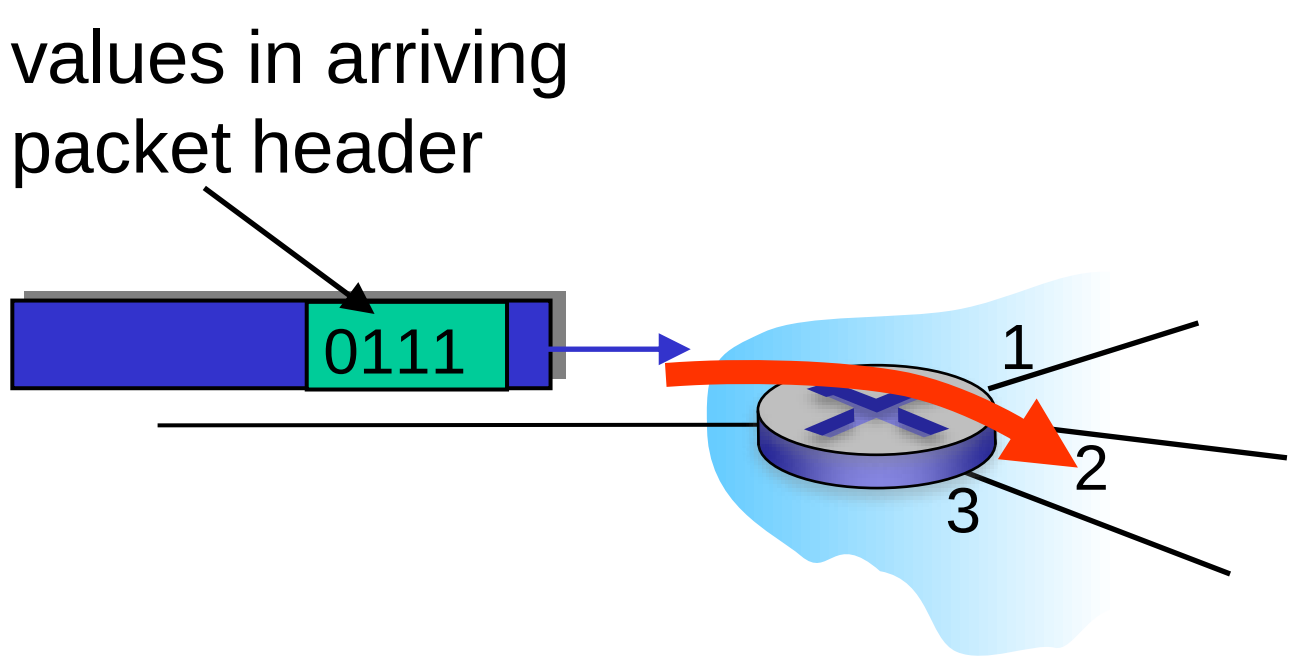

Control plane

- *network-wide* logic
- determines how datagram is routed among routers along end-end path from source host to destination host
- two control-plane approaches:
  - *traditional routing algorithms:* implemented in routers
  - *software-defined networking (SDN)*: implemented in (remote) servers

Per-router control plane

Individual routing algorithm components *in each and every router* interact in the control plane

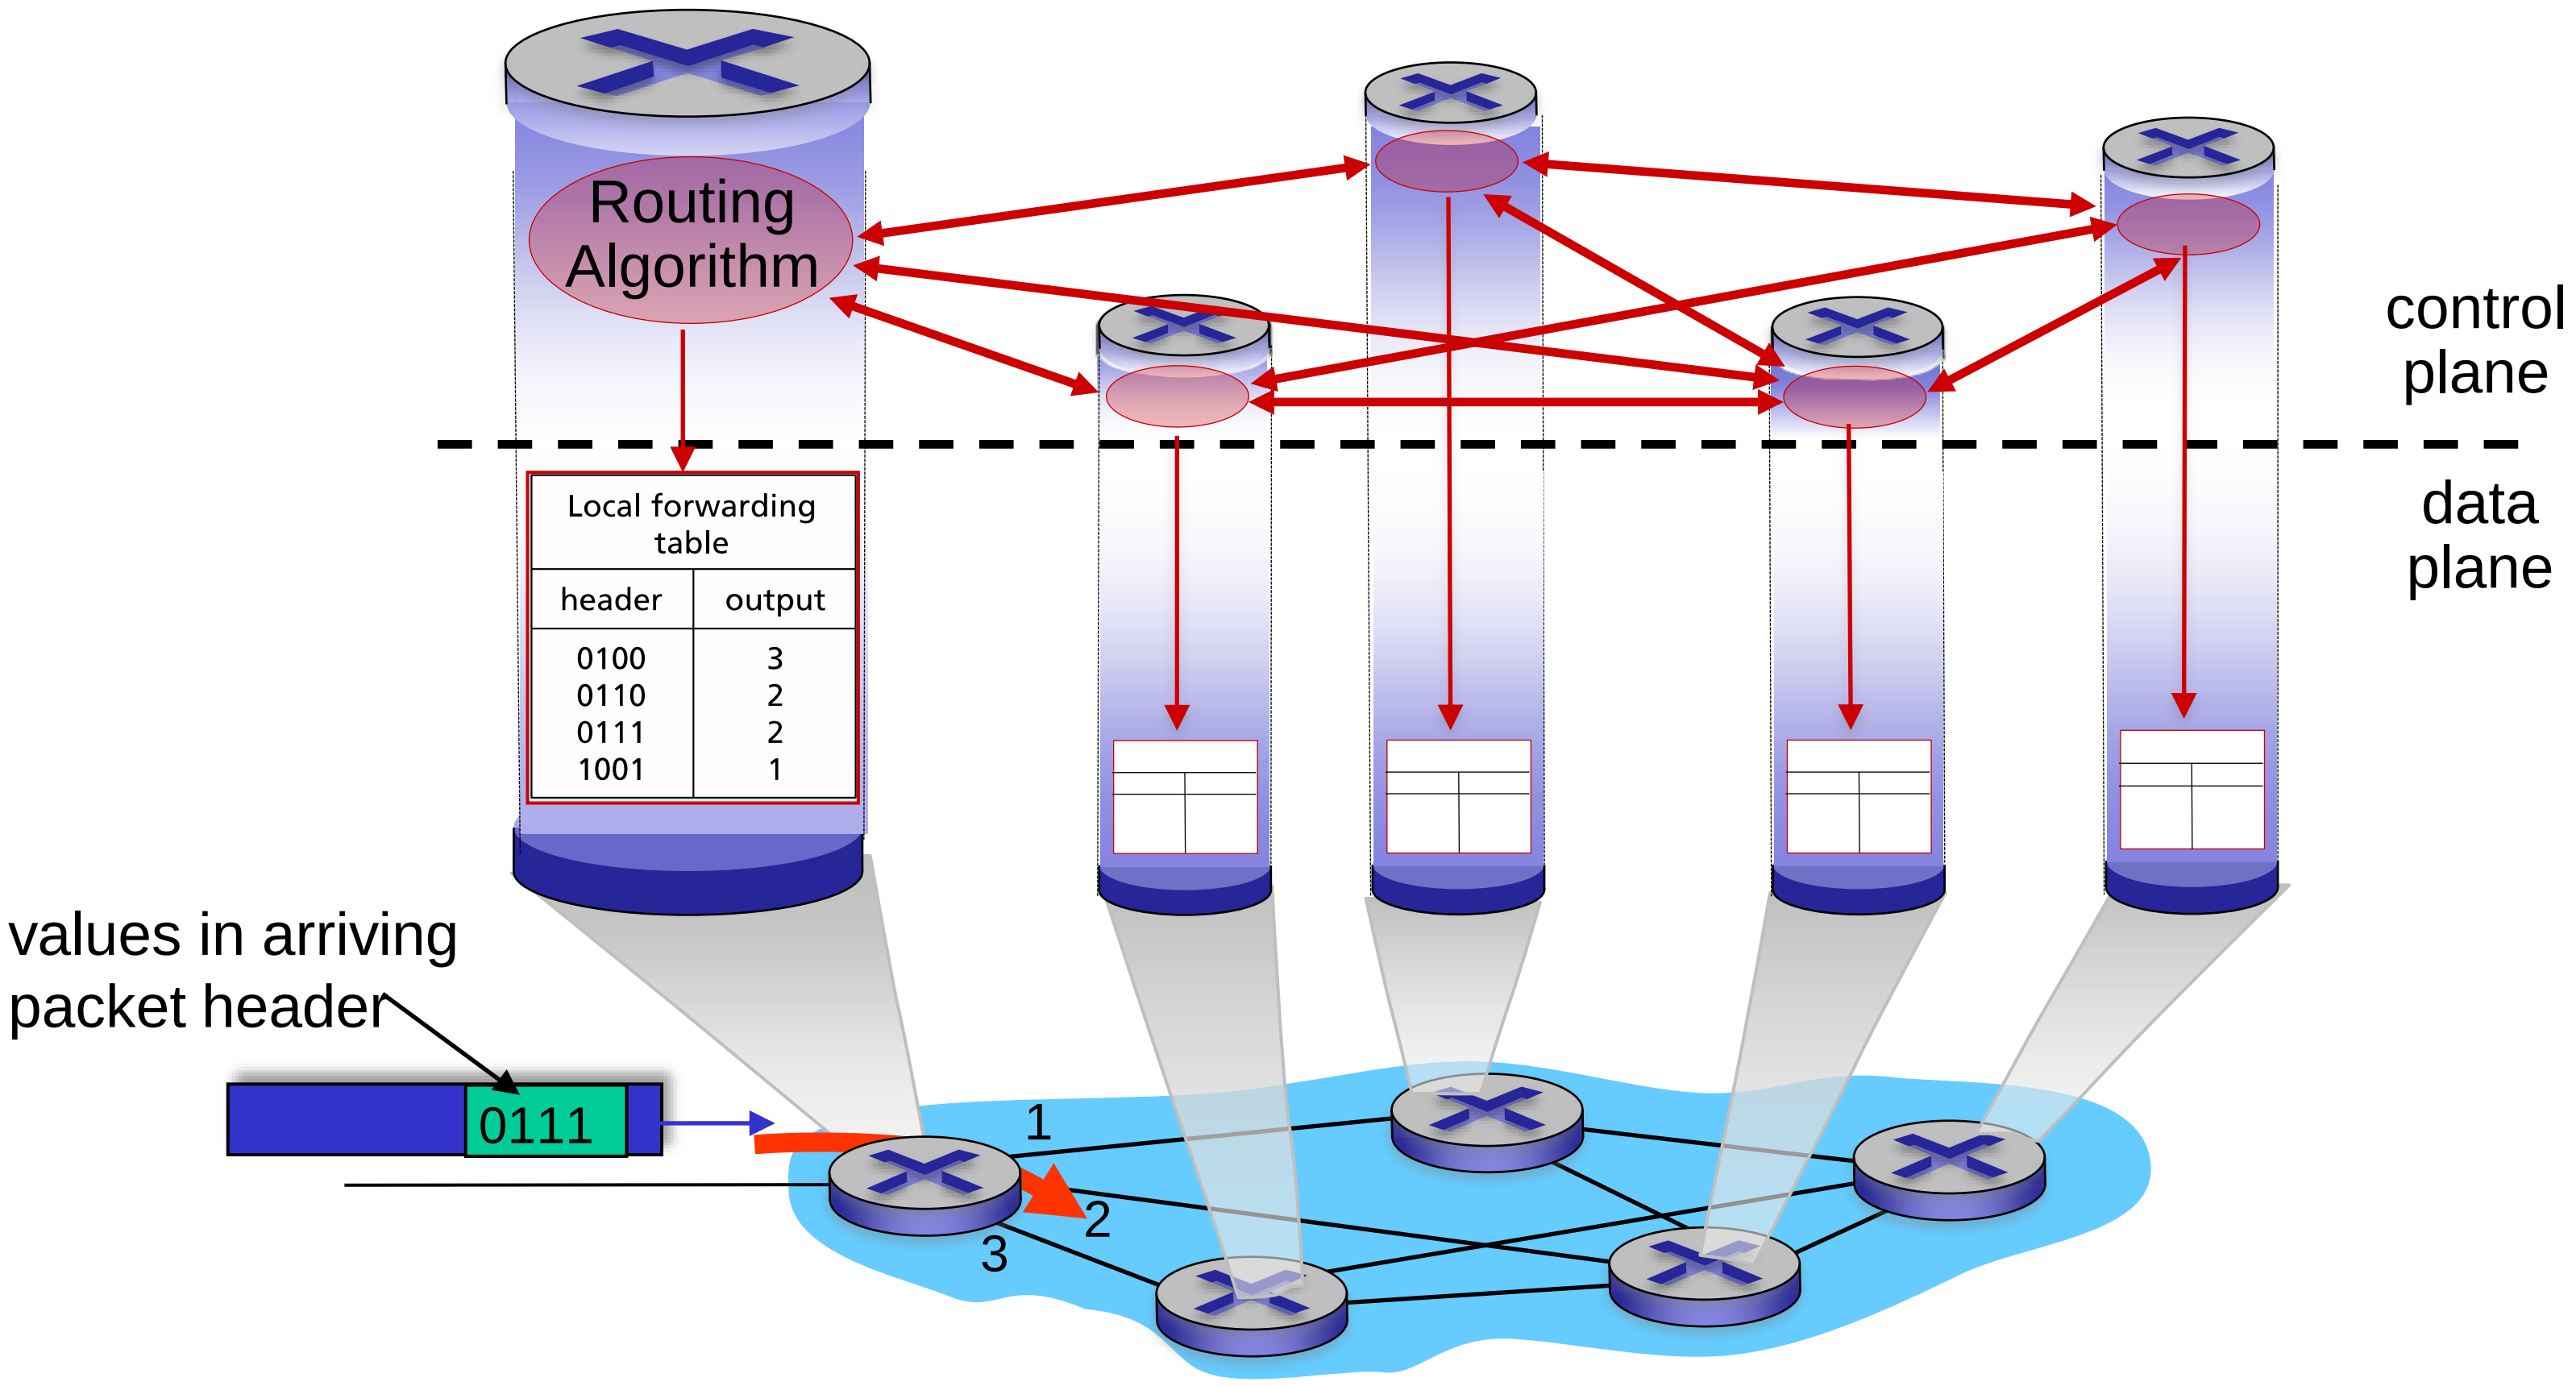

Software-Defined Networking (SDN) control plane

Remote controller computes, installs forwarding tables in routers

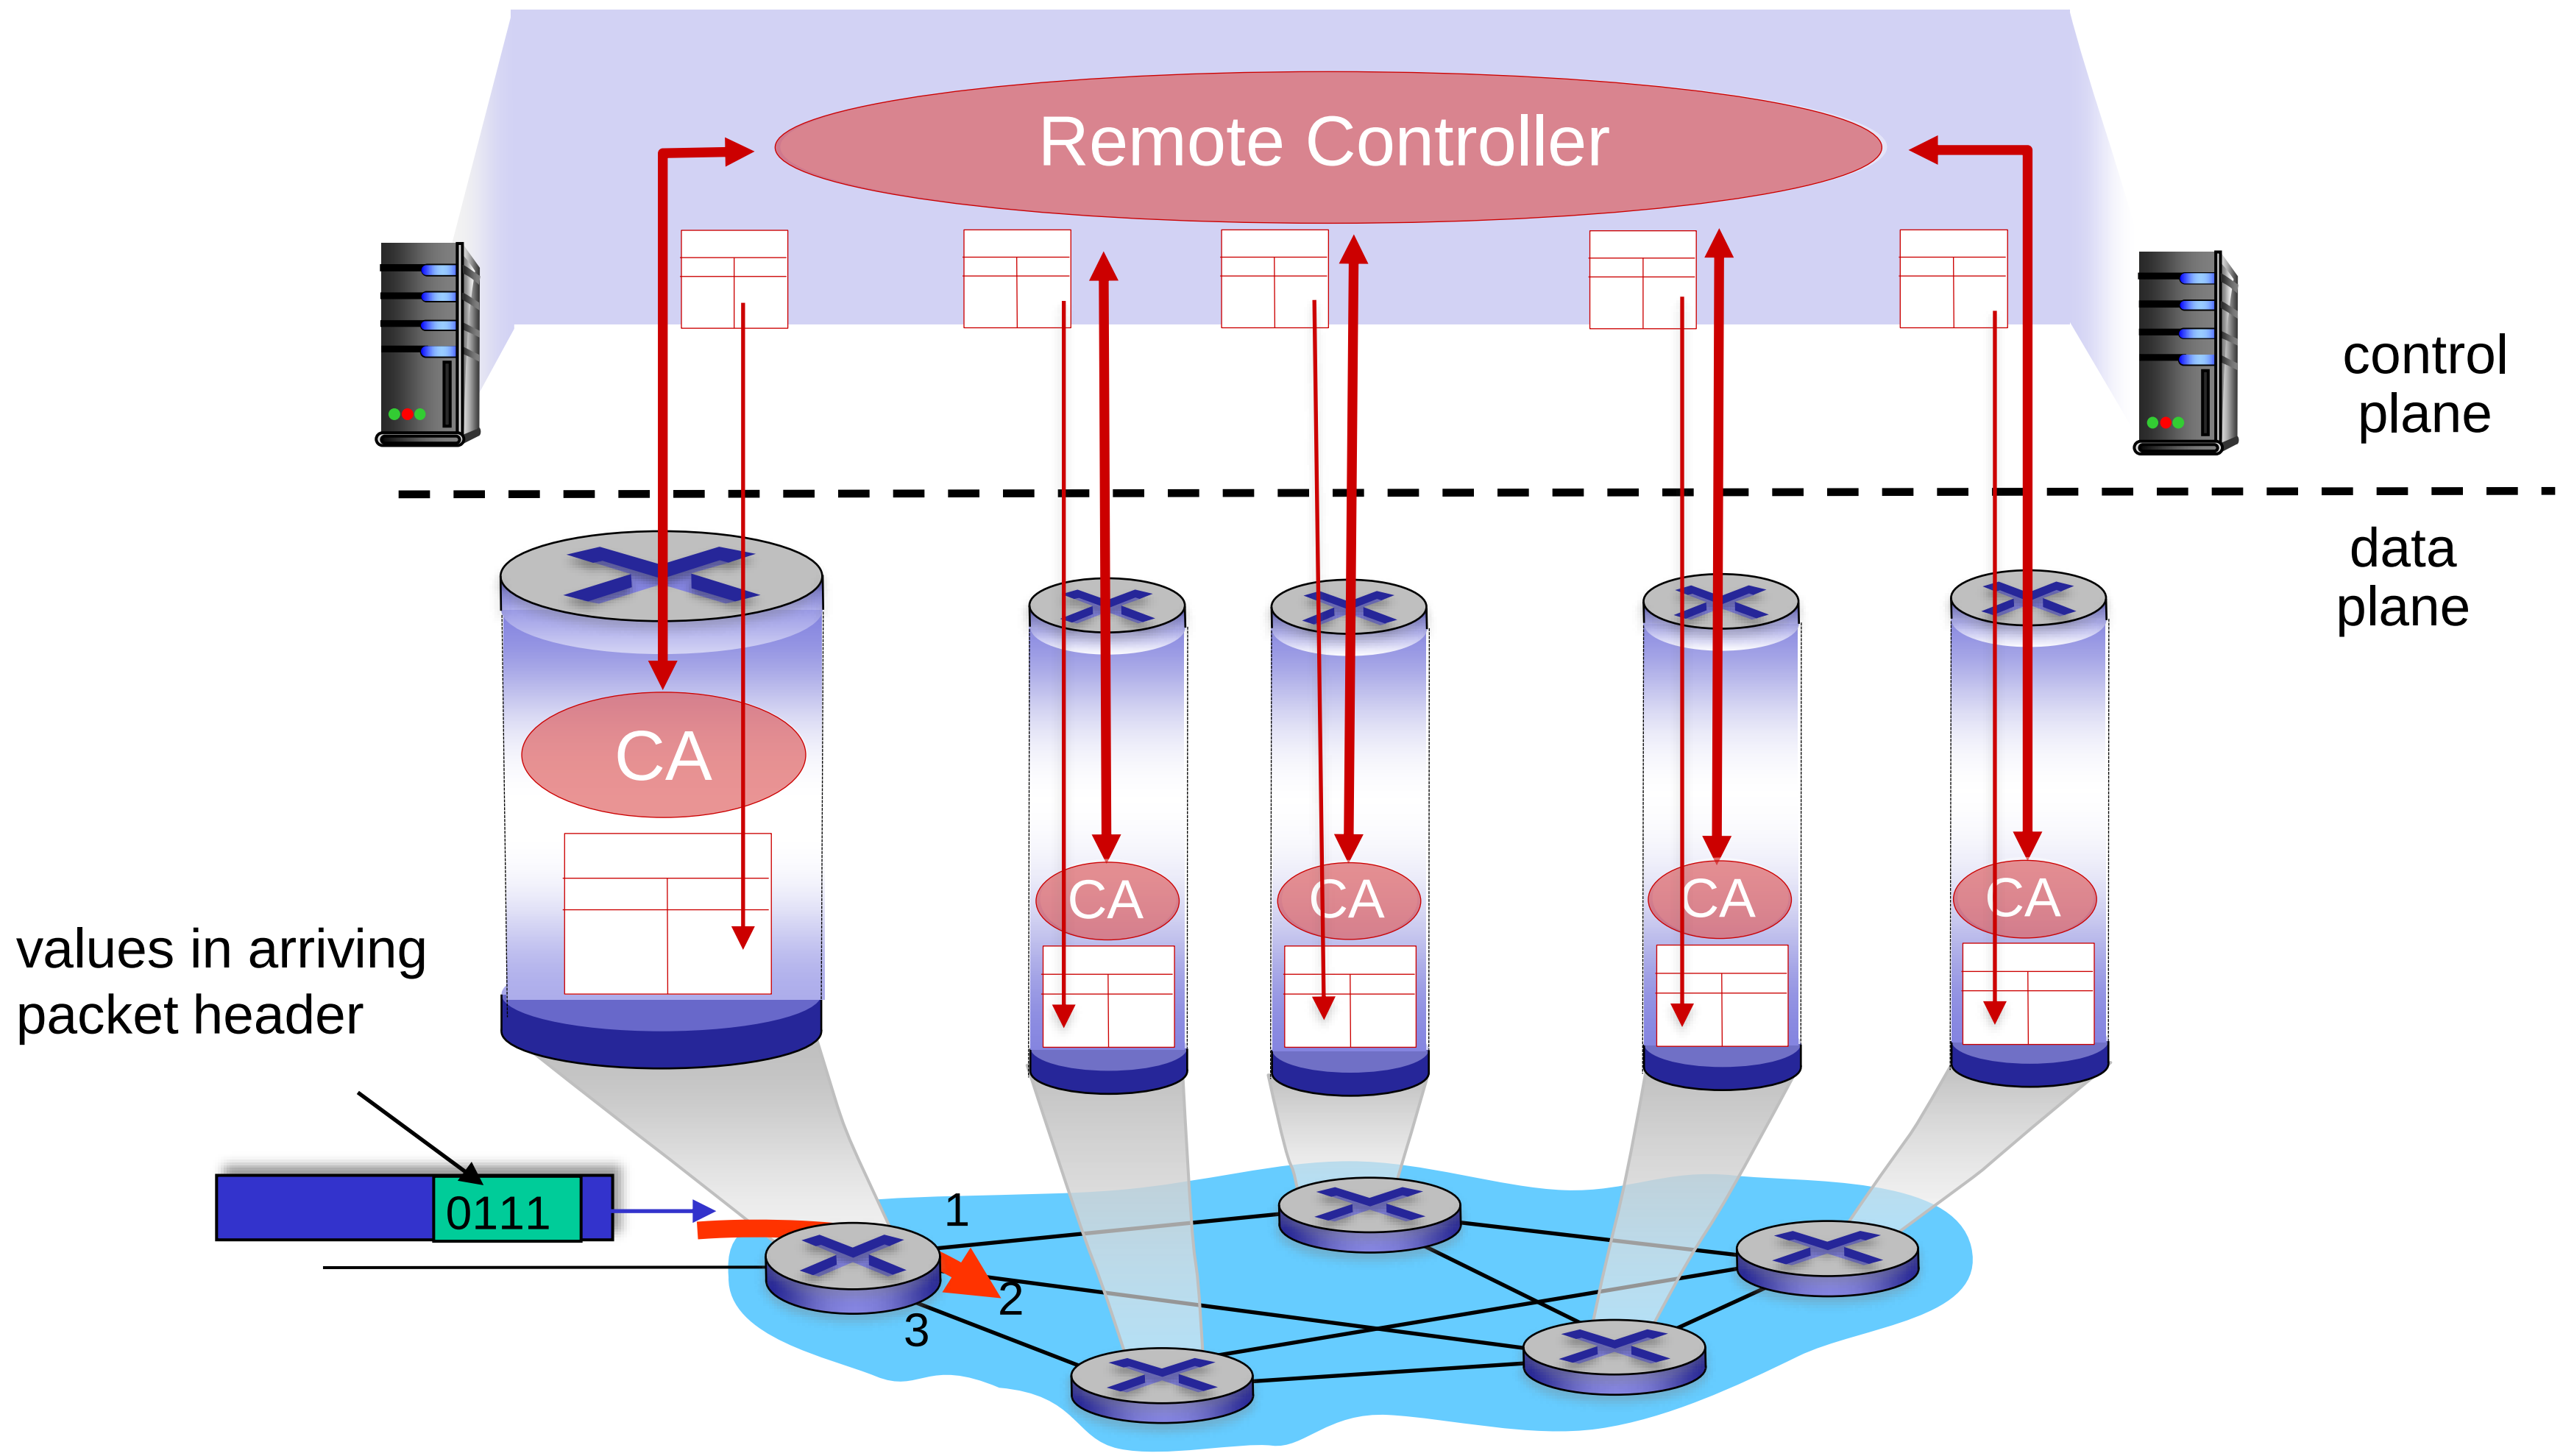

Network service model

Q: What *service model* for "channel" transporting datagrams from sender to receiver?

example services for *individual* datagrams:

- guaranteed delivery
- guaranteed delivery with less than 40 msec delay

example services for a *flow* of datagrams:

- in-order datagram delivery
- guaranteed minimum bandwidth to flow
- restrictions on changes in inter-packet spacing

Network-layer service model

Network Architecture	Service Model	Quality of Service (QoS) Guarantees ?			
		Bandwidth	Loss	Order	Timing
Internet	best effort	none	no	no	no

Internet "best effort" service model

No guarantees on*:*

i. successful datagram delivery to destination
ii. timing or order of delivery
iii. bandwidth available to end-end flow

Network-layer service model

Network Architecture	Service Model	Quality of Service (QoS) Guarantees ? Bandwidth	Loss	Order	Timing
Internet	best effort	none	no	no	no
ATM	Constant Bit Rate	Constant rate	yes	yes	yes
ATM	Available Bit Rate	Guaranteed min	no	yes	no
Internet	Intserv Guaranteed (RFC 1633)	yes	yes	yes	yes
Internet	Diffserv (RFC 2475)	possible	possibly	possibly	no

Reflections on best-effort service:

- simplicity of mechanism has allowed Internet to be widely deployed adopted
- sufficient provisioning of bandwidth allows performance of real-time applications (e.g., interactive voice, video) to be "good enough" for "most of the time"
- replicated, application-layer distributed services (datacenters, content distribution networks) connecting close to clients' networks, allow services to be provided from multiple locations
- congestion control of "elastic" services helps

It's hard to argue with success of best-effort service model

Destination-based forwarding

forwarding table

Destination Address Range	Link Interface
11001000 00010111 00010000 00000000 through 11001000 00010111 00010111 11111111	0
11001000 00010111 00011000 00000000 through 11001000 00010111 00011000 11111111	1
11001000 00010111 00011001 00000000 through 11001000 00010111 00011111 11111111	2
otherwise	3

Q: but what happens if ranges don't divide up so nicely?

Longest prefix matching

longest prefix match

when looking for forwarding table entry for given destination address, use *longest* address prefix that matches destination address.

Destination Address Range				Link interface
11001000	00010111	00010***	********	0
11001000	00010111	00011000	********	1
11001000	00010111	00011***	********	2
otherwise				3

examples:

11001000 00010111 00010110 10100001 which interface?

11001000 00010111 00011000 10101010 which interface?

Longest prefix matching

longest prefix match

when looking for forwarding table entry for given destination address, use *longest* address prefix that matches destination address.

Destination Address Range	Link interface
11001000 00010111 00010*** ********	0
11001000 00010111 00011000 ********	1
11001000 00010111 00011*** ********	2
otherwise	3

match!

examples:

11001000 00010111 00010110 10100001 which interface?

11001000 00010111 00011000 10101010 which interface?

Longest prefix matching

longest prefix match

when looking for forwarding table entry for given destination address, use *longest* address prefix that matches destination address.

Destination Address Range	Link interface
11001000 00010111 00010*** ********	0
11001000 00010111 00011000 ********	1
11001000 00010111 00011*** ********	2
otherwise	3

match!

exa ple

11001000 00010111 00010110 10100001 which interface?

11001000 00010111 00011000 10101010 which interface?

Longest prefix matching

longest prefix match

when looking for forwarding table entry for given destination address, use *longest* address prefix that matches destination address.

Destination Address Range	Link interface
11001000 00010111 00010*** ********	0
11001000 00010111 00011000 ********	1
11001000 00010111 00011*** ********	2
otherwise	3

match!

examples:

11001000 00010111 00010110 10100001 which interface?

11001000 00010111 00011000 10101010 which interface?

Longest prefix matching

- we'll see *why* longest prefix matching is used shortly, when we study addressing
- longest prefix matching: often performed using ternary content addressable memories (TCAMs)
  - *content addressable:* present address to TCAM: retrieve address in one clock cycle, regardless of table size
  - Cisco Catalyst: ~1M routing table entries in TCAM

Sidebar: Network Neutrality

What is network neutrality?

- *technical:* how an ISP should share/allocation its resources
  - packet scheduling, buffer management are the *mechanisms*
- *social, economic* principles
  - protecting free speech
  - encouraging innovation, competition
- enforced *legal* rules and policies

Different countries have different "takes" on network neutrality

Sidebar: Network Neutrality

2015 US FCC *Order on Protecting and Promoting an Open Internet:* three "clear, bright line" rules:

- no blocking … "shall not block lawful content, applications, services, or non-harmful devices, subject to reasonable network management."
- no throttling … "shall not impair or degrade lawful Internet traffic on the basis of Internet content, application, or service, or use of a non-harmful device, subject to reasonable network management."
- no paid prioritization. … "shall not engage in paid prioritization"

Network Layer: Internet

host, router network layer functions:

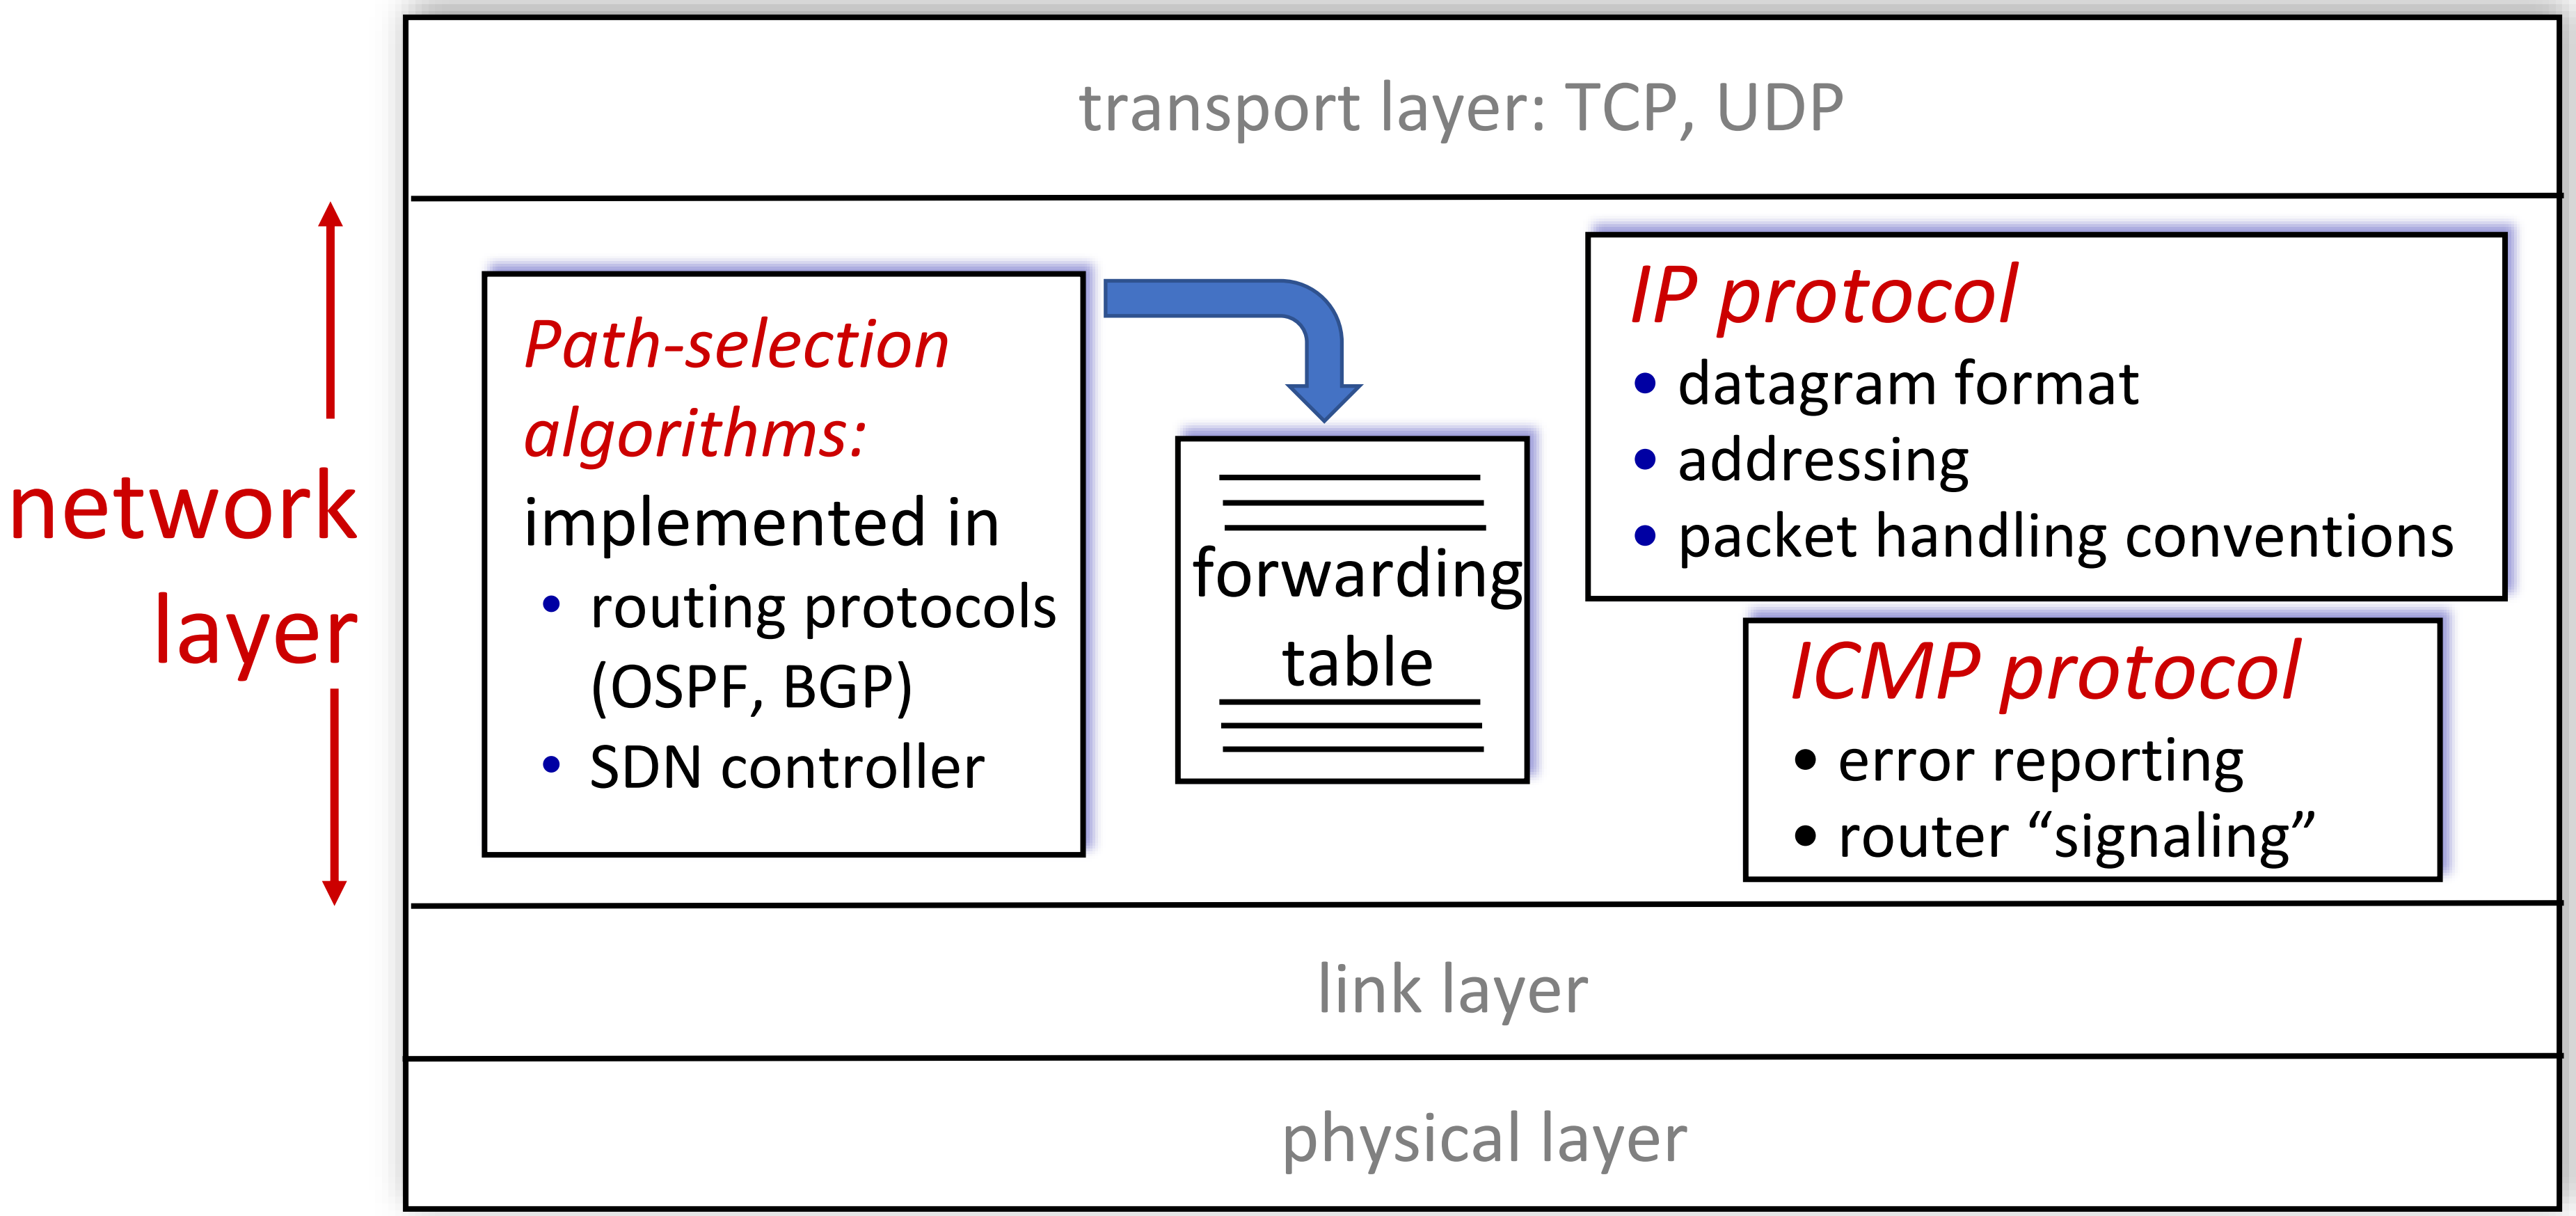

IP Datagram format

IP protocol version number

header length([redacted])

"type" of service:
- diffserv (0:5)
- ECN (6:7)

TTL: remaining max hops
(decremented at each router)

upper layer protocol (e.g., TCP or UDP)

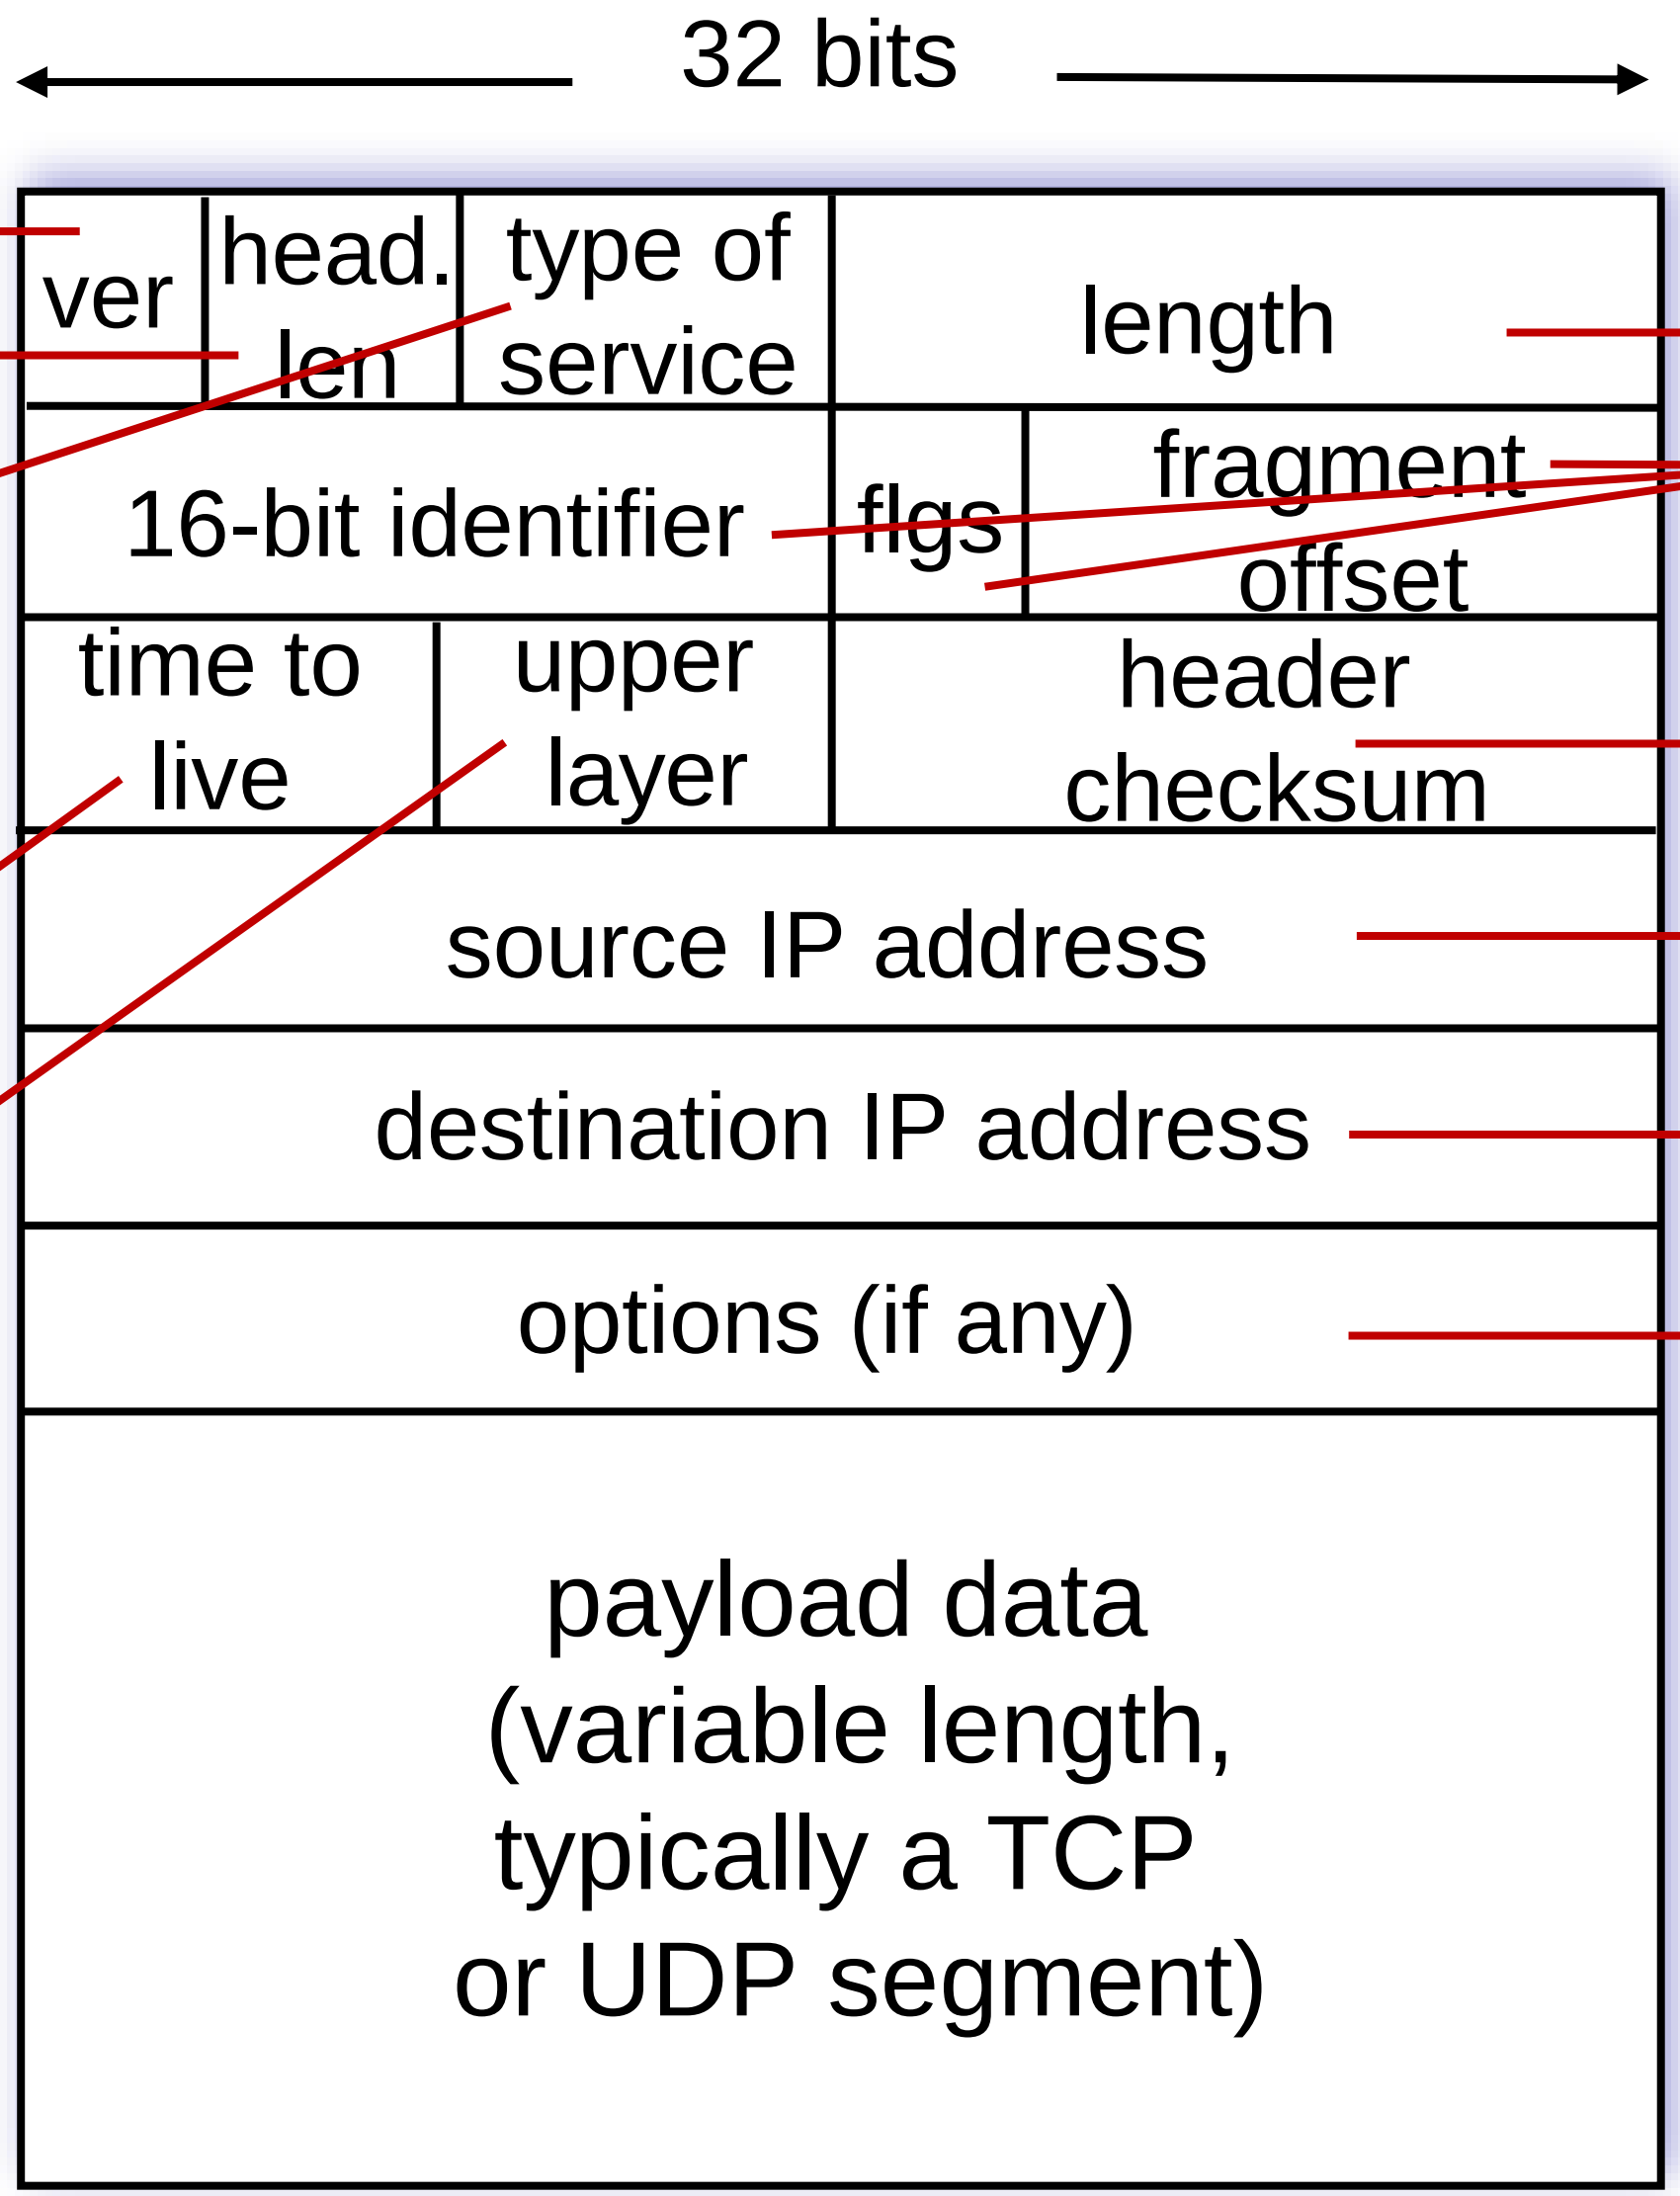

total datagram length (bytes)

fragmentation/ reassembly

header checksum

32-bit source IP address

Maximum length: 64K bytes
Typically: 1500 bytes or less

e.g., timestamp, record route taken

overhead
- 20 bytes of TCP
- 20 bytes of IP
- = 40 bytes + app layer overhead for TCP+IP

IP addressing: introduction

- IP address: 32-bit identifier associated with each host or router *interface*
- interface: connection between host/router and physical link
  - router's typically have multiple interfaces
  - host typically has one or two interfaces (e.g., wired Ethernet, wireless 802.11)

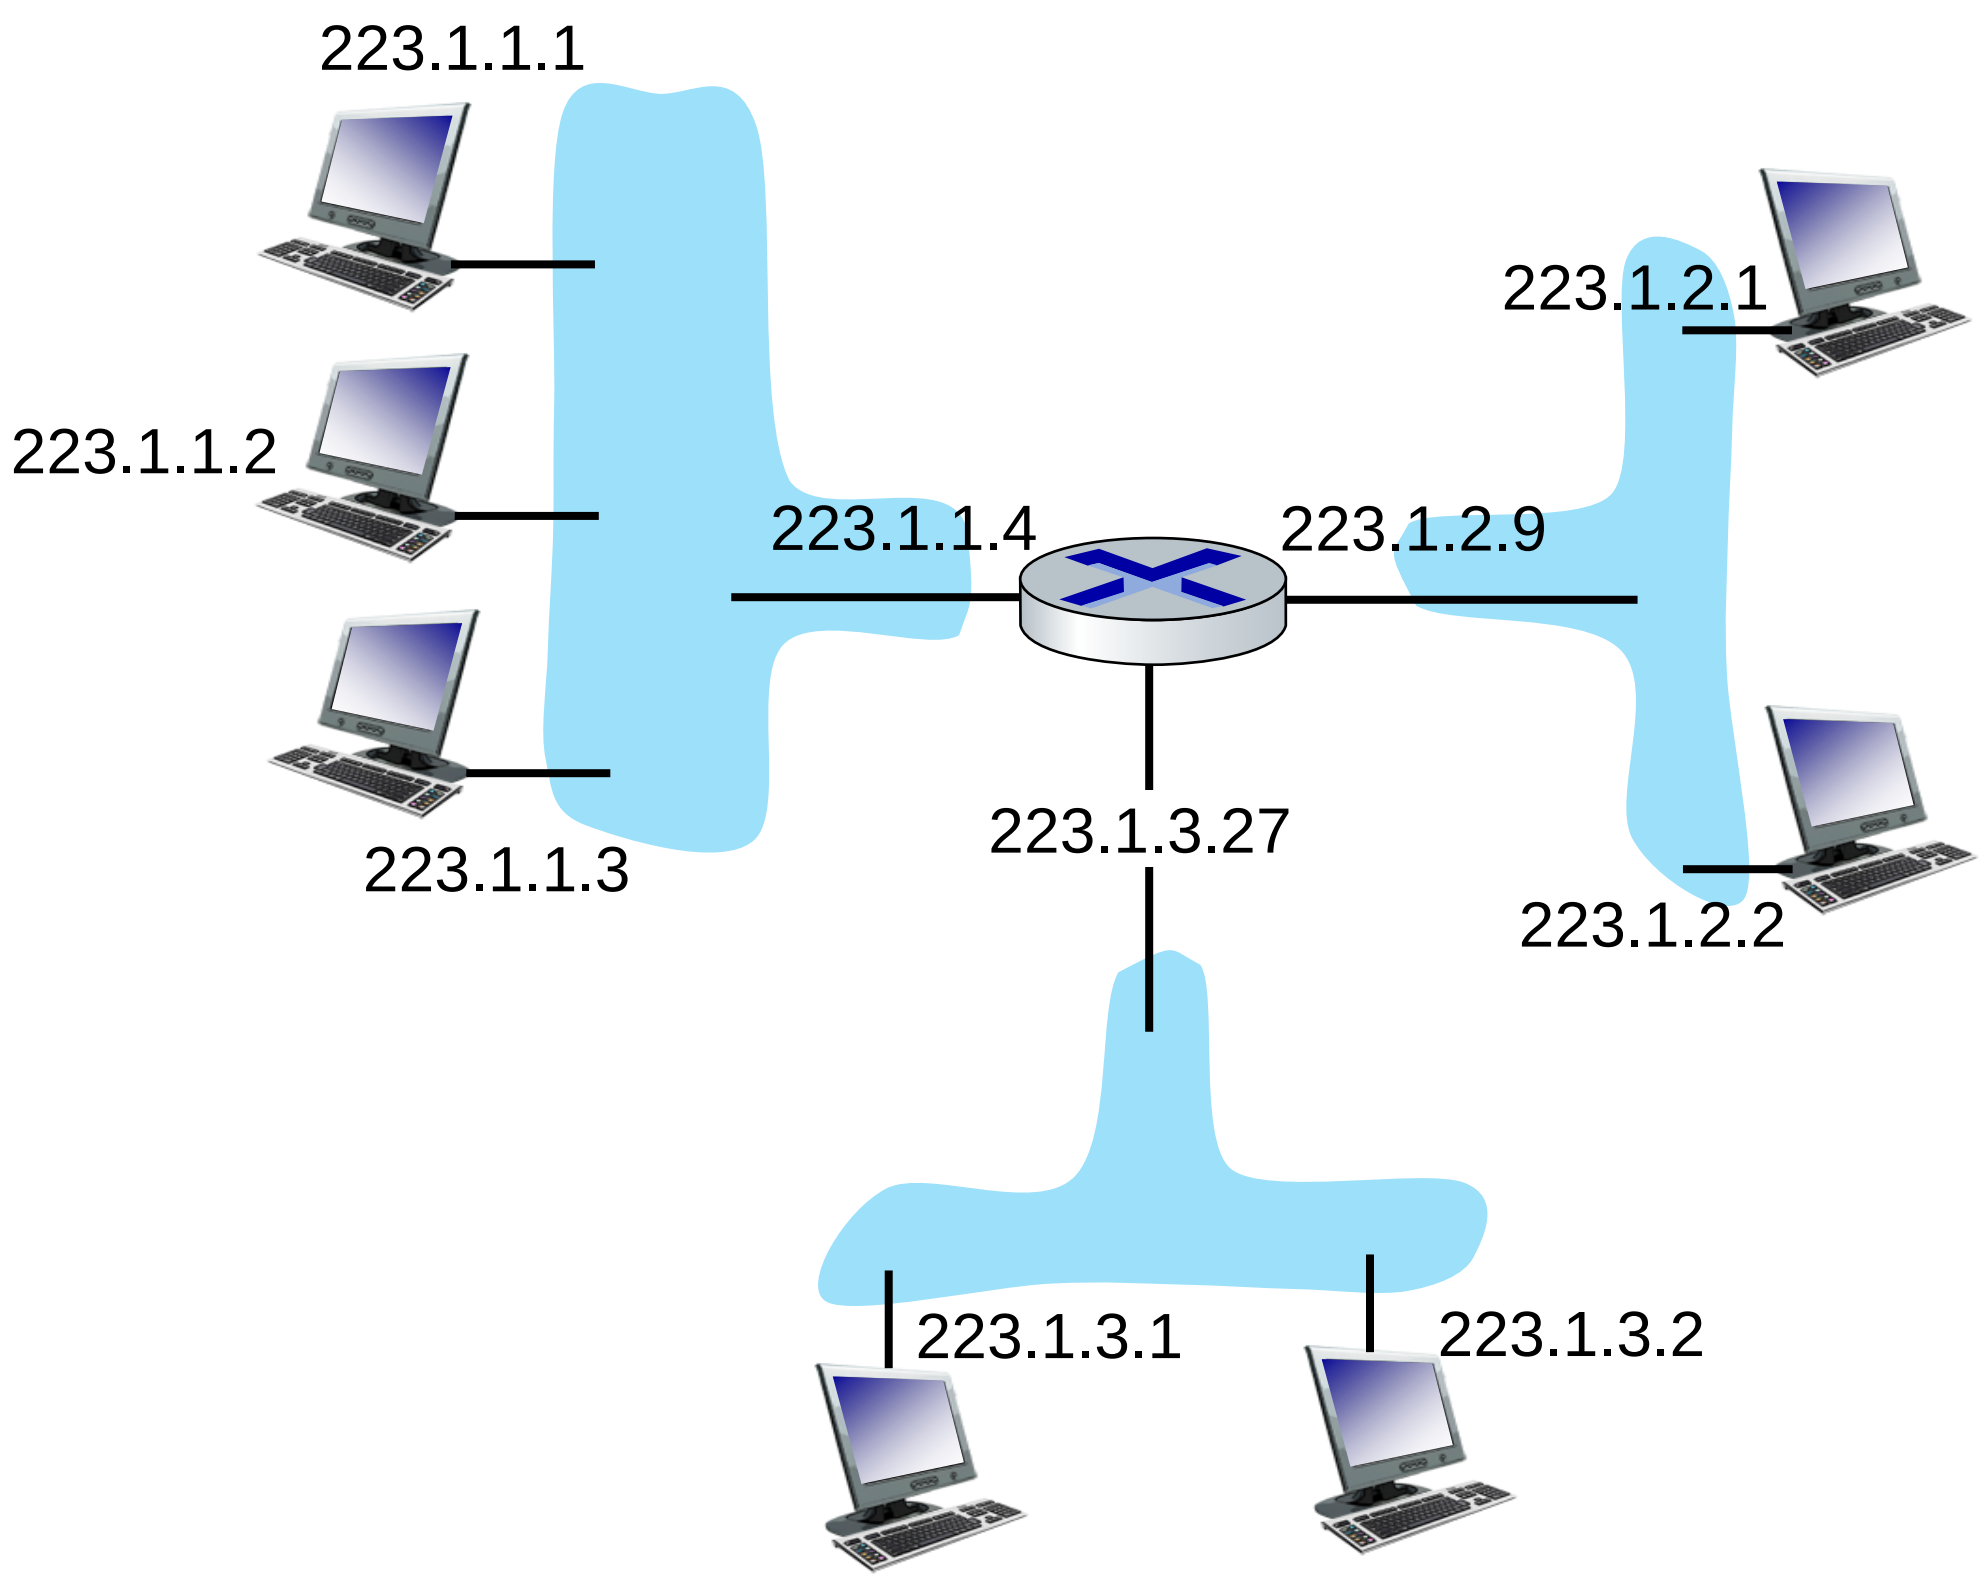

dotted-decimal IP address notation:

$$223.1.1.1 = \underbrace{11011111}_{223}\ \underbrace{00000001}_{1}\ \underbrace{00000001}_{1}\ \underbrace{00000001}_{1}$$

Subnets

- *What's a subnet ?*
  - device interfaces that can physically reach each other without passing through an intervening router
- IP addresses have structure:
  - subnet part: devices in same subnet have common high order bits
  - host part: remaining low order bits

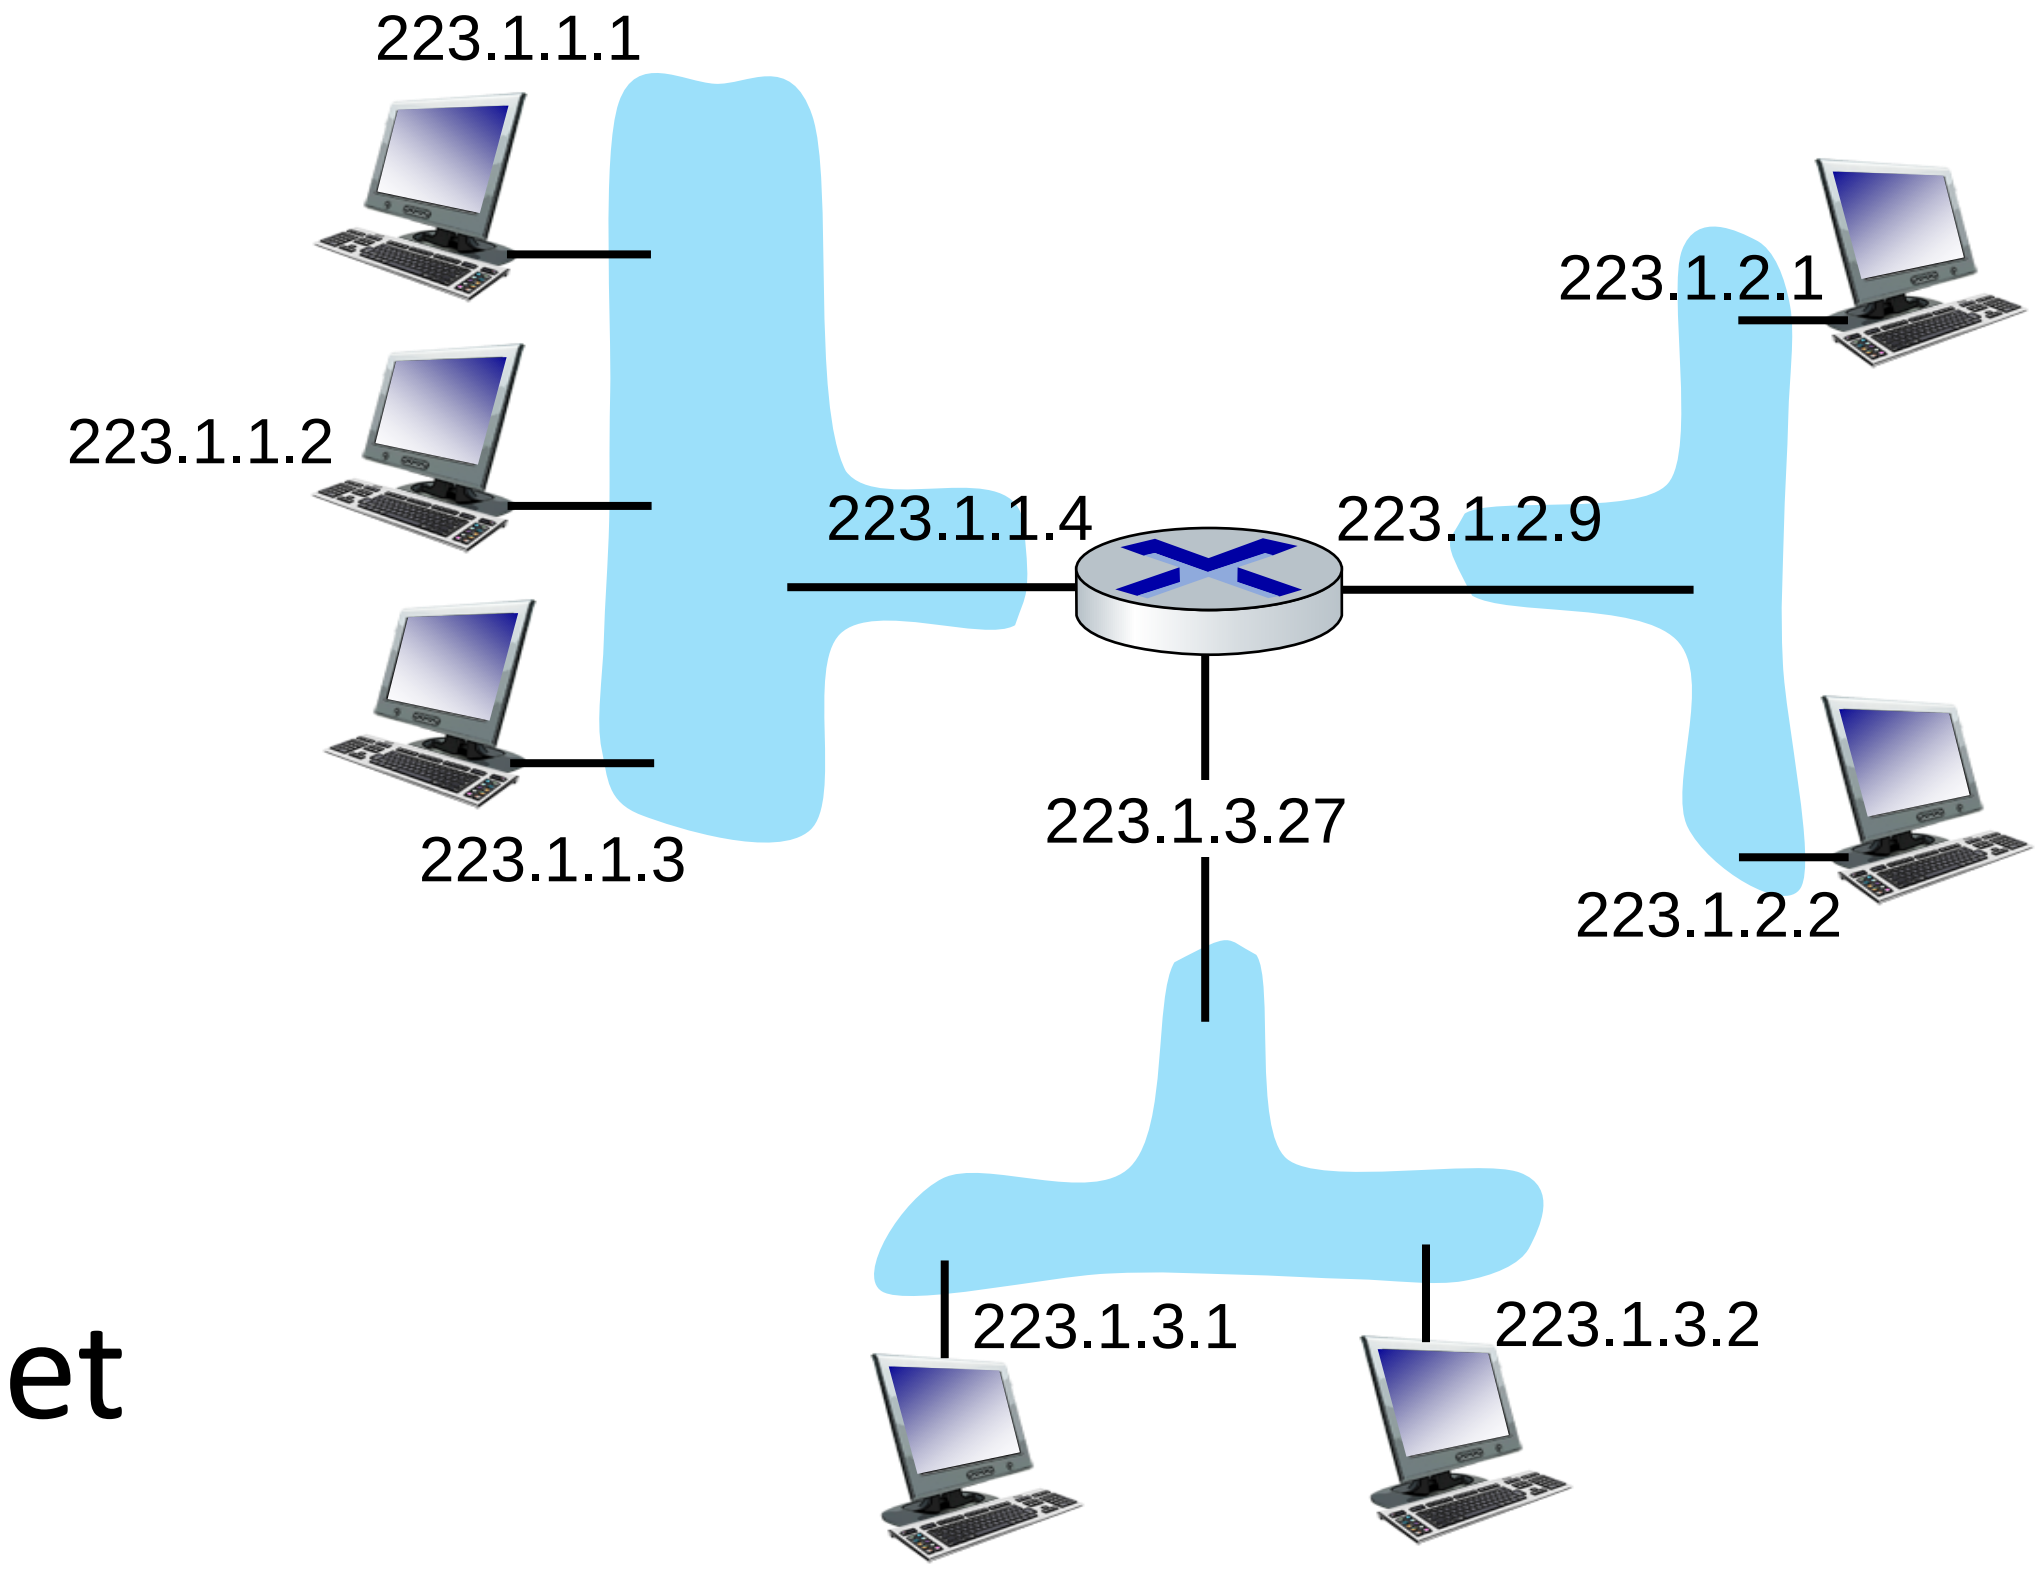

network consisting of 3 subnets

Subnets

Recipe for defining subnets:

- detach each interface from its host or router, creating "islands" of isolated networks
- each isolated network is called a *subnet*

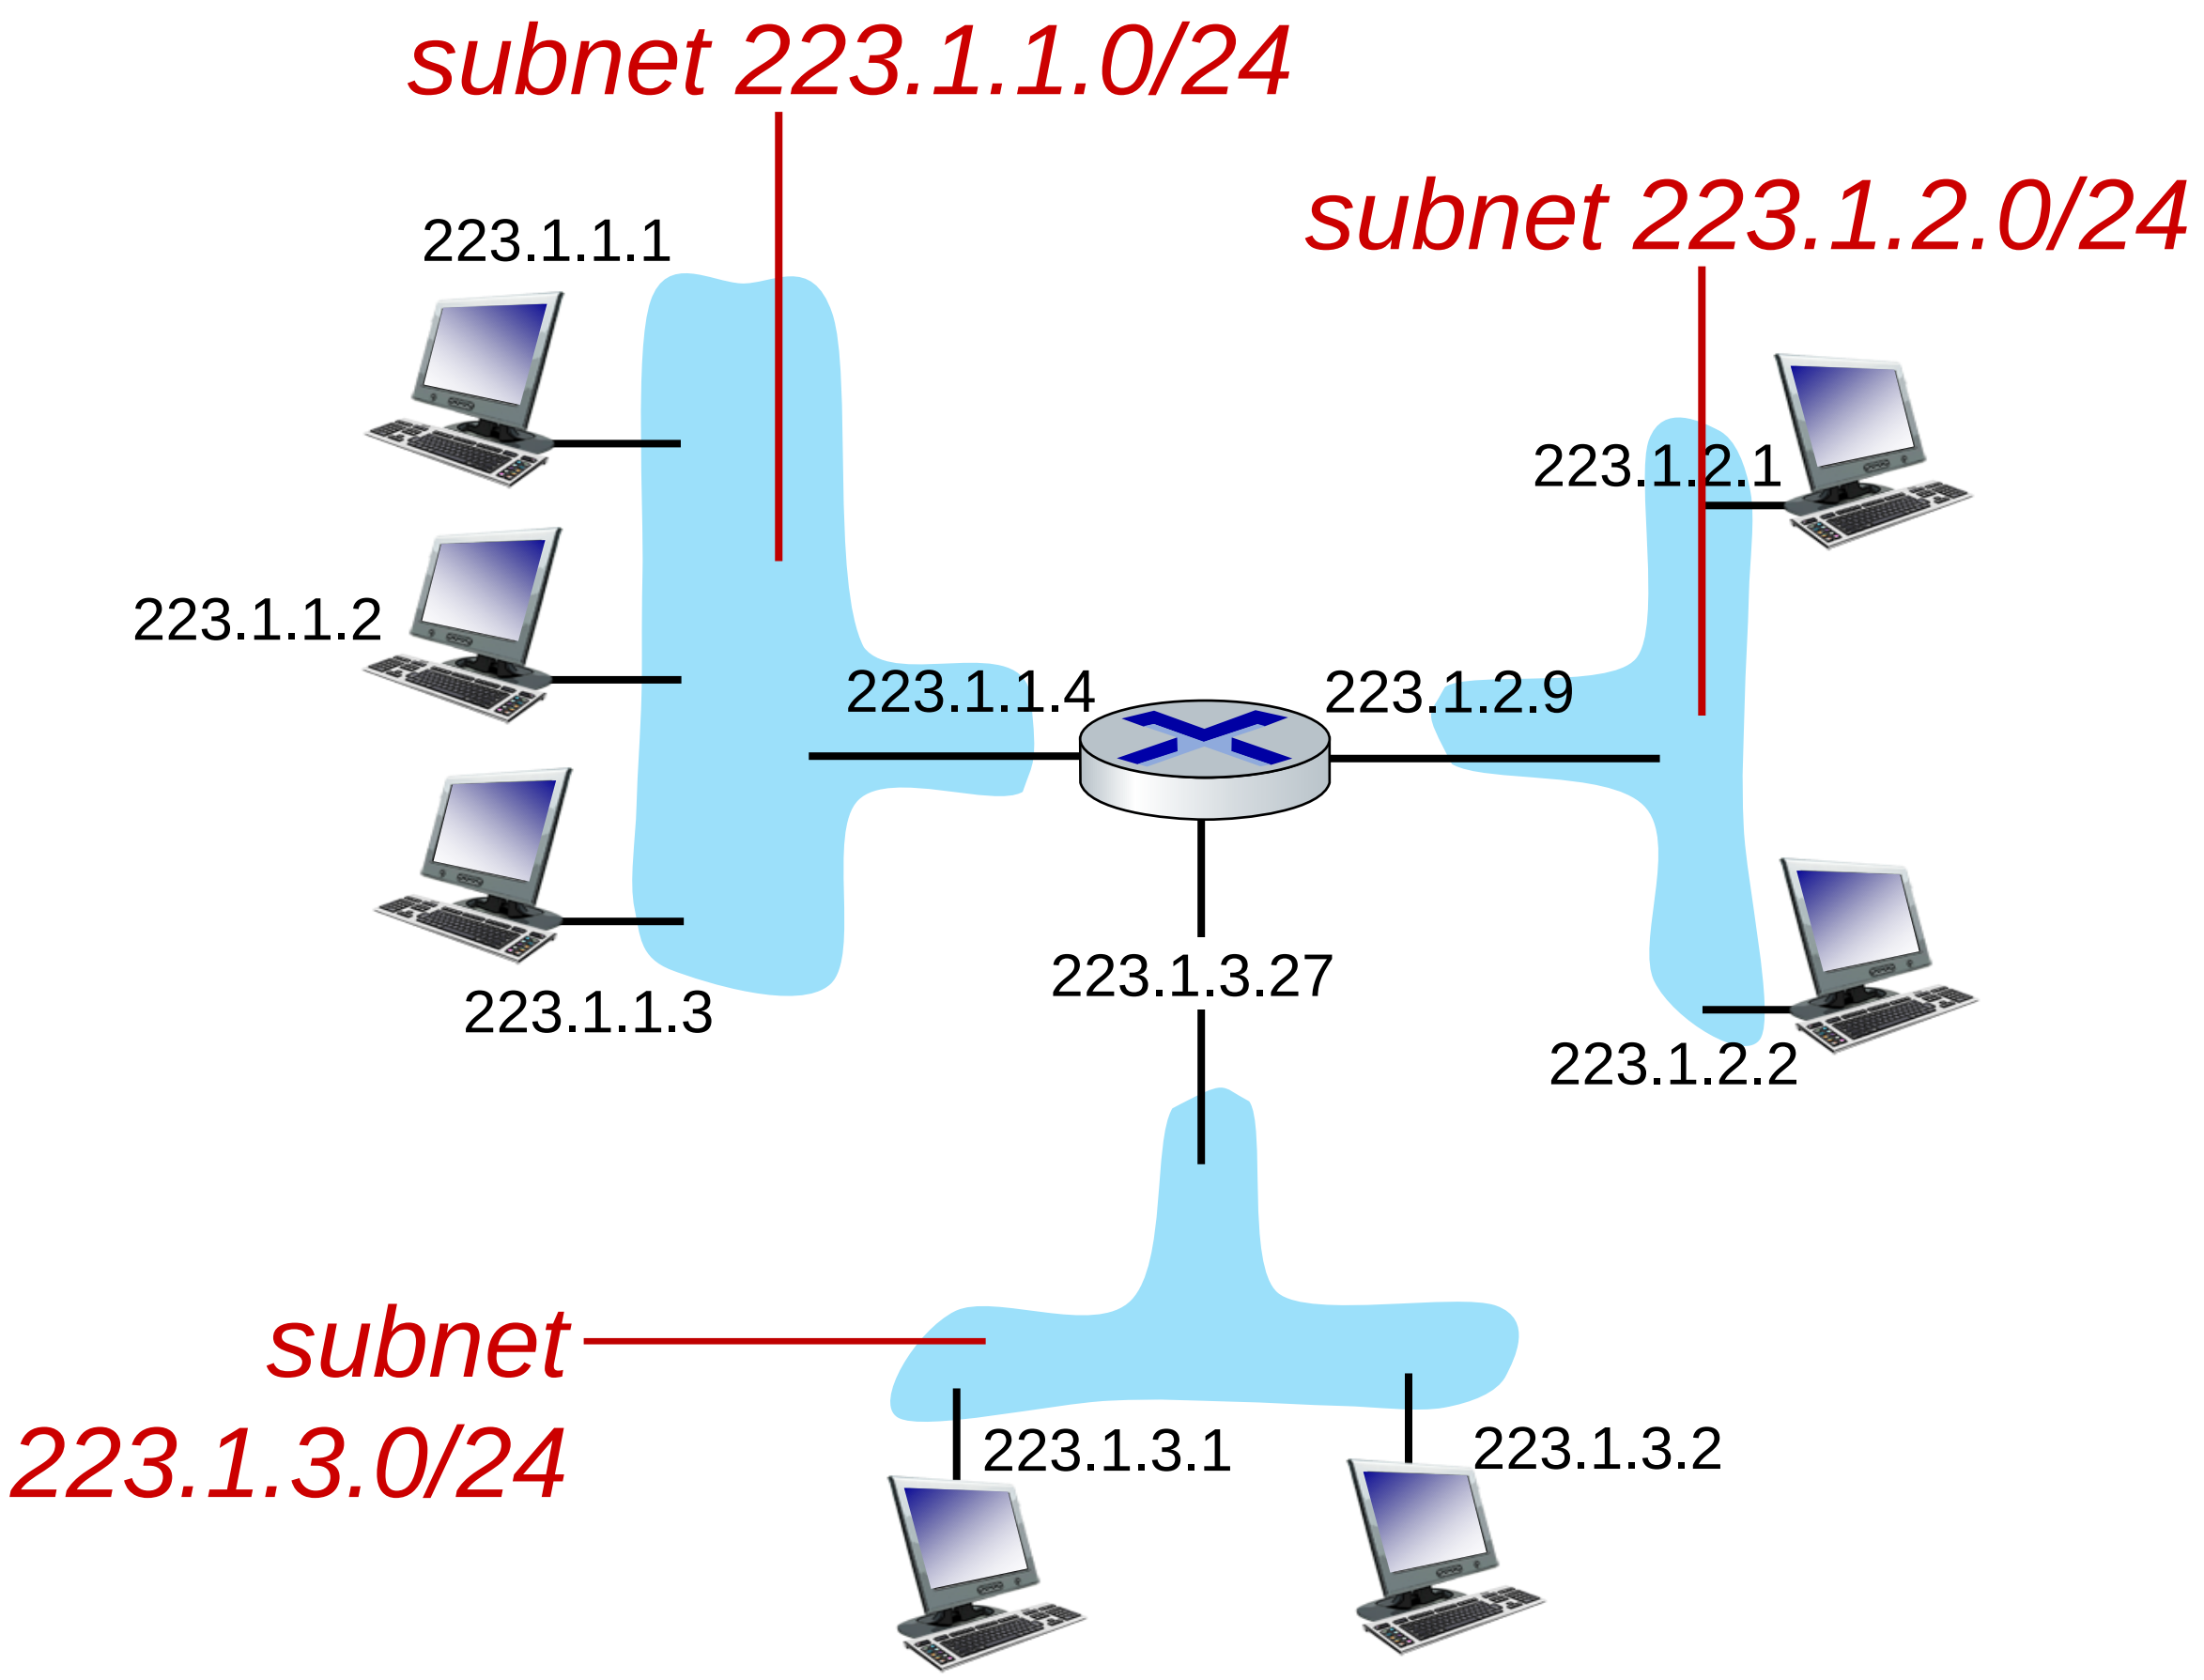

subnet mask: /24
(high-order 24 bits: subnet part of IP address)

Subnets

- where are the subnets?
- what are the /24 subnet addresses?

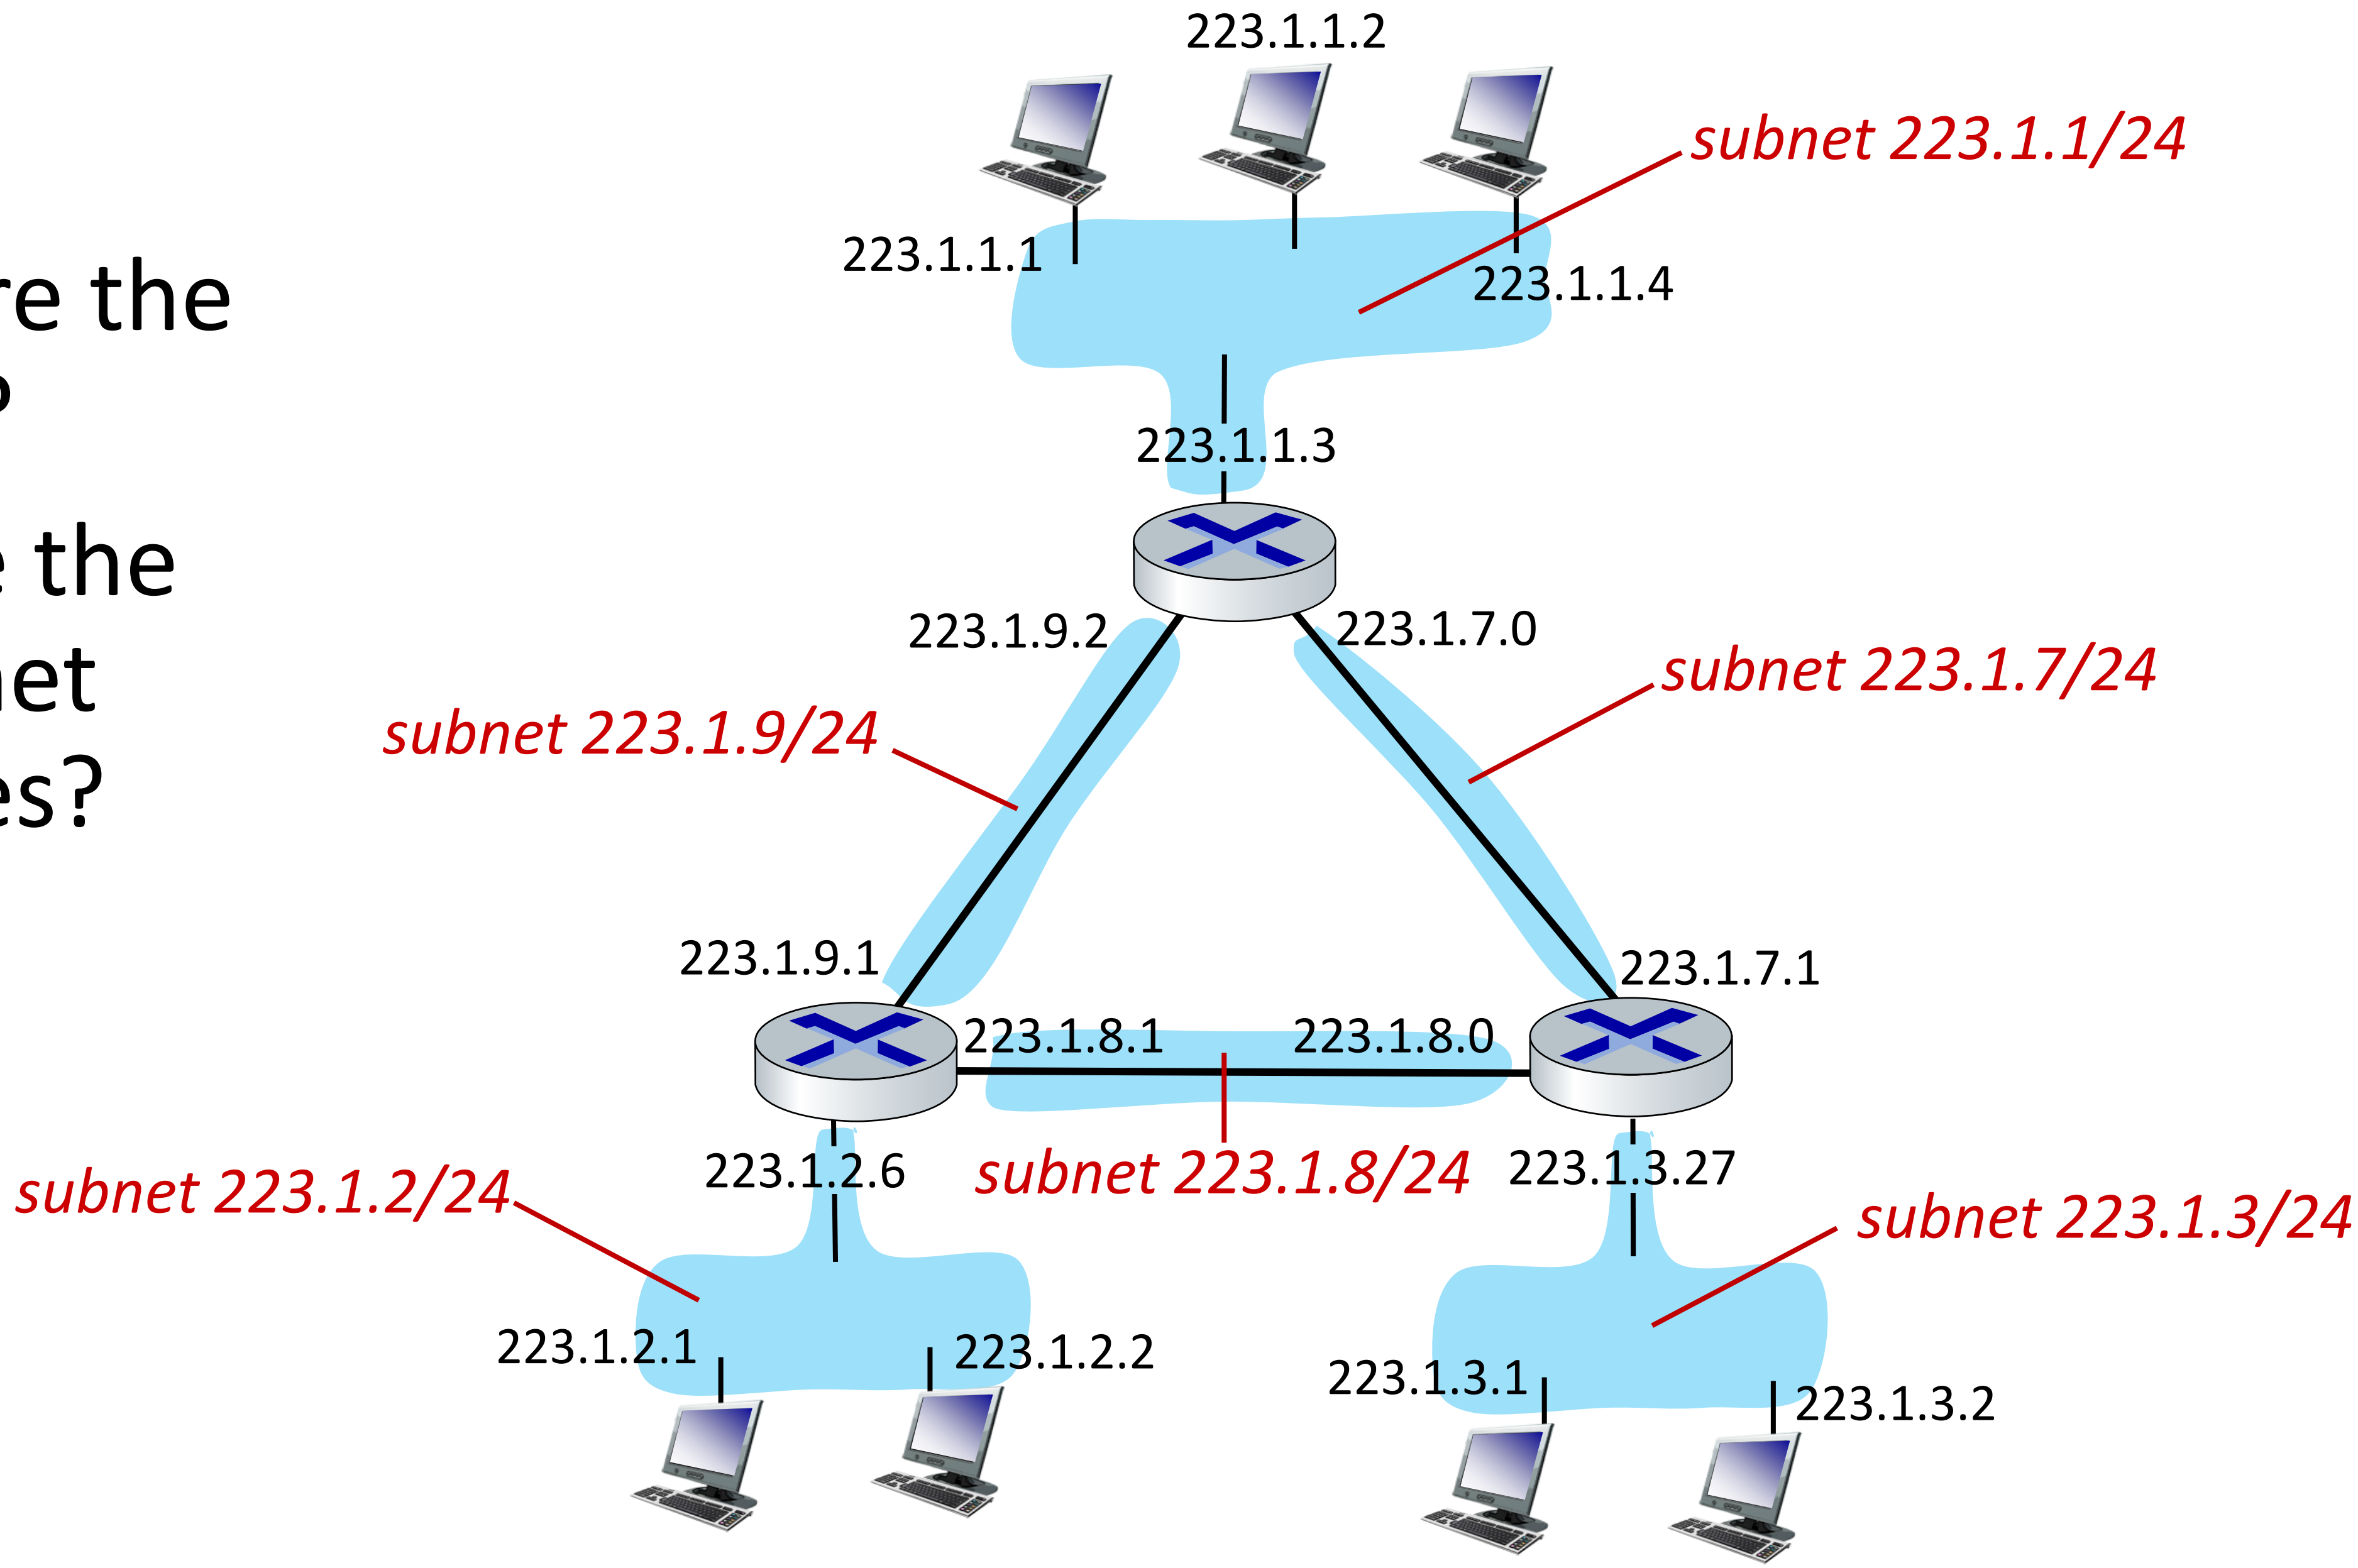

IP addressing: CIDR

CIDR: Classless InterDomain Routing (pronounced “cider”)

- subnet portion of address of arbitrary length
- address format: a.b.c.d/x, where x is # bits in subnet portion of address

subnet part | host part

11001000 00010111 00010000 00000000

200.23.16.0/23

IP addresses: how to get one?

That’s actually two questions:

1. Q: How does a *host* get IP address within its network (host part of address)?
2. Q: How does a *network* get IP address for itself (network part of address)

How does *host* get IP address?

- hard-coded by sysadmin in config file (e.g., /etc/rc.config in UNIX)
- DHCP: Dynamic Host Configuration Protocol: dynamically get address from as server
  - “plug-and-play”

DHCP: Dynamic Host Configuration Protocol

goal: host *dynamically* obtains IP address from network server when it "joins" network

- can renew its lease on address in use
- allows reuse of addresses (only hold address while connected/on)
- support for mobile users who join/leave network

DHCP overview:

- host broadcasts DHCP discover msg [optional]
- DHCP server responds with DHCP offer msg [optional]
- host requests IP address: DHCP request msg
- DHCP server sends address: DHCP ack msg

DHCP client-server scenario

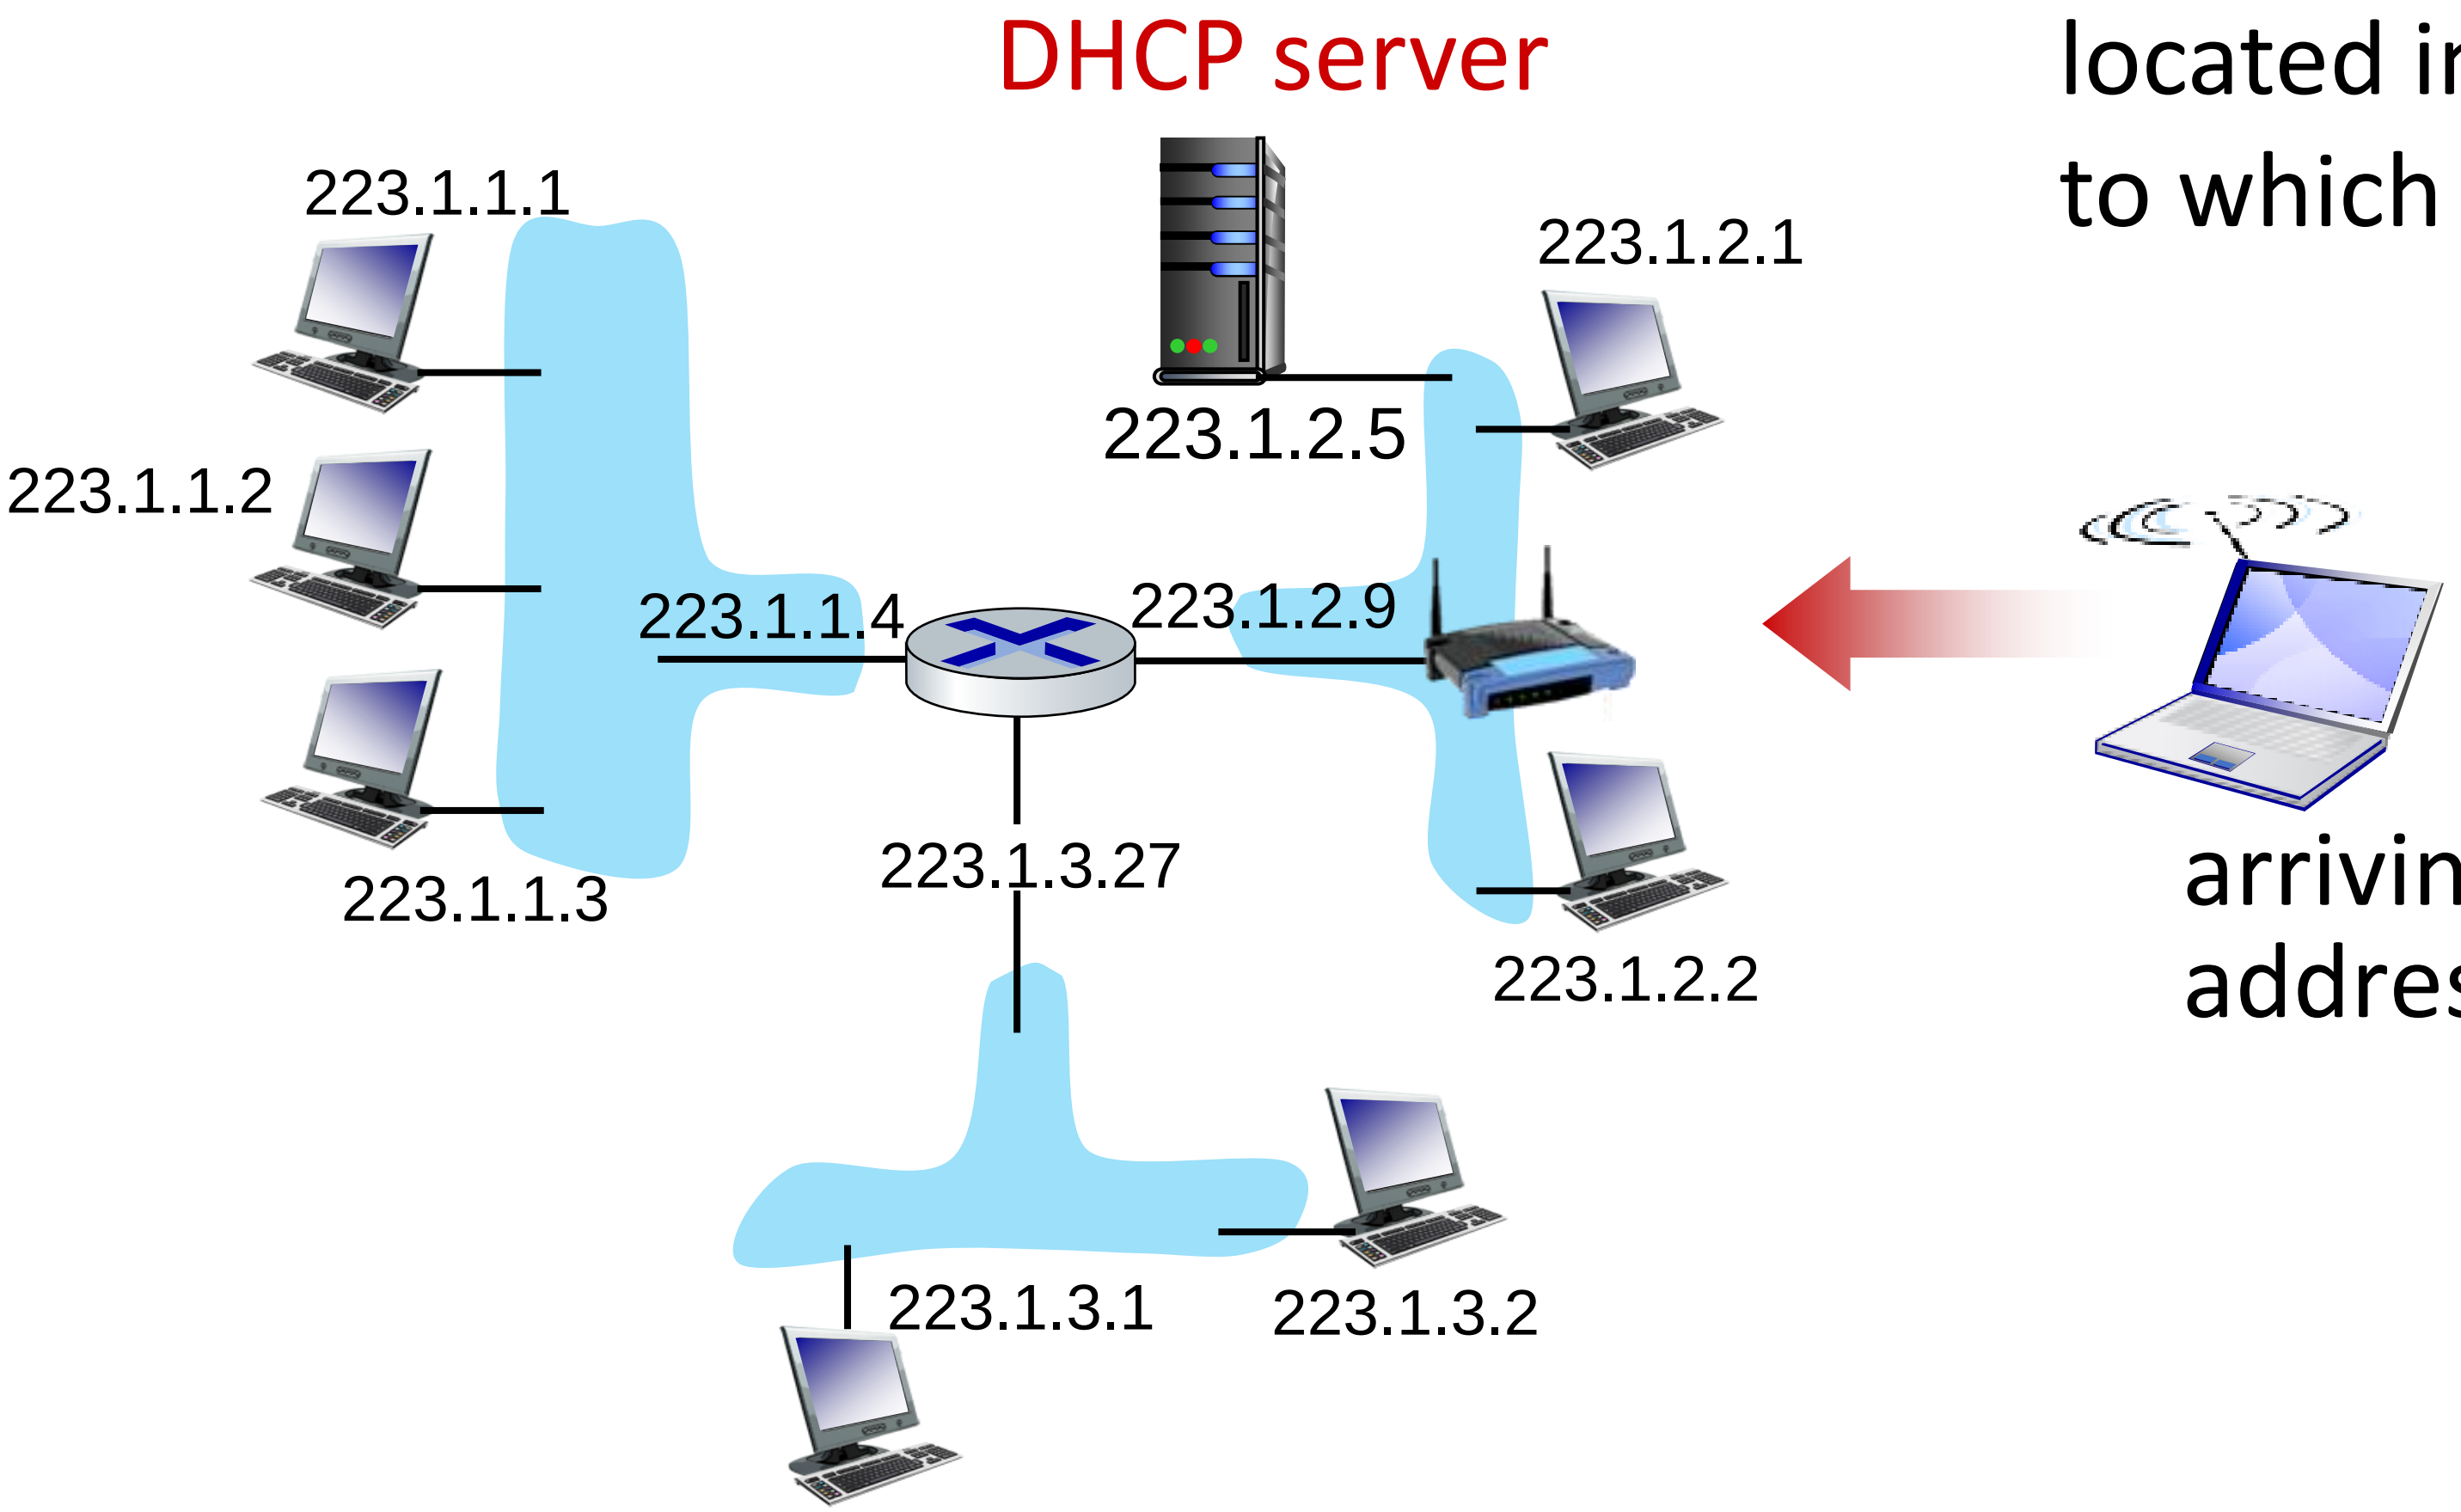

Typically, DHCP server will be co-located in router, serving all subnets to which router is attached

arriving DHCP client needs address in this network

DHCP client-server scenario

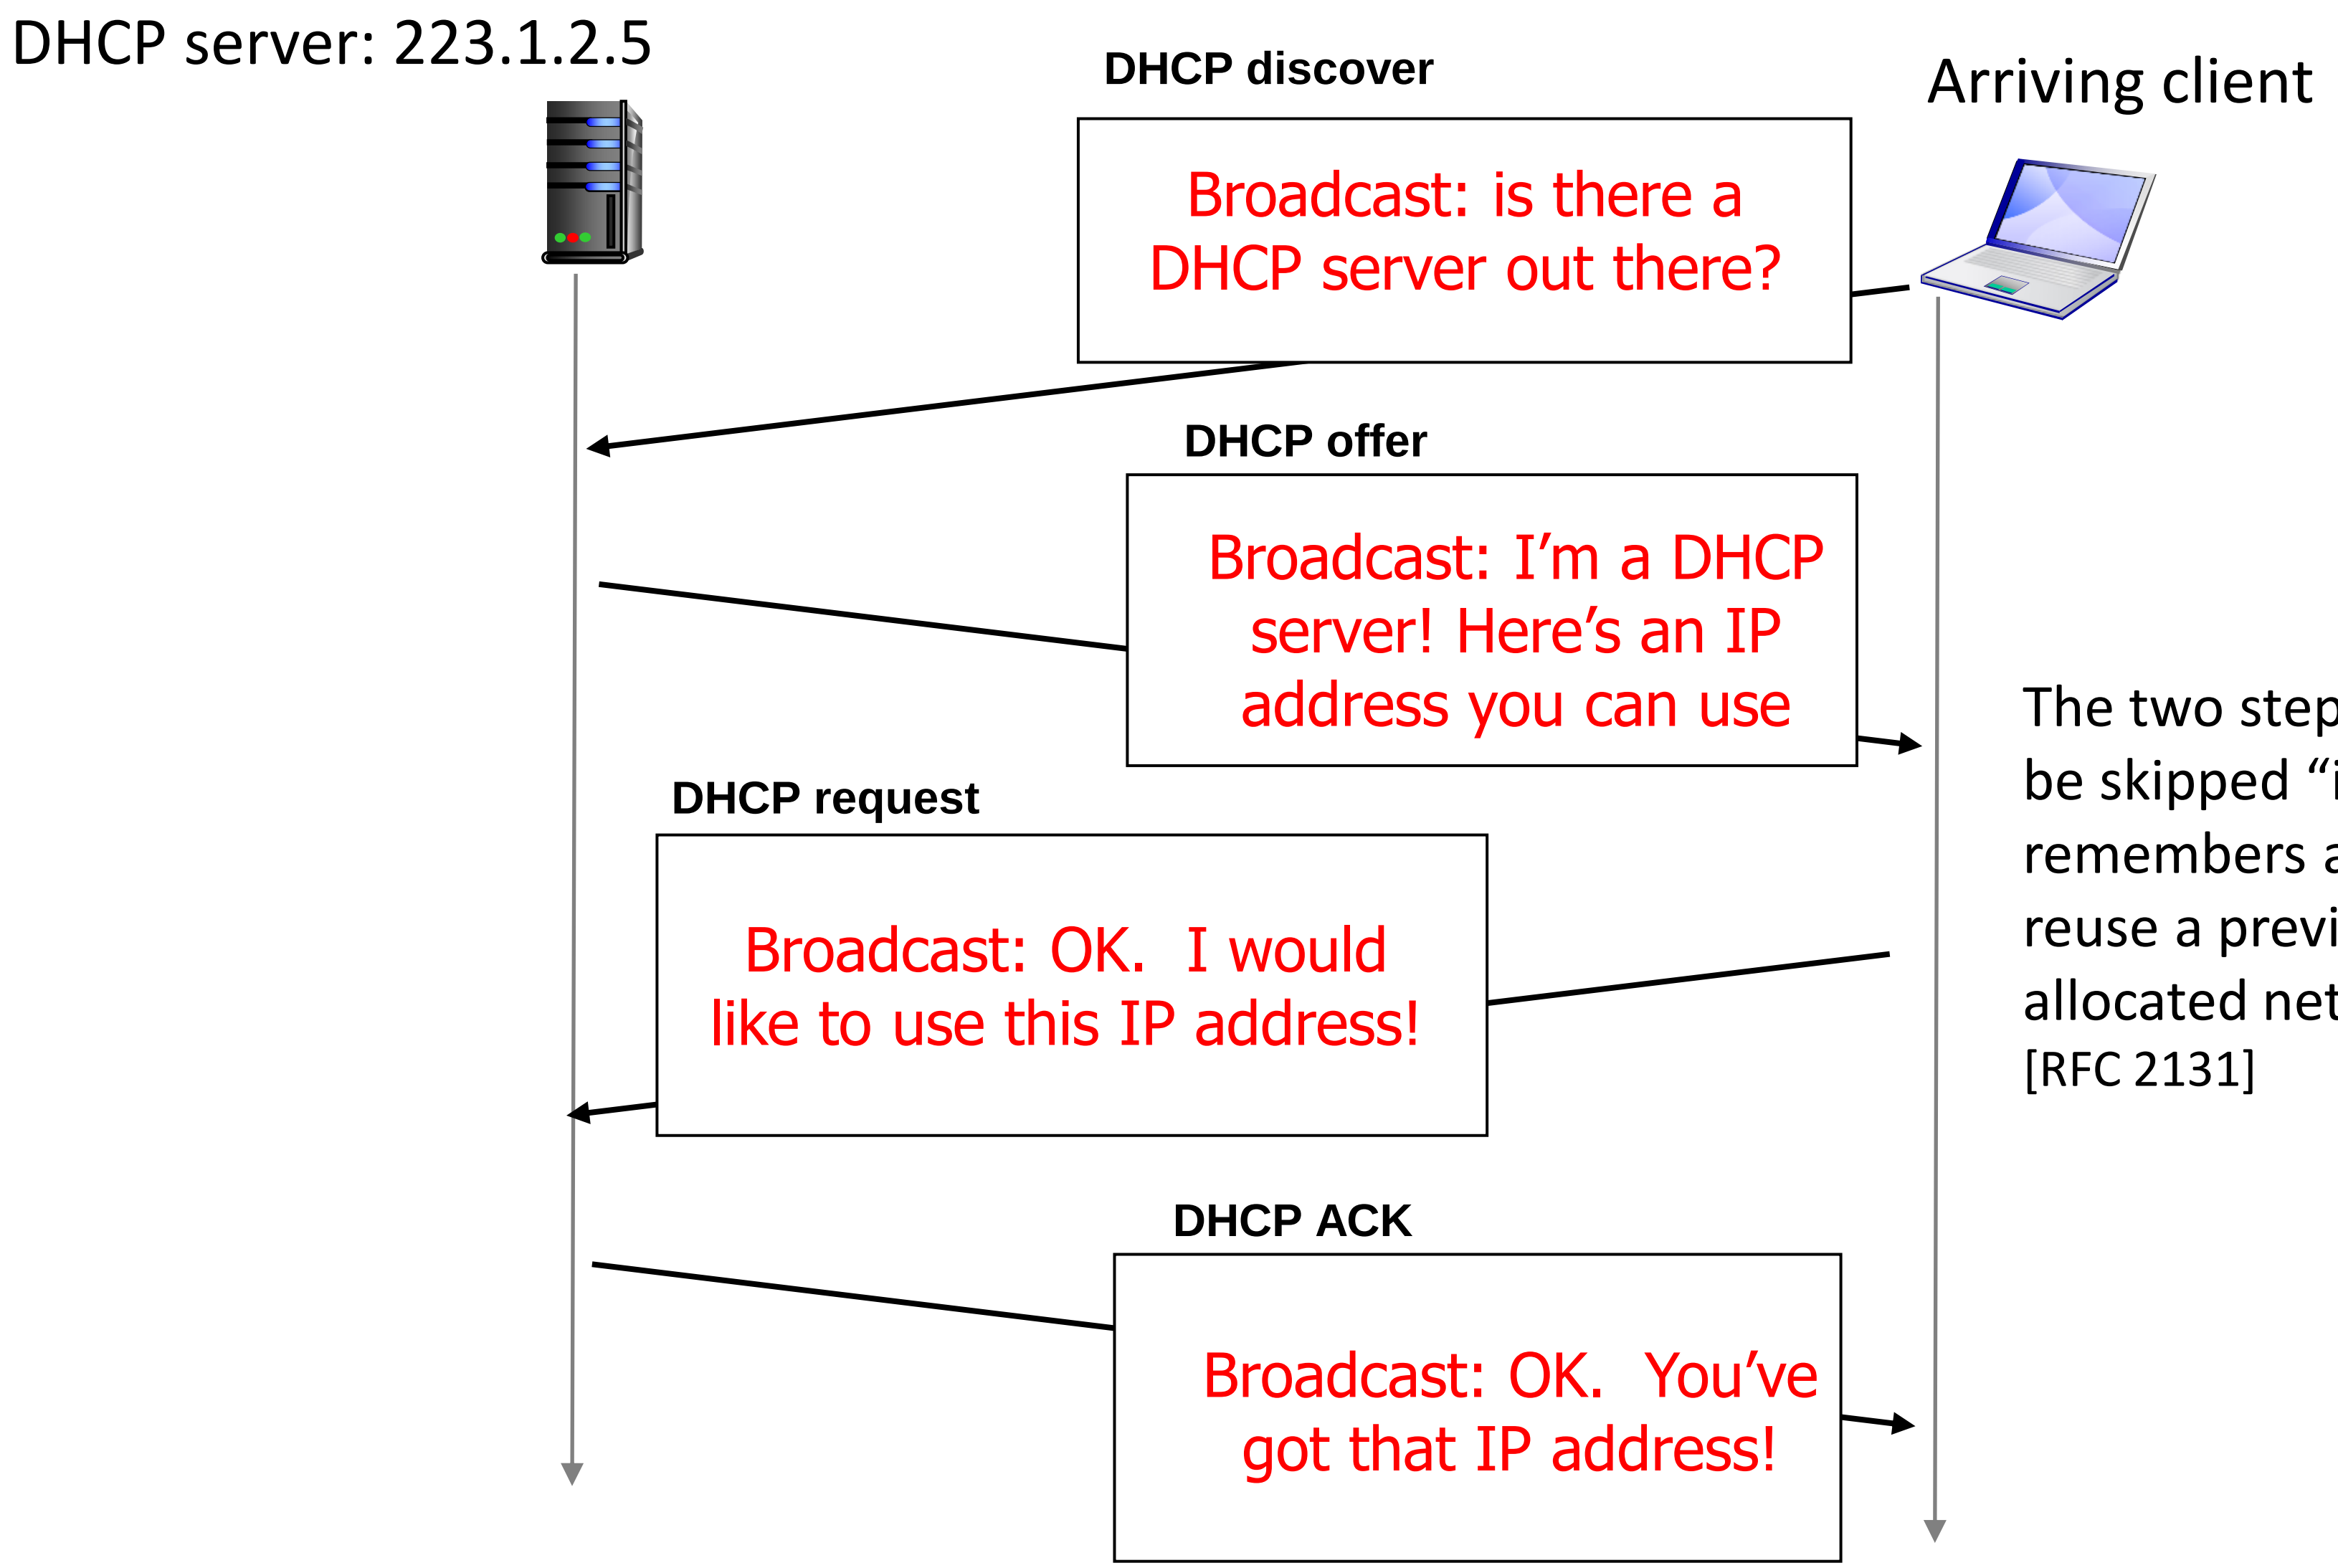

The two steps above can be skipped "if a client remembers and wishes to reuse a previously allocated network address" [RFC 2131]

DHCP client-server scenario

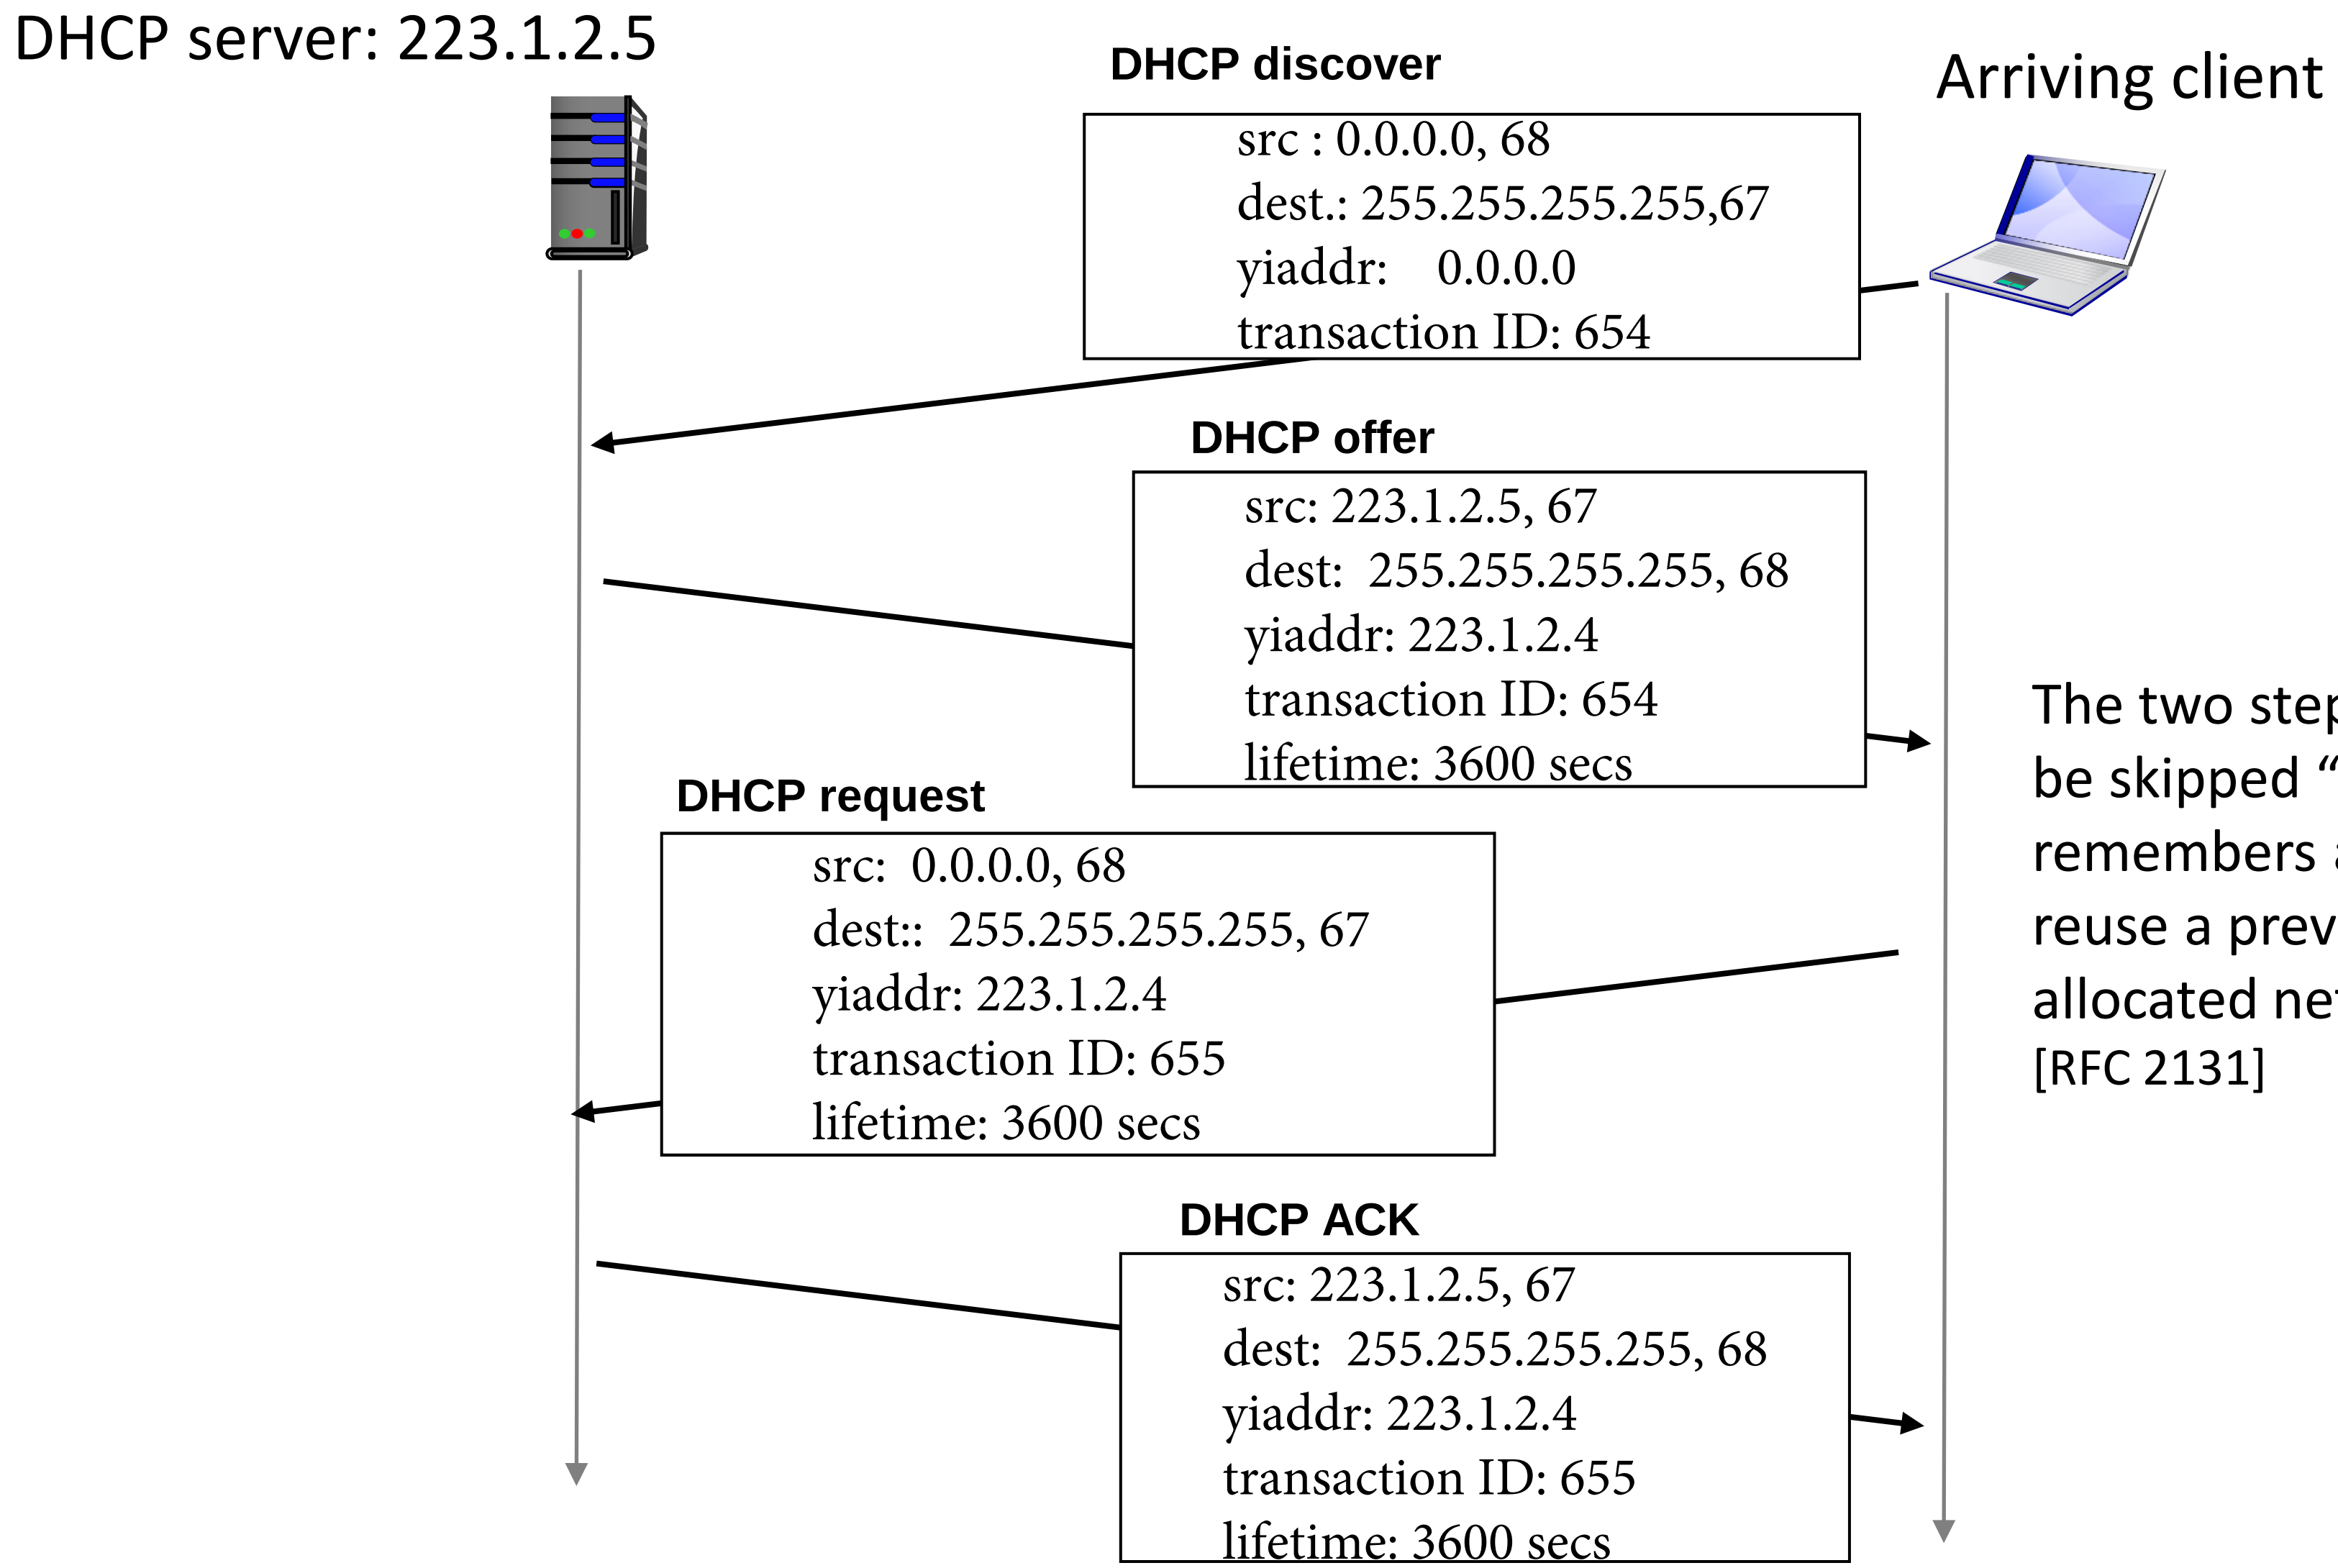

The two steps above can be skipped "if a client remembers and wishes to reuse a previously allocated network address" [RFC 2131]

DHCP: more than IP addresses

DHCP can return more than just allocated IP address on subnet:

- address of first-hop router for client
- name and IP address of DNS sever
- network mask (indicating network versus host portion of address)

DHCP: example

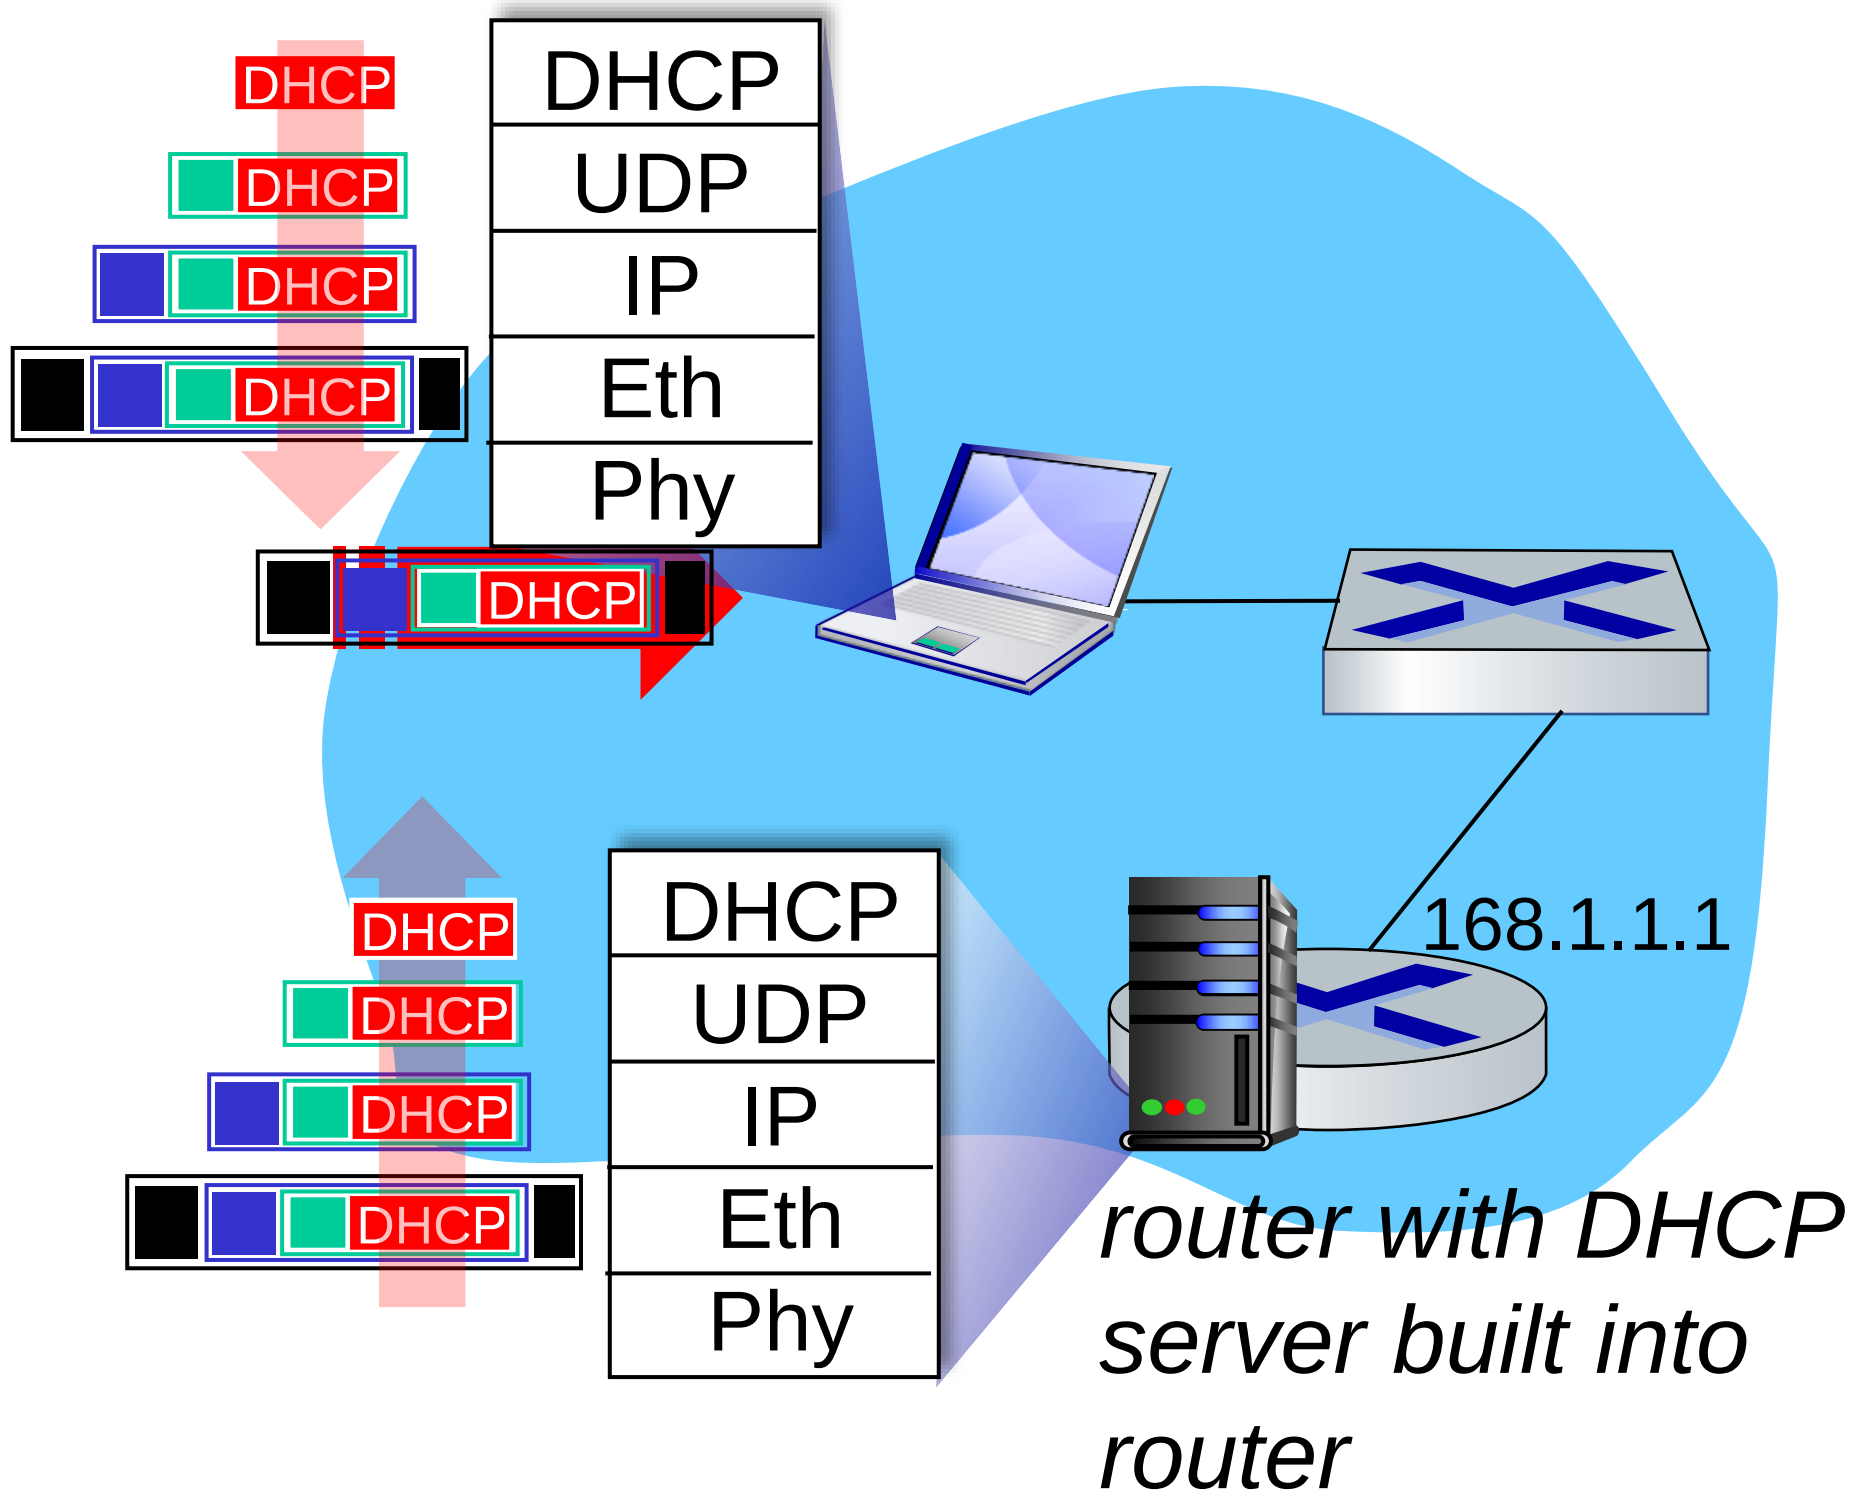

- Connecting laptop will use DHCP to get IP address, address of first-hop router, address of DNS server.
- DHCP REQUEST message encapsulated in UDP, encapsulated in IP, encapsulated in Ethernet
- Ethernet frame broadcast (dest: FFFFFFFFFFFF) on LAN, received at router running DHCP server
- Ethernet demux'ed to IP demux'ed, UDP demux'ed to DHCP

DHCP: example

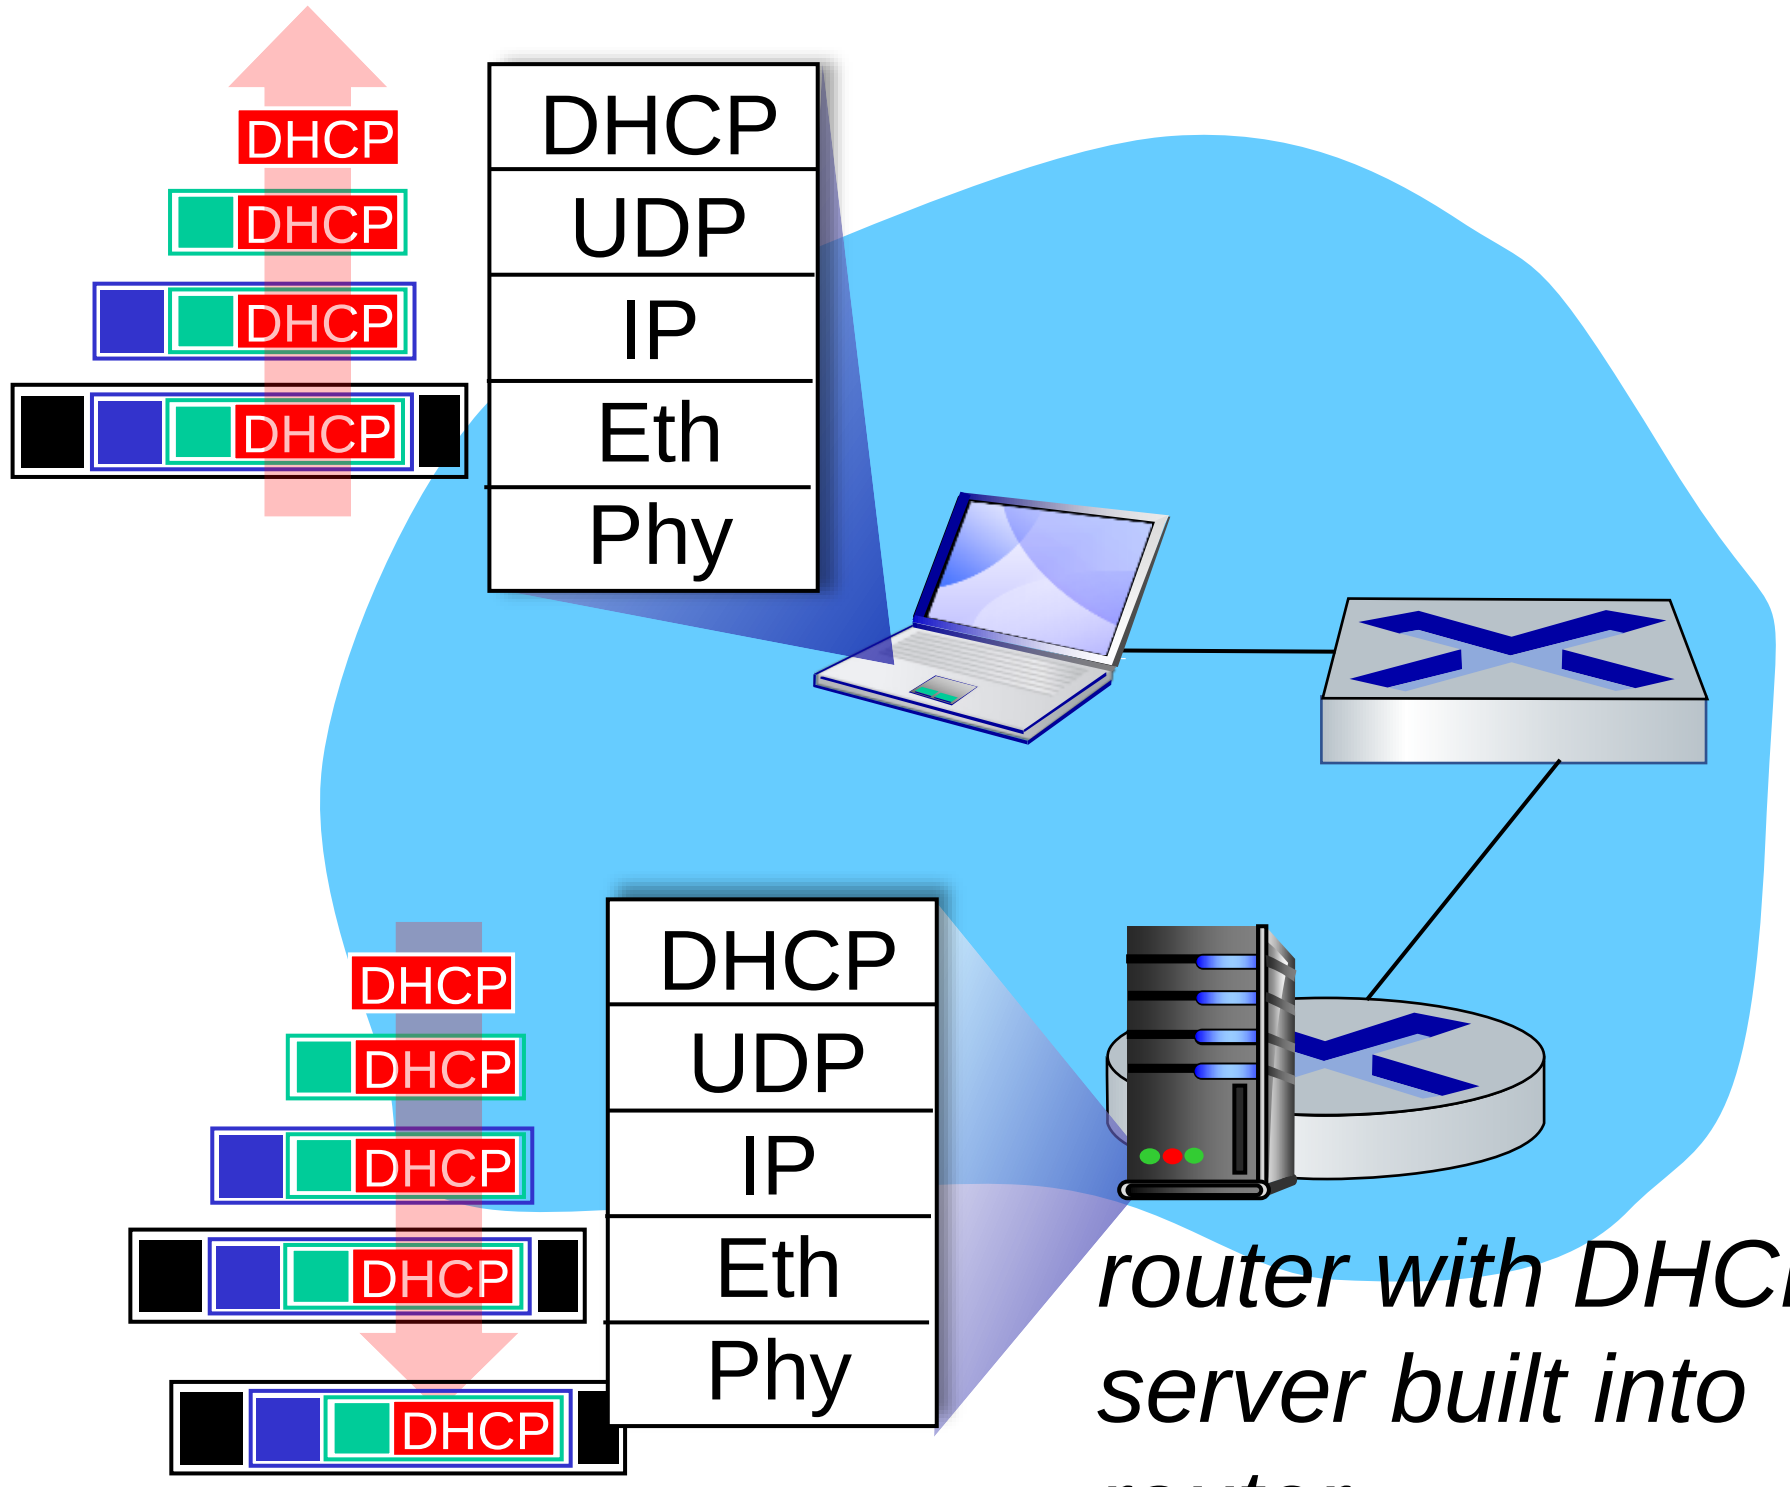

router with DHCP server built into router

- DCP server formulates DHCP ACK containing client's IP address, IP address of first-hop router for client, name & IP address of DNS server
- encapsulated DHCP server reply forwarded to client, demuxing up to DHCP at client
- client now knows its IP address, name and IP address of DNS server, IP address of its first-hop router

IP addresses: how to get one?

Q: how does *network* get subnet part of IP address?

A: gets allocated portion of its provider ISP's address space

ISP's block	<u>11001000 00010111 0001</u>0000 00000000	200.23.16.0/20

ISP can then allocate out its address space in 8 blocks:

Organization 0	<u>11001000 00010111 0001000</u>0 00000000	200.23.16.0/23
Organization 1	<u>11001000 00010111 0001001</u>0 00000000	200.23.18.0/23
Organization 2	<u>11001000 00010111 0001010</u>0 00000000	200.23.20.0/23
...	.....	....
Organization 7	<u>11001000 00010111 0001111</u>0 00000000	200.23.30.0/23

Hierarchical addressing: route aggregation

hierarchical addressing allows efficient advertisement of routing information:

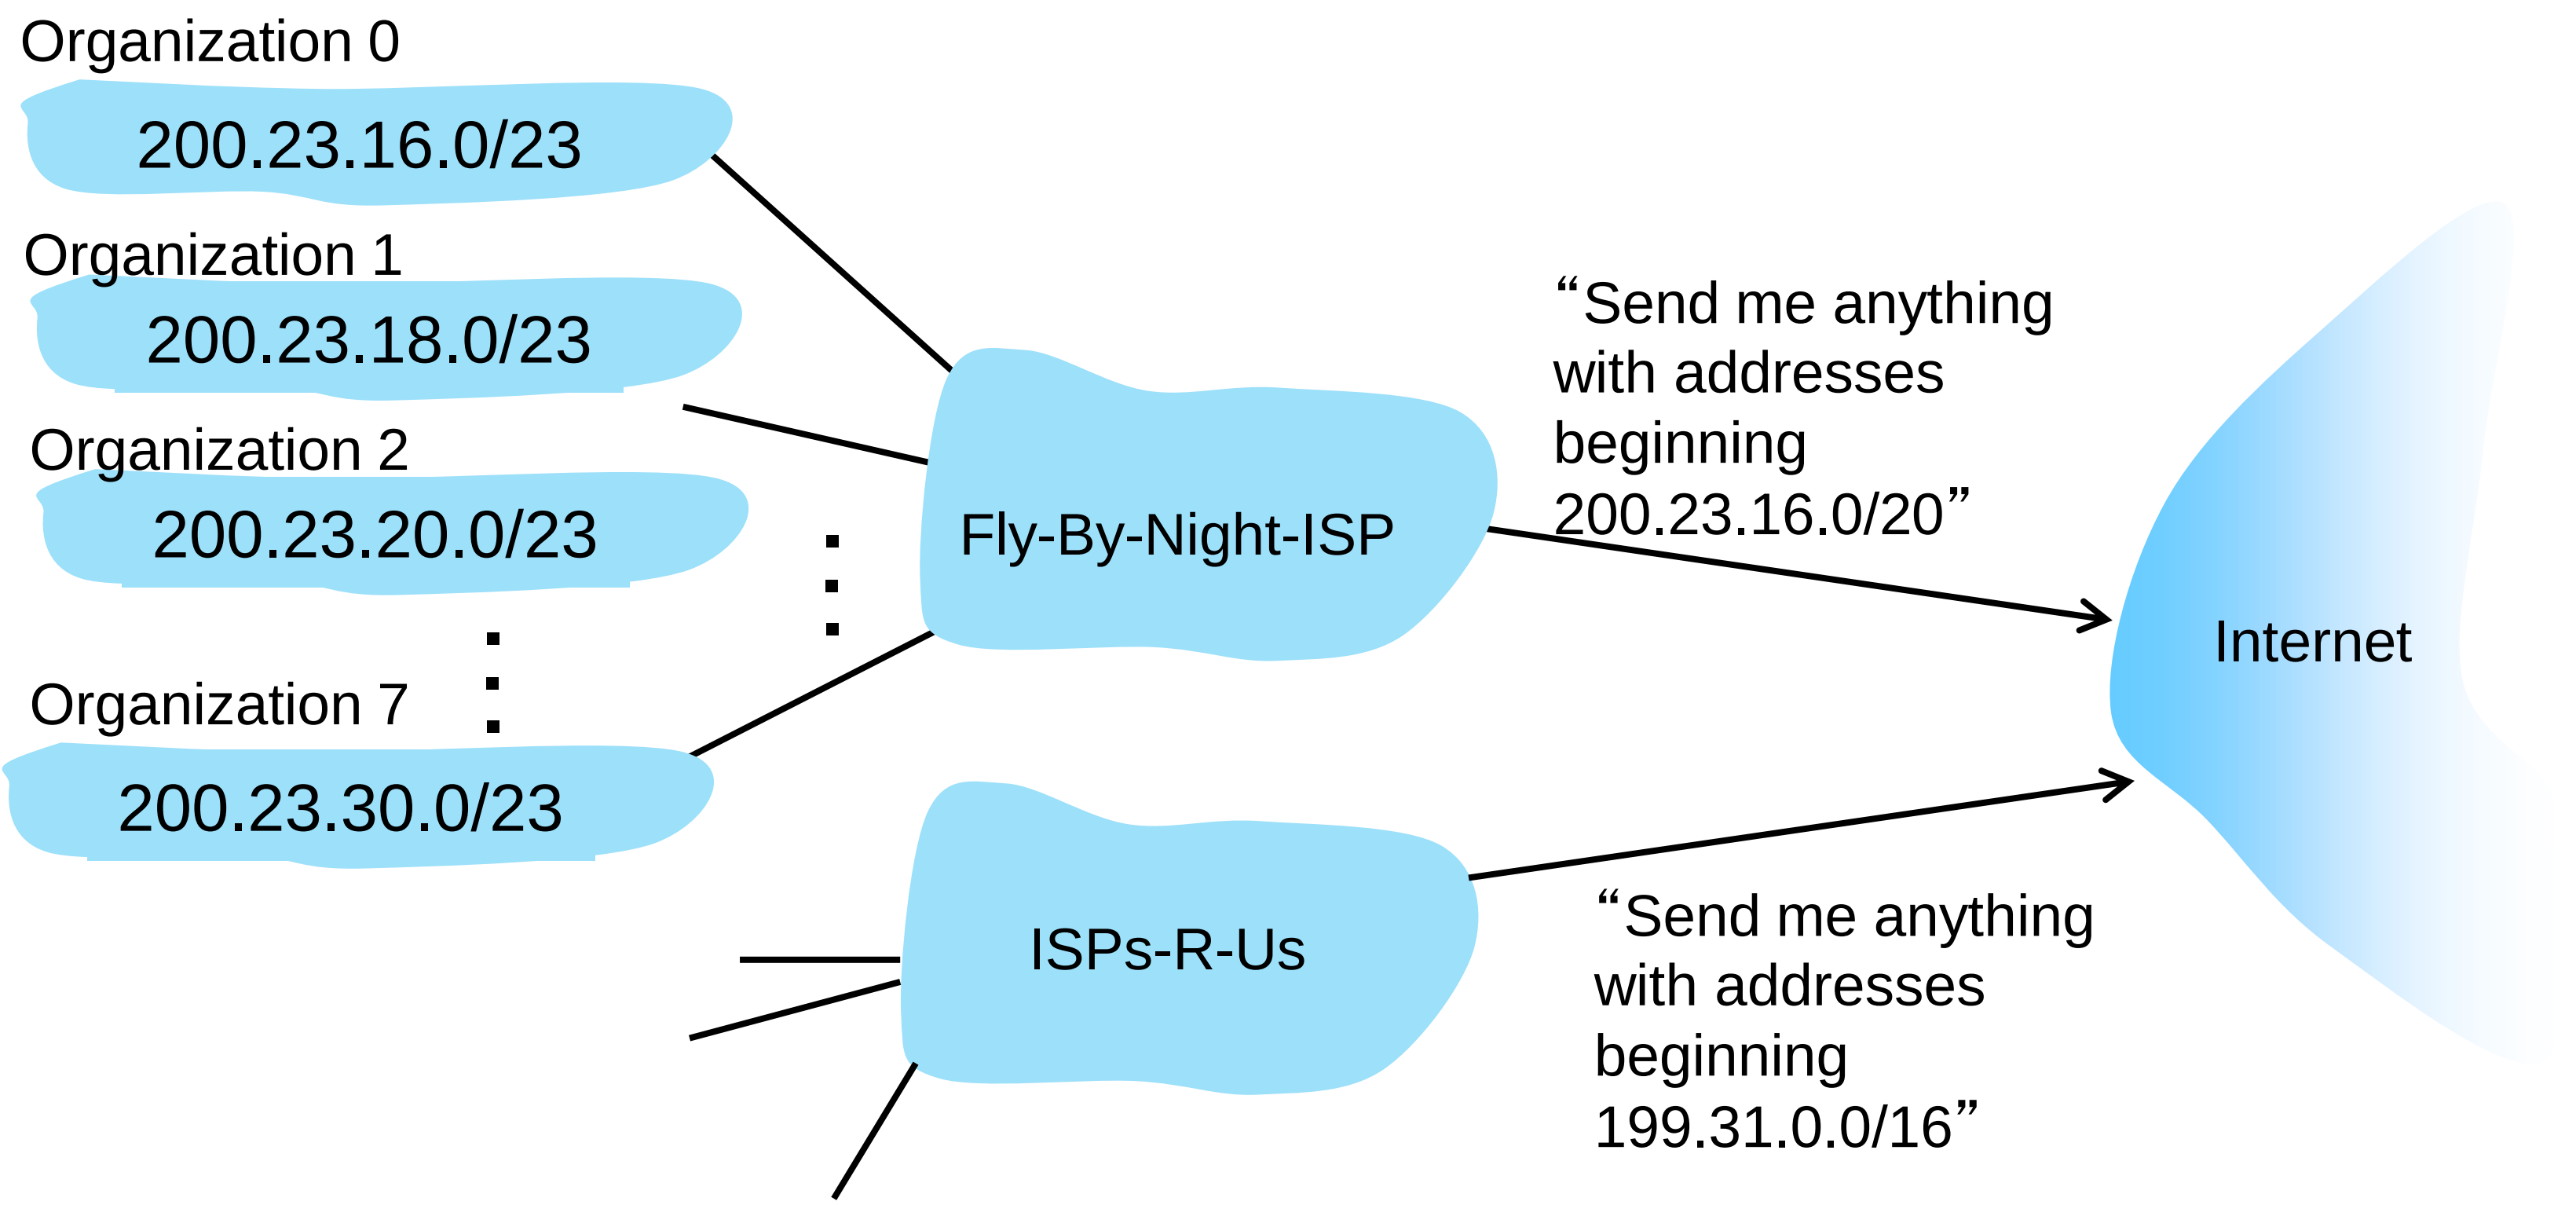

Hierarchical addressing: more specific routes

- Organization 1 moves from Fly-By-Night-ISP to ISPs-R-Us
- ISPs-R-Us now advertises a more specific route to Organization 1

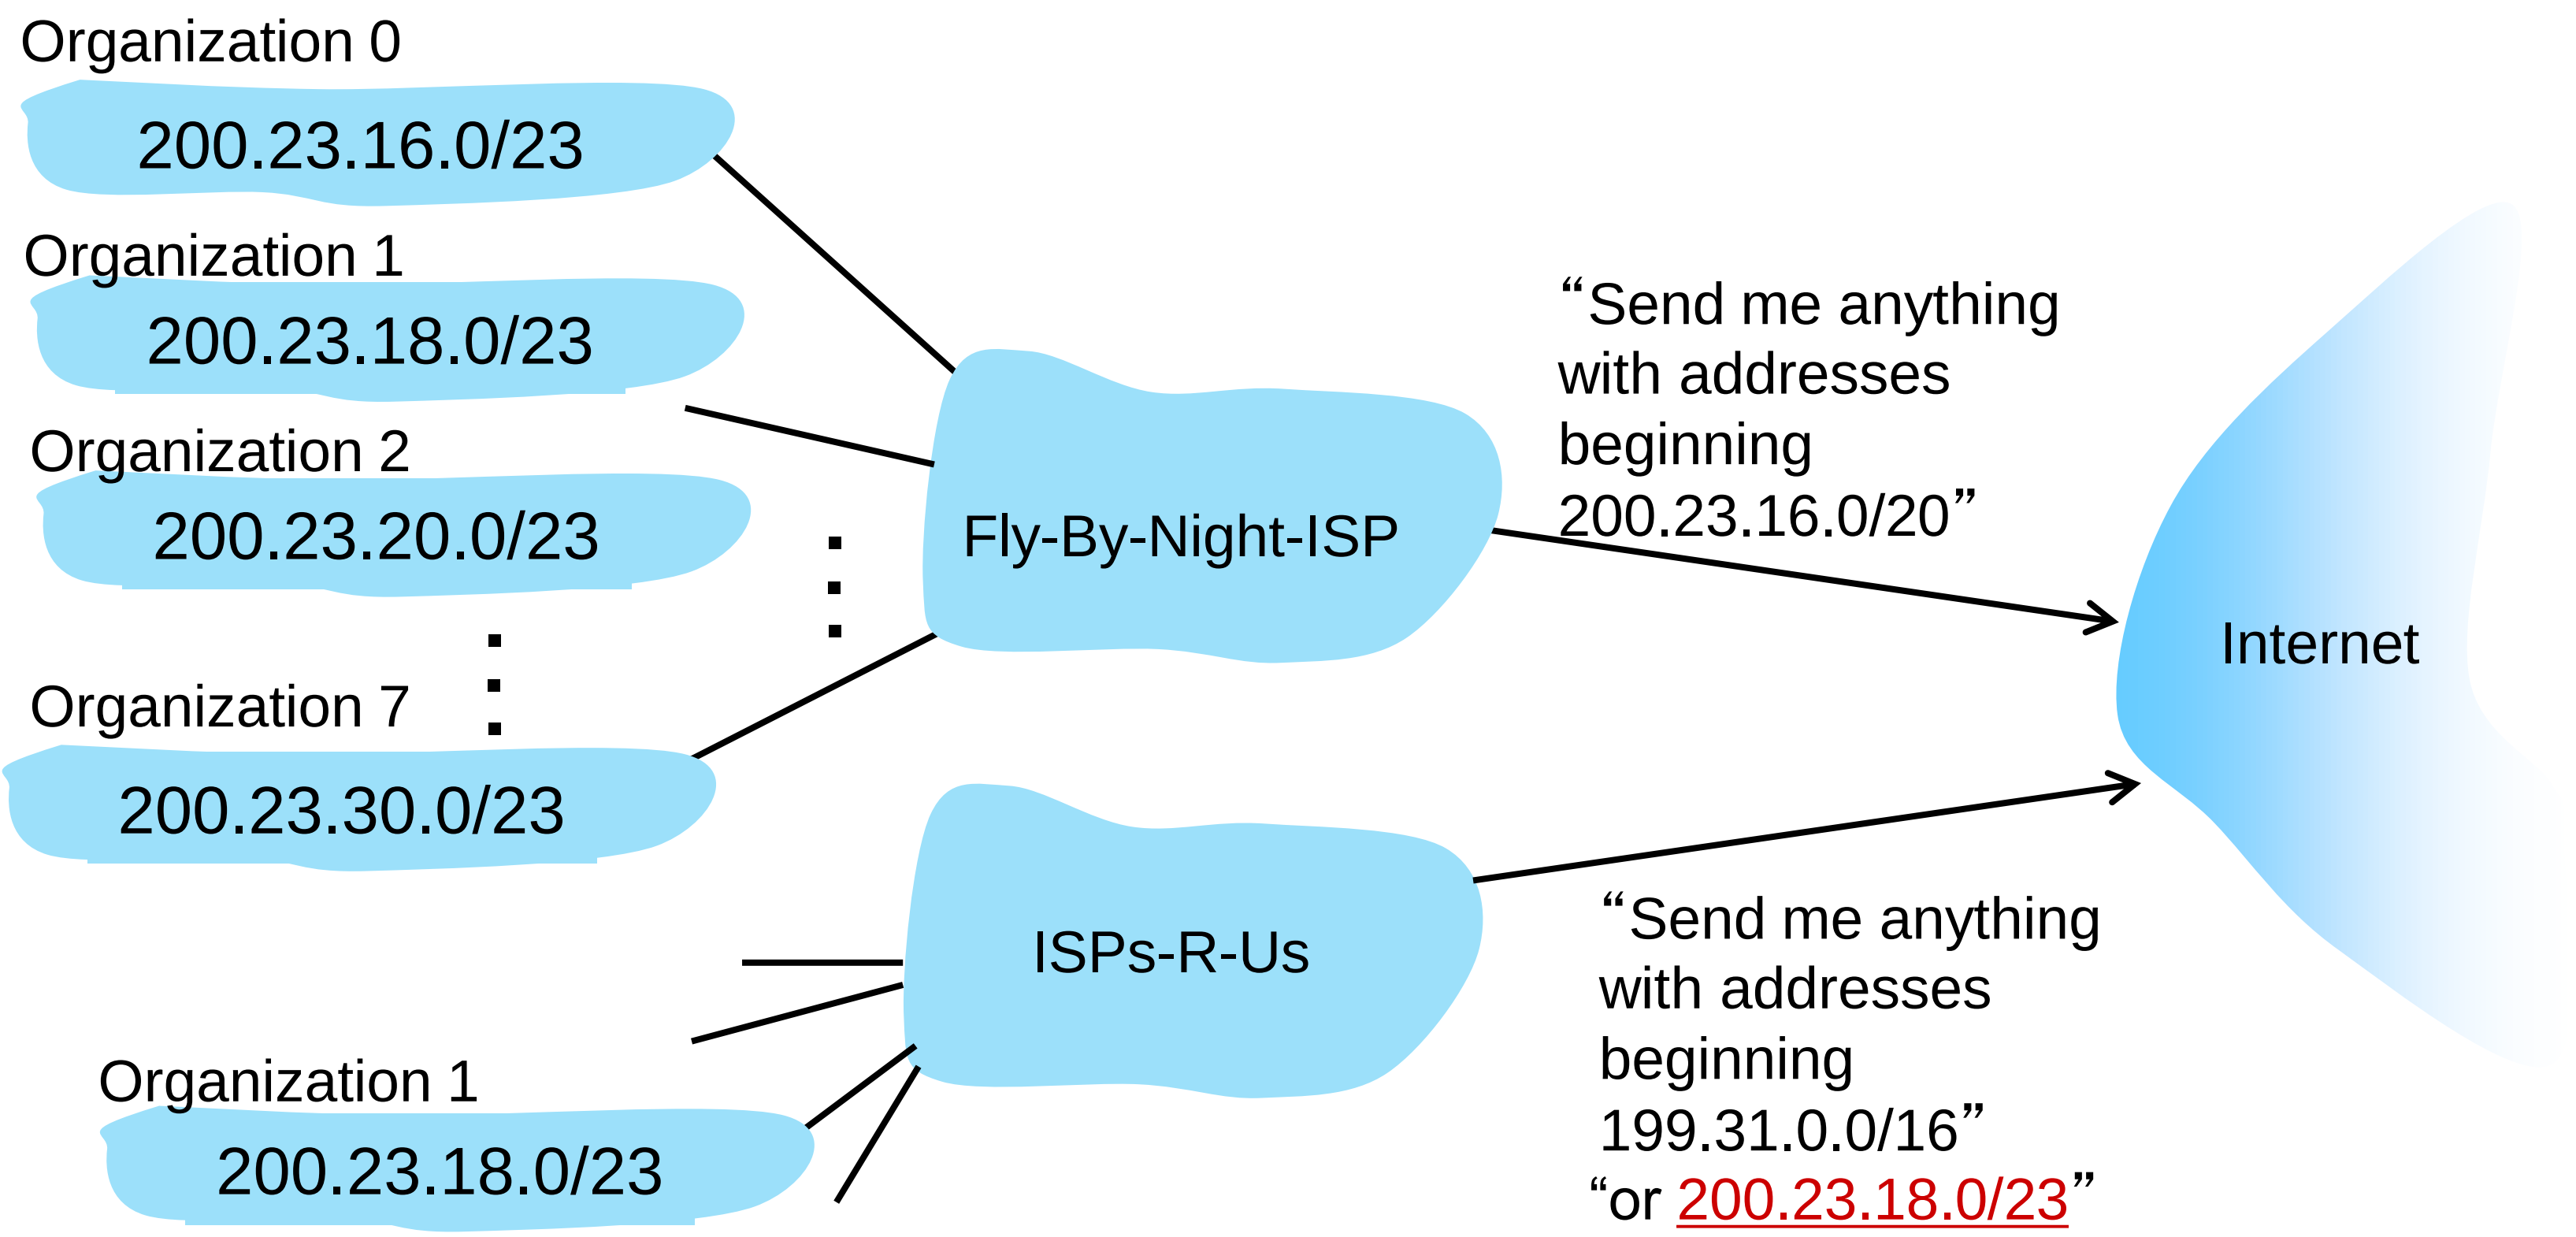

Hierarchical addressing: more specific routes

- Organization 1 moves from Fly-By-Night-ISP to ISPs-R-Us
- ISPs-R-Us now advertises a more specific route to Organization 1

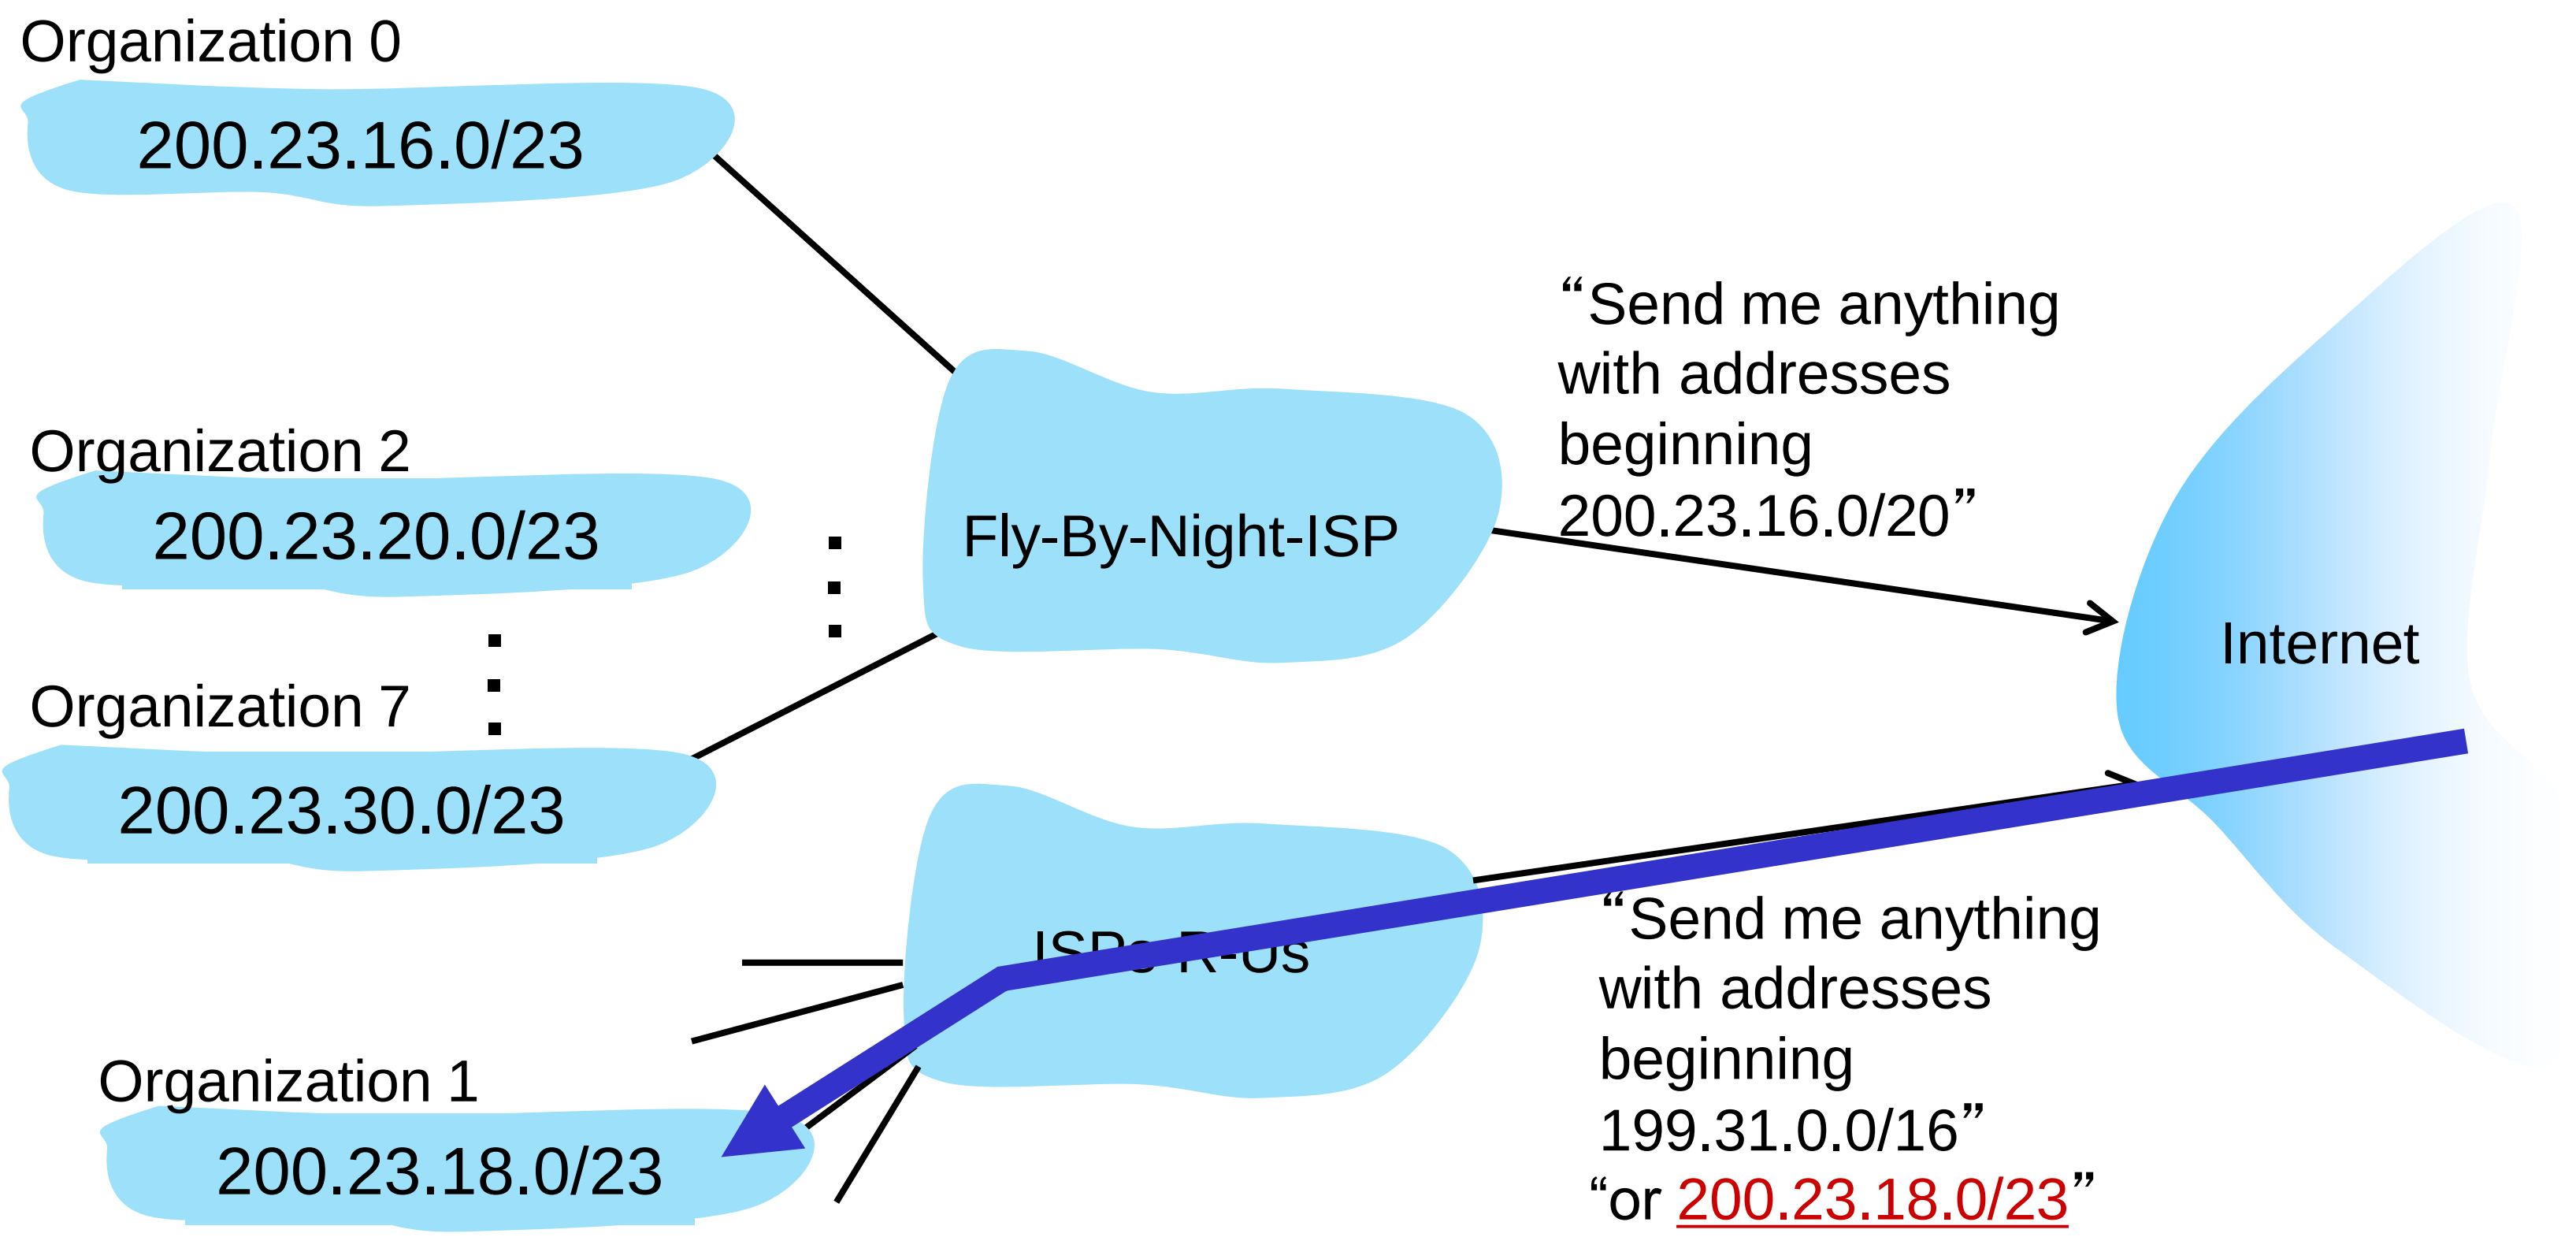

IP addressing: last words ...

Q: how does an ISP get block of addresses?

A: ICANN: Internet Corporation for Assigned Names and Numbers http://www.icann.org/

- allocates IP addresses, through 5 regional registries (RRs) (who may then allocate to local registries)
- manages DNS root zone, including delegation of individual TLD (.com, .edu , …) management

Q: are there enough 32-bit IP addresses?

- ICANN allocated last chunk of IPv4 addresses to RRs in 2011
- NAT (next) helps IPv4 address space exhaustion
- IPv6 has 128-bit address space

"Who the hell knew how much address space we needed?" Vint Cerf (reflecting on decision to make IPv4 address 32 bits long)

NAT: network address translation

NAT: all devices in local network share just one IPv4 address as far as outside world is concerned

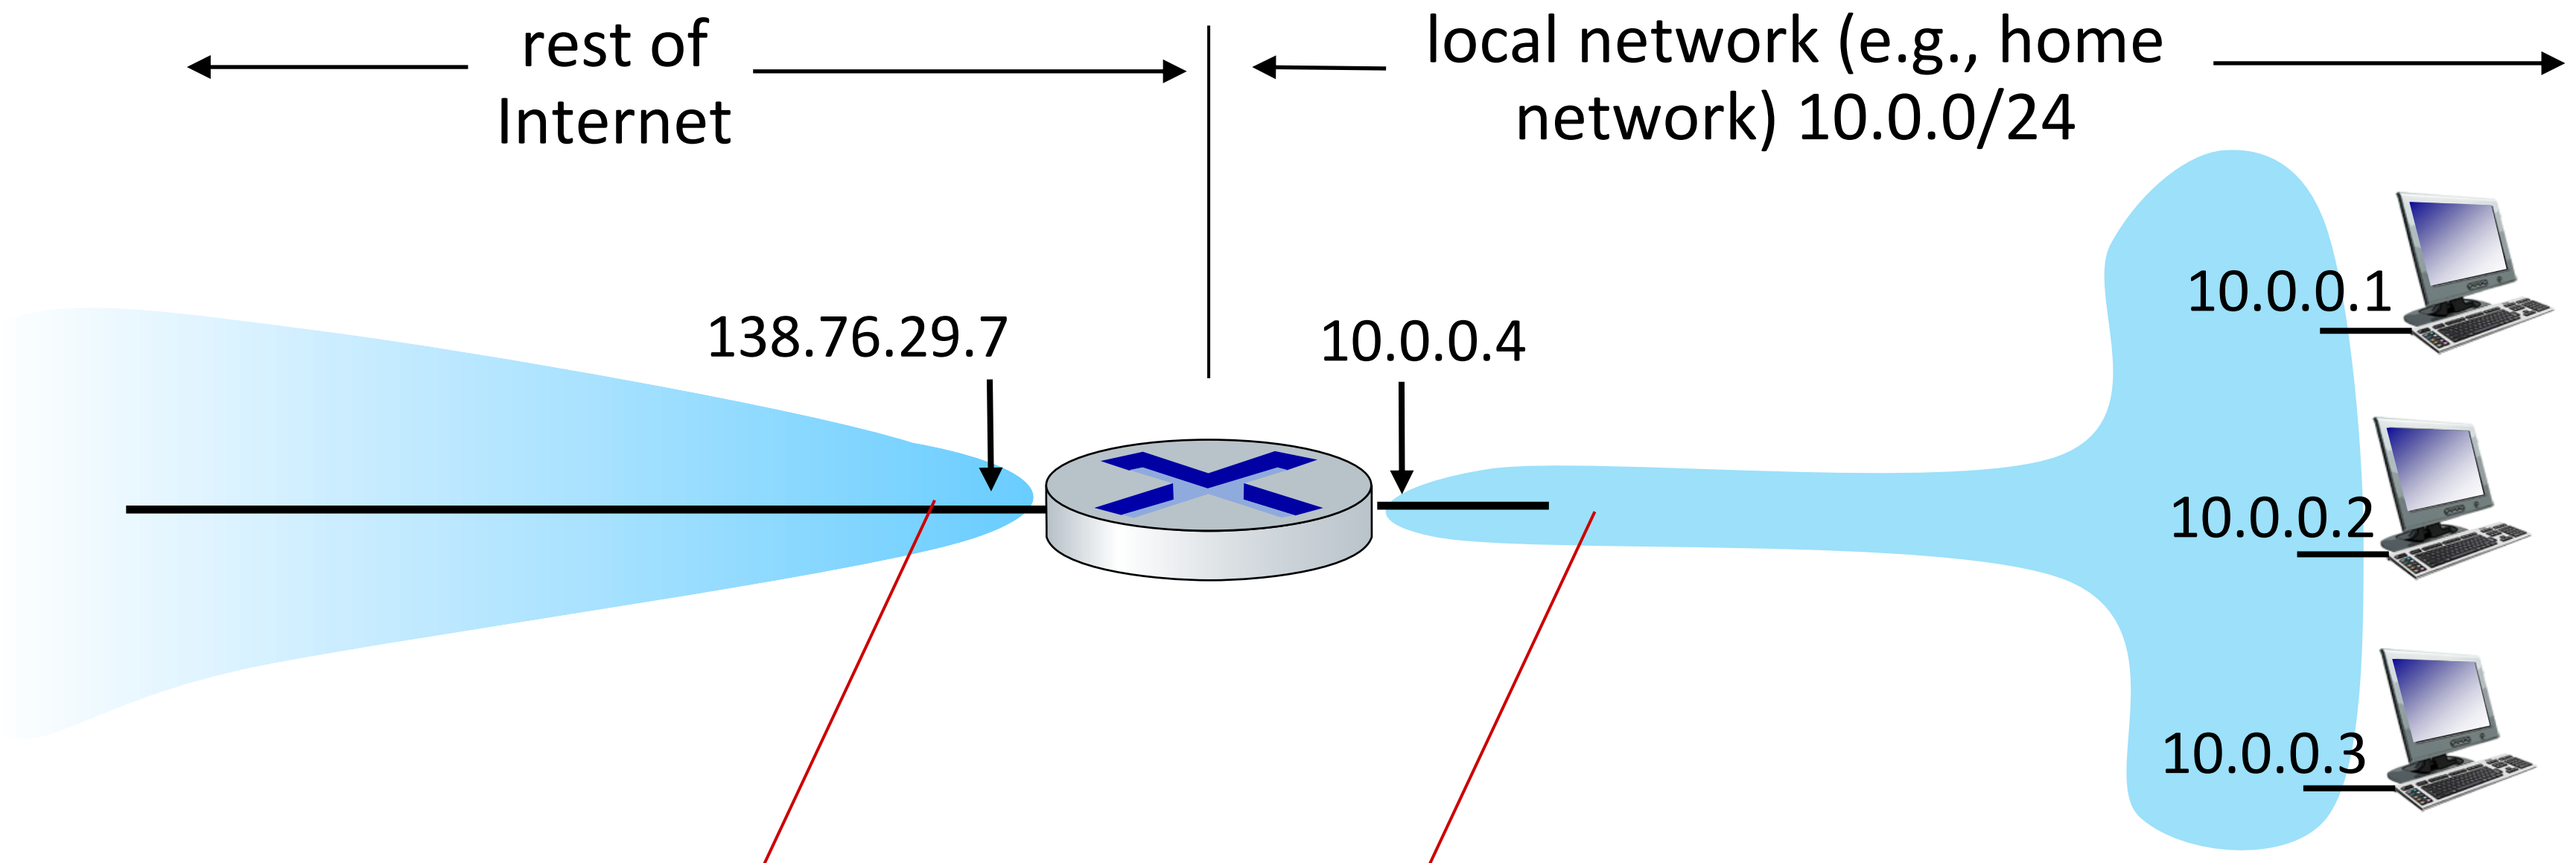

all datagrams *leaving* local network have *same* source NAT IP address: 138.76.29.7, but *different* source port numbers

datagrams with source or destination in this network have 10.0.0/24 address for source, destination (as usual)

NAT: network address translation

- all devices in local network have 32-bit addresses in a "private" IP address space (10/8, 172.16/12, 192.168/16 prefixes) that can only be used in local network
- advantages:
  - just one IP address needed from provider ISP for *all* devices
  - can change addresses of host in local network without notifying outside world
  - can change ISP without changing addresses of devices in local network
  - security: devices inside local net not directly addressable, visible by outside world

NAT: network address translation

implementation: NAT router must (transparently):

- outgoing datagrams: replace (source IP address, port #) of every outgoing datagram to (NAT IP address, new port #)
  - remote clients/servers will respond using (NAT IP address, new port #) as destination address
- remember (in NAT translation table) every (source IP address, port #) to (NAT IP address, new port #) translation pair
- incoming datagrams: replace (NAT IP address, new port #) in destination fields of every incoming datagram with corresponding (source IP address, port #) stored in NAT table

NAT: network address translation

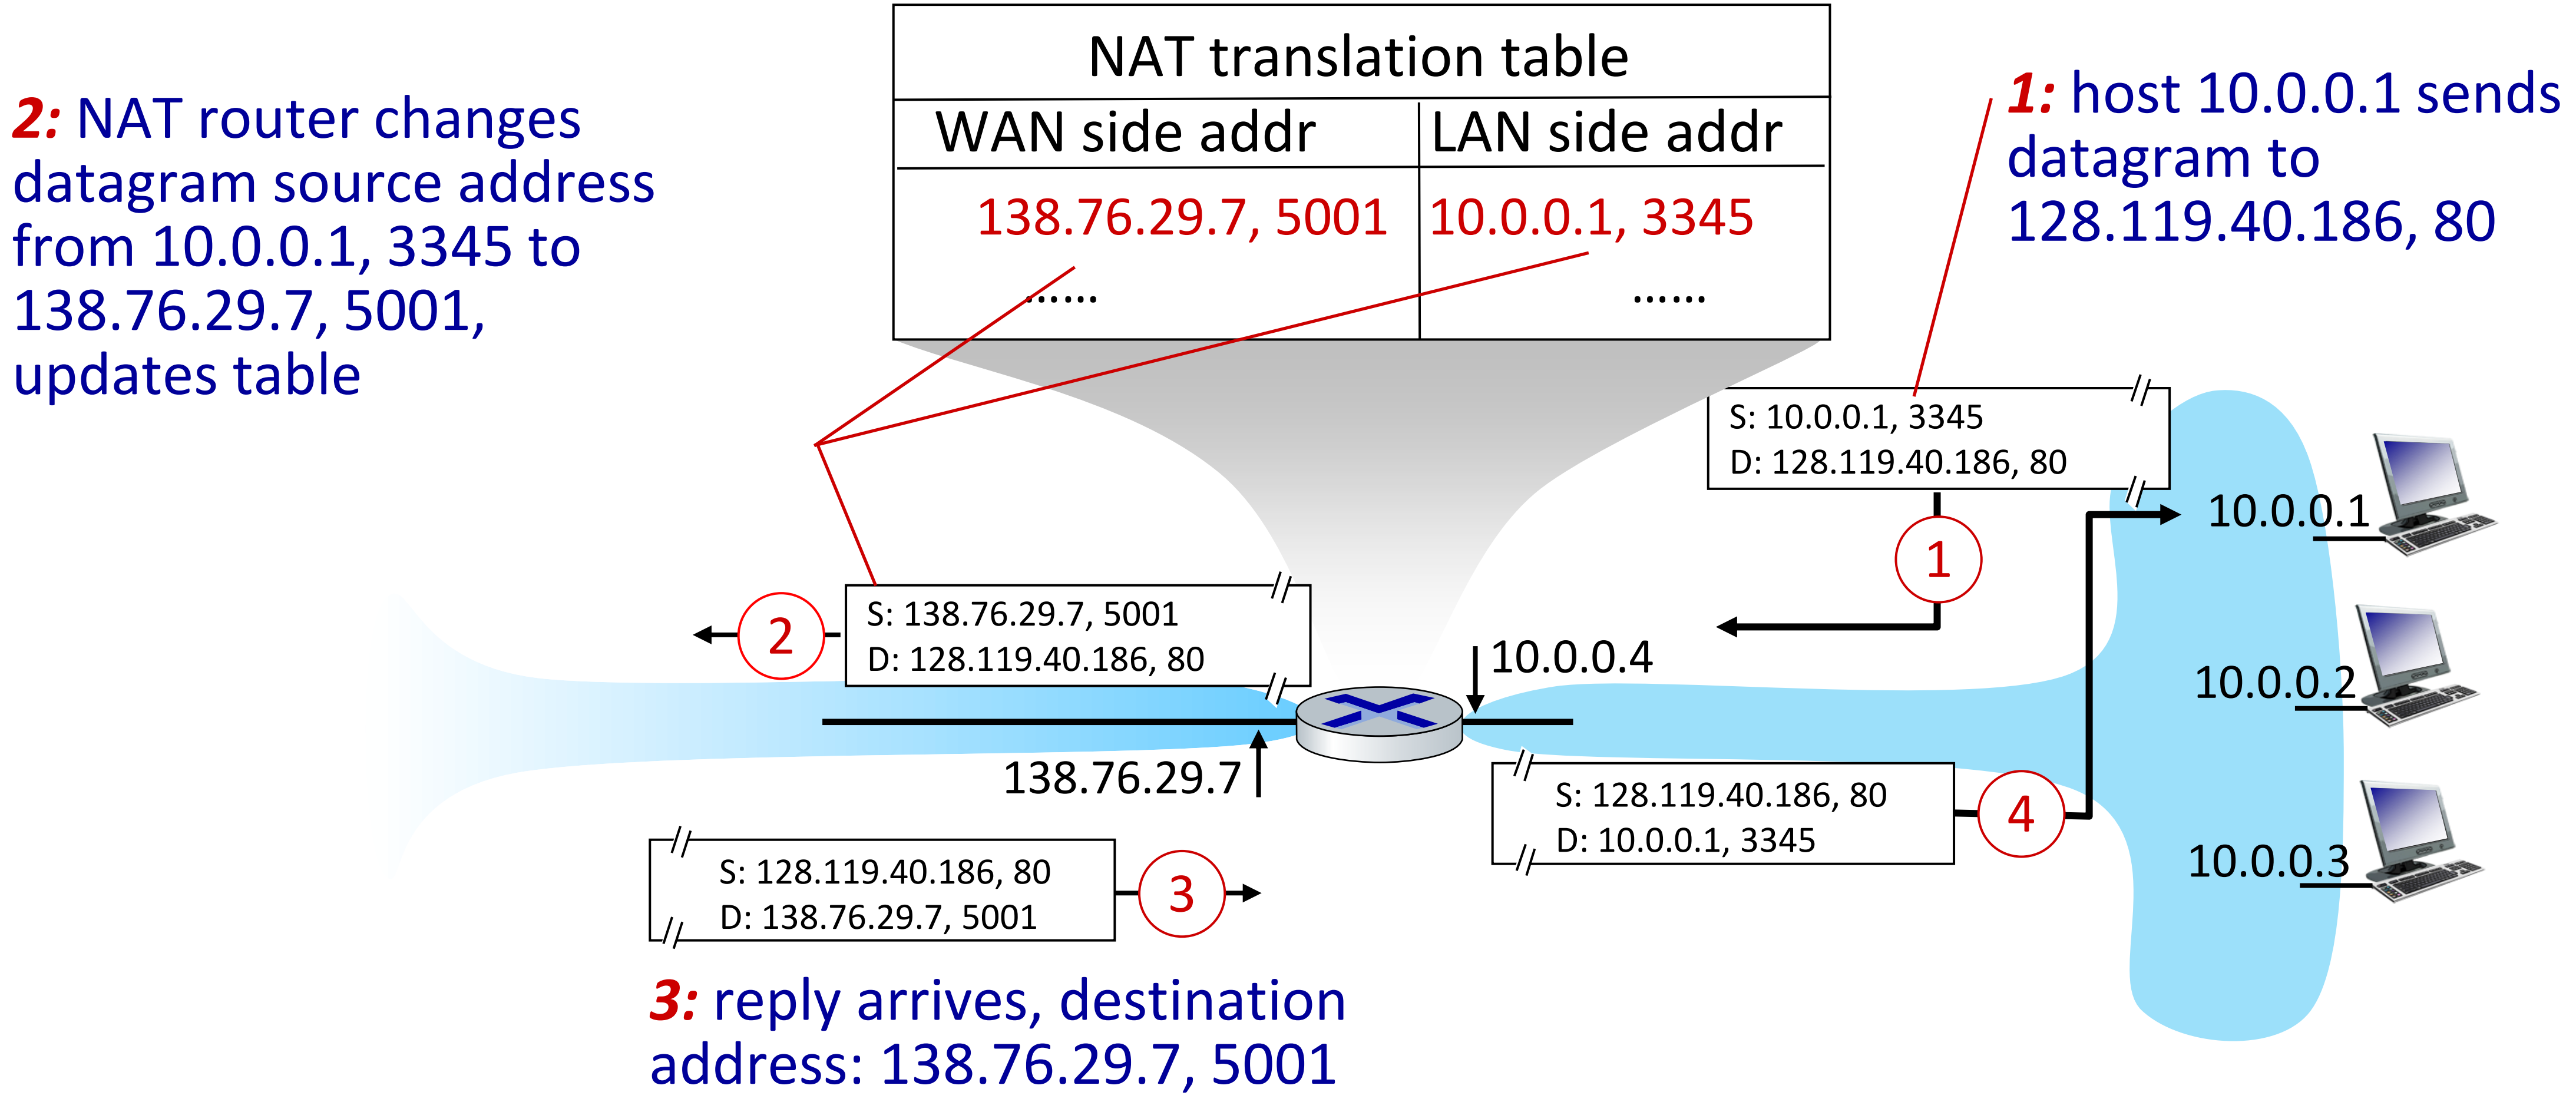

NAT: network address translation

- NAT has been controversial:
  - routers "should" only process up to layer 3
  - address "shortage" should be solved by IPv6
  - violates end-to-end argument (port # manipulation by network-layer device)
  - NAT traversal: what if client wants to connect to server behind NAT?
- but NAT is here to stay:
  - extensively used in home and institutional nets, 4G/5G cellular nets

IP fragmentation/reassembly

- network links have MTU (max. transfer size) - largest possible link-level frame
  - different link types, different MTUs
- large IP datagram divided ("fragmented") within net
  - one datagram becomes several datagrams
  - "reassembled" only at *destination*
  - IP header bits used to identify, order related fragments

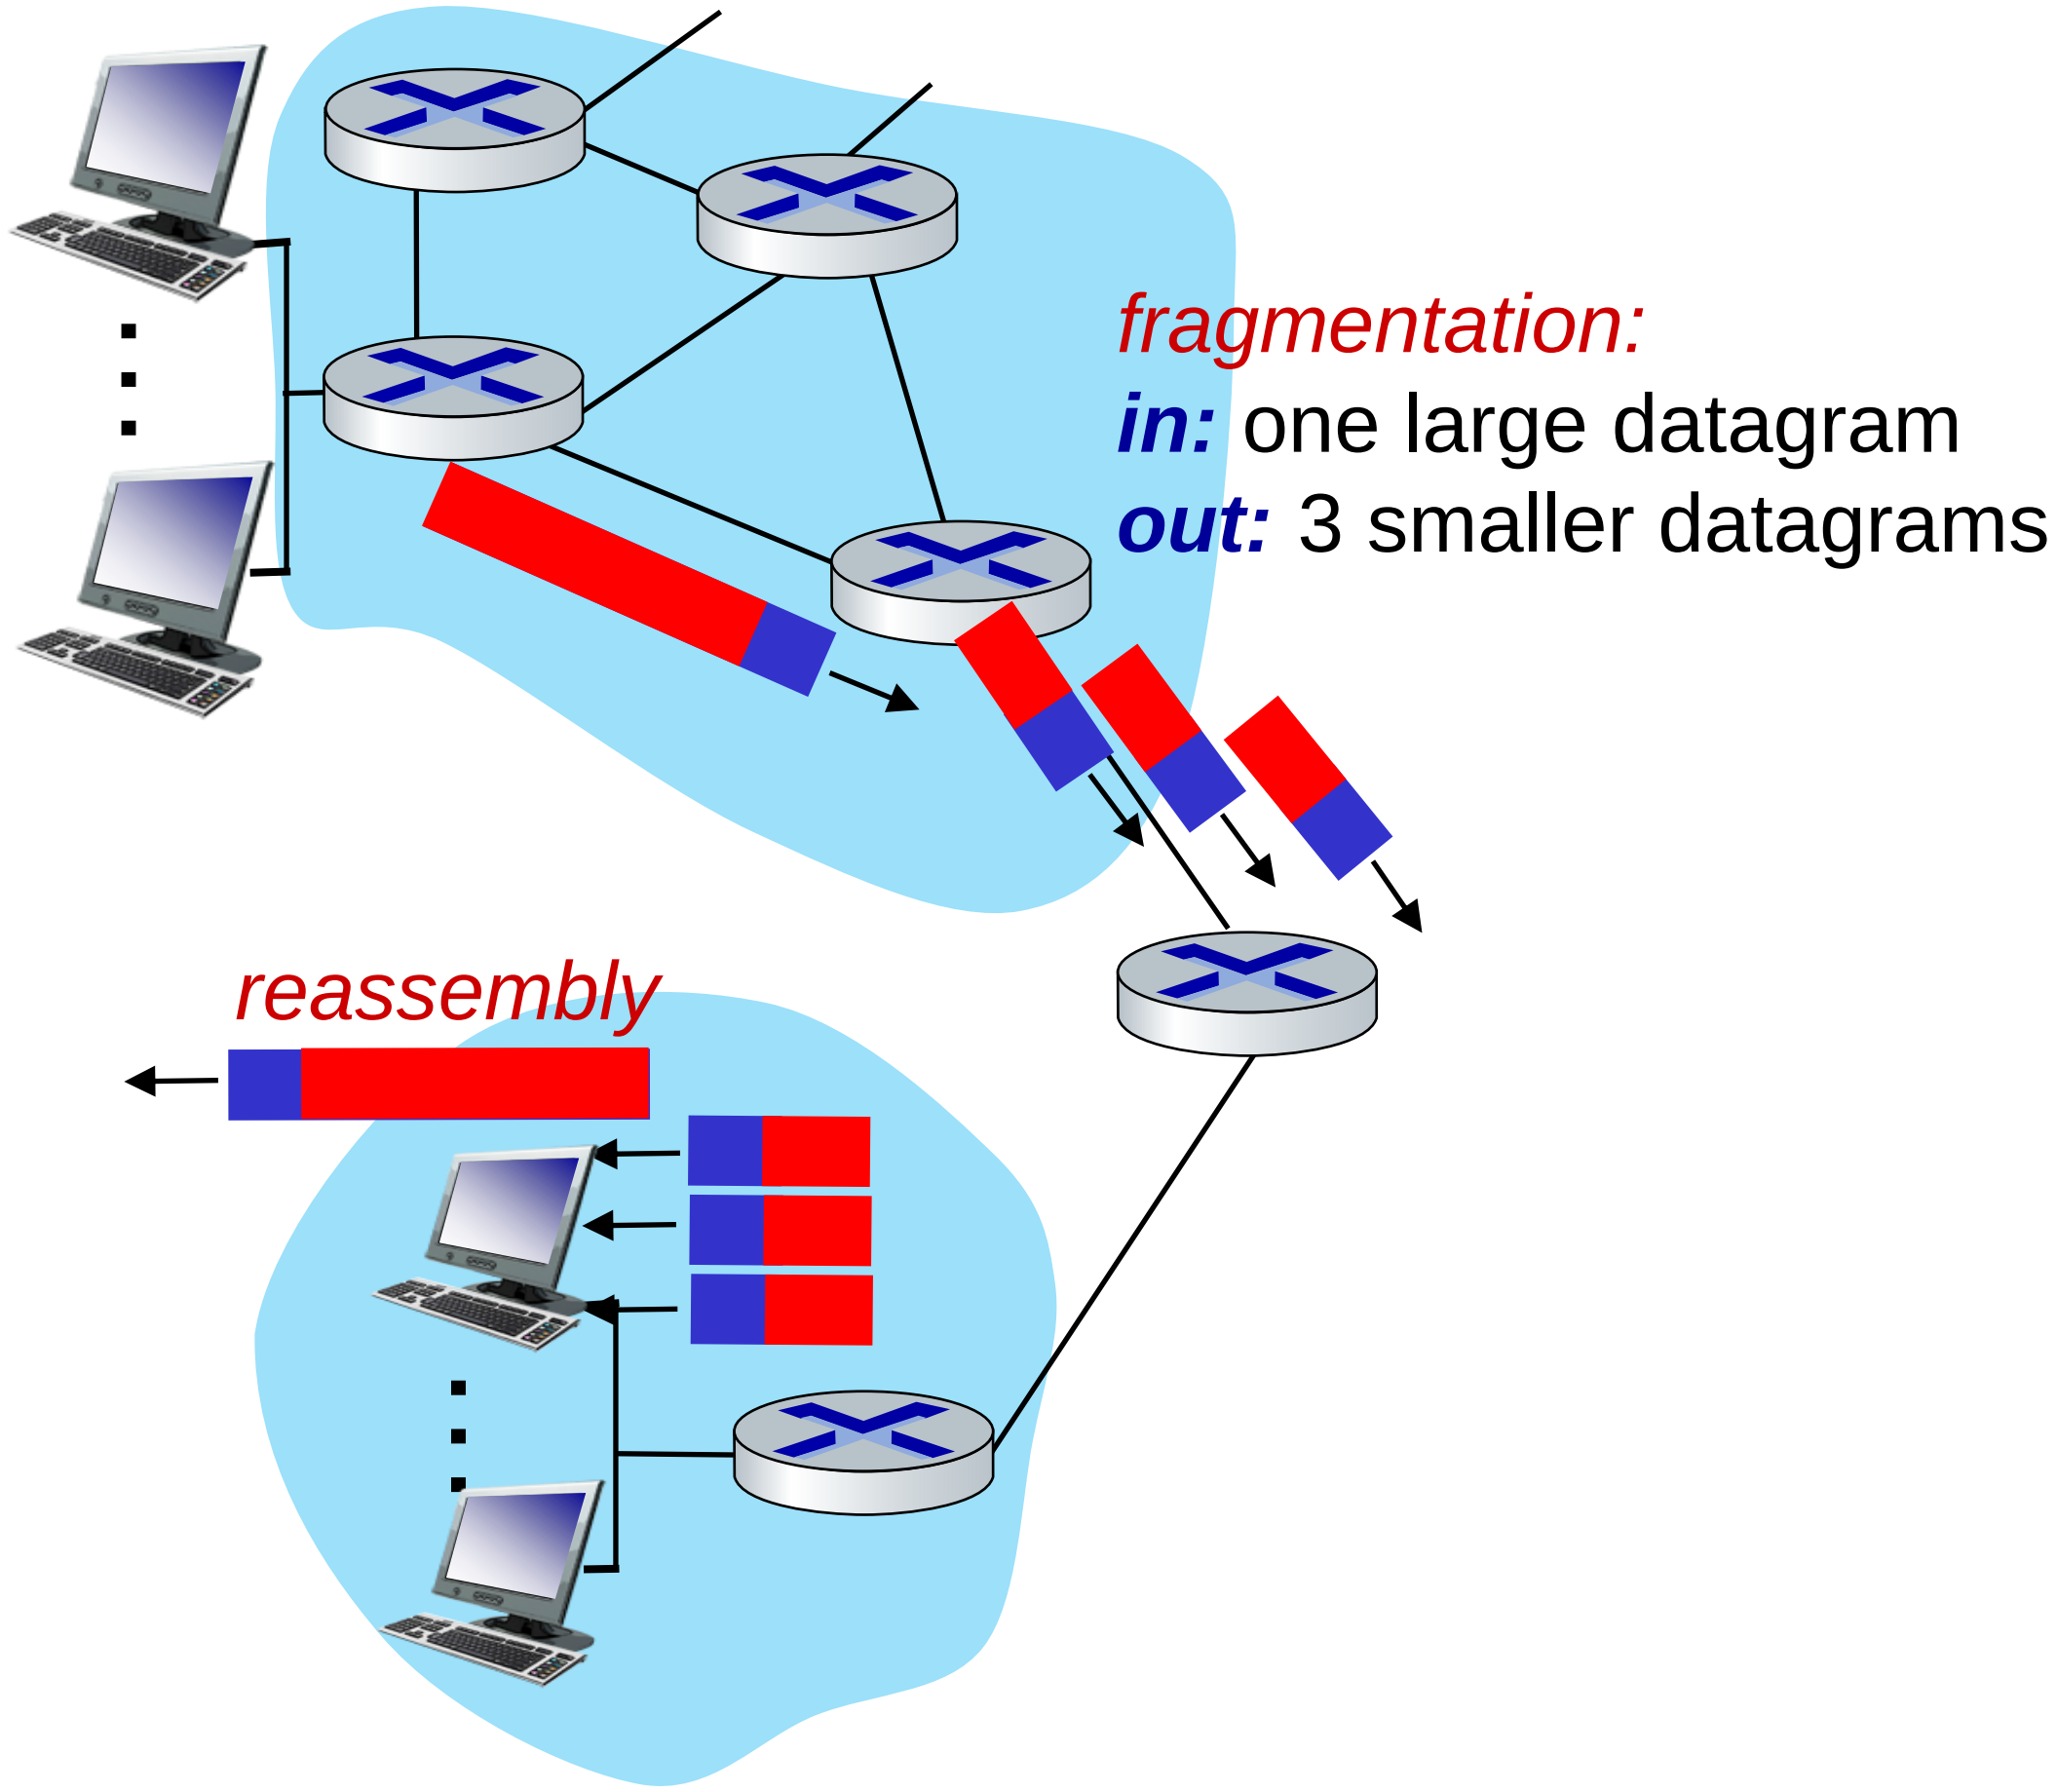

IP fragmentation/reassembly

example:

- 4000 byte datagram
- MTU = 1500 bytes

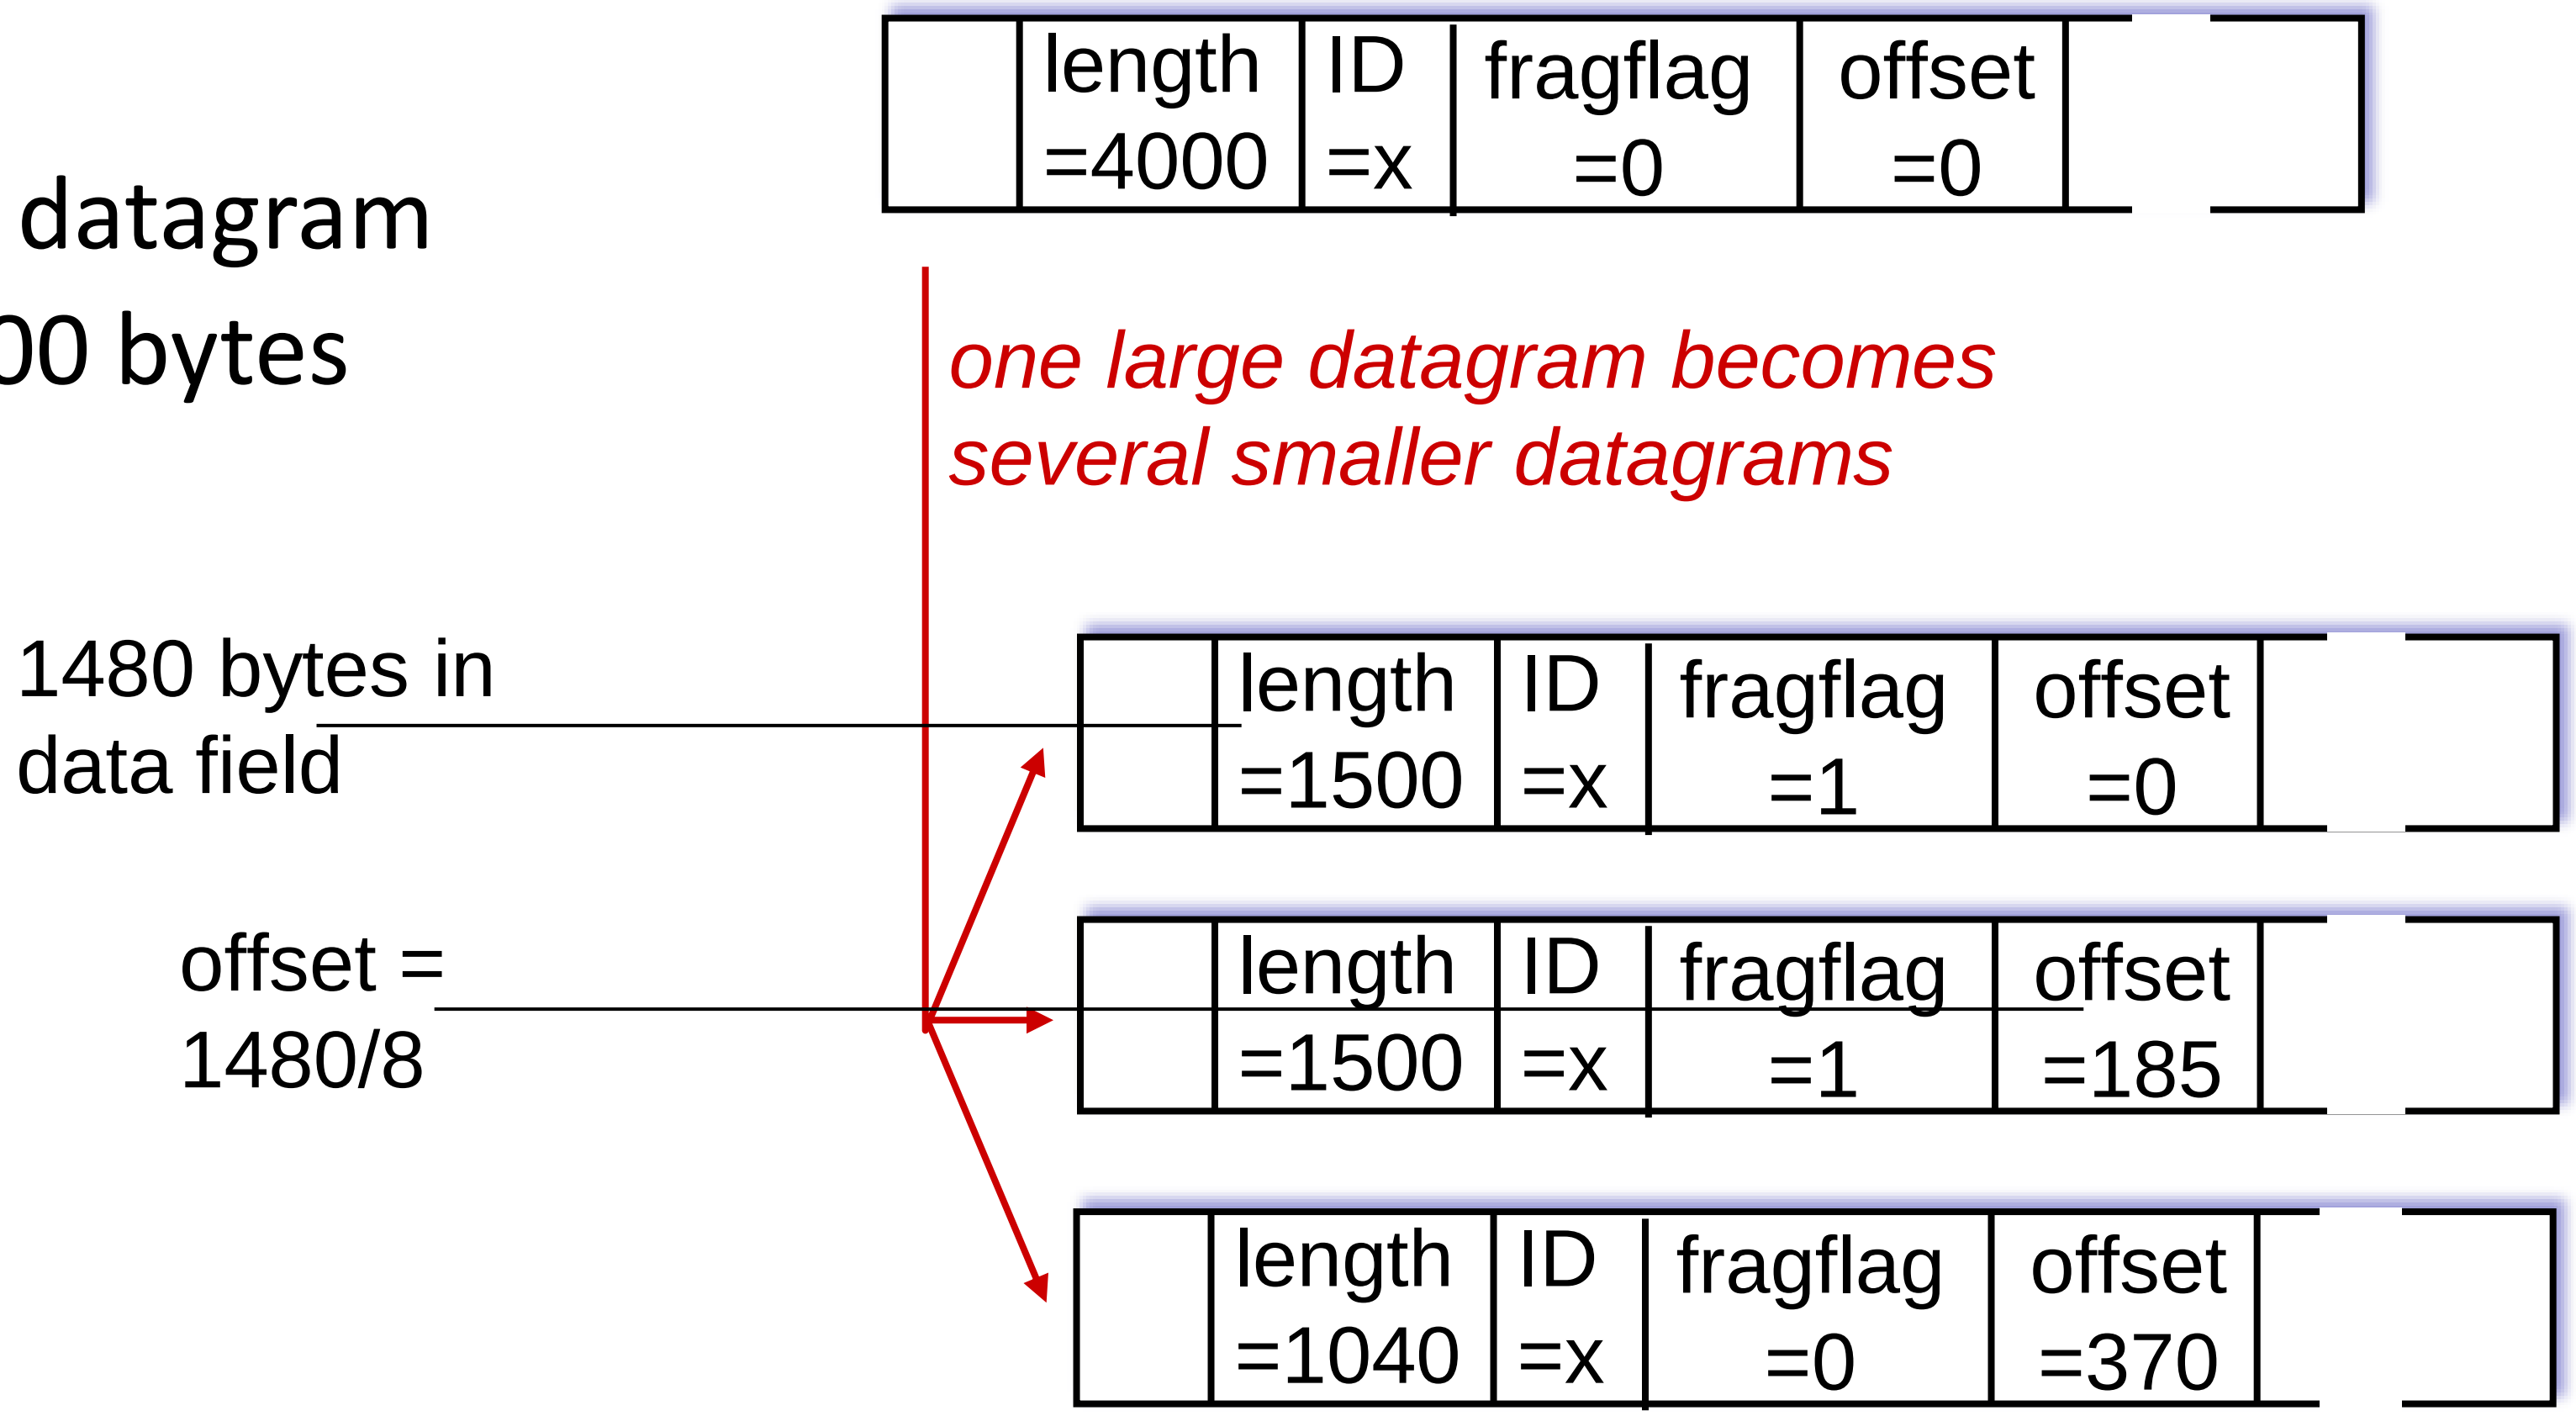

IPv6: motivation

- initial motivation: 32-bit IPv4 address space would be completely allocated
- additional motivation:
  - speed processing/forwarding: 40-byte fixed length header
  - enable different network-layer treatment of “flows”

IPv6 datagram format

priority: identify priority among datagrams in flow

128-bit IPv6 addresses

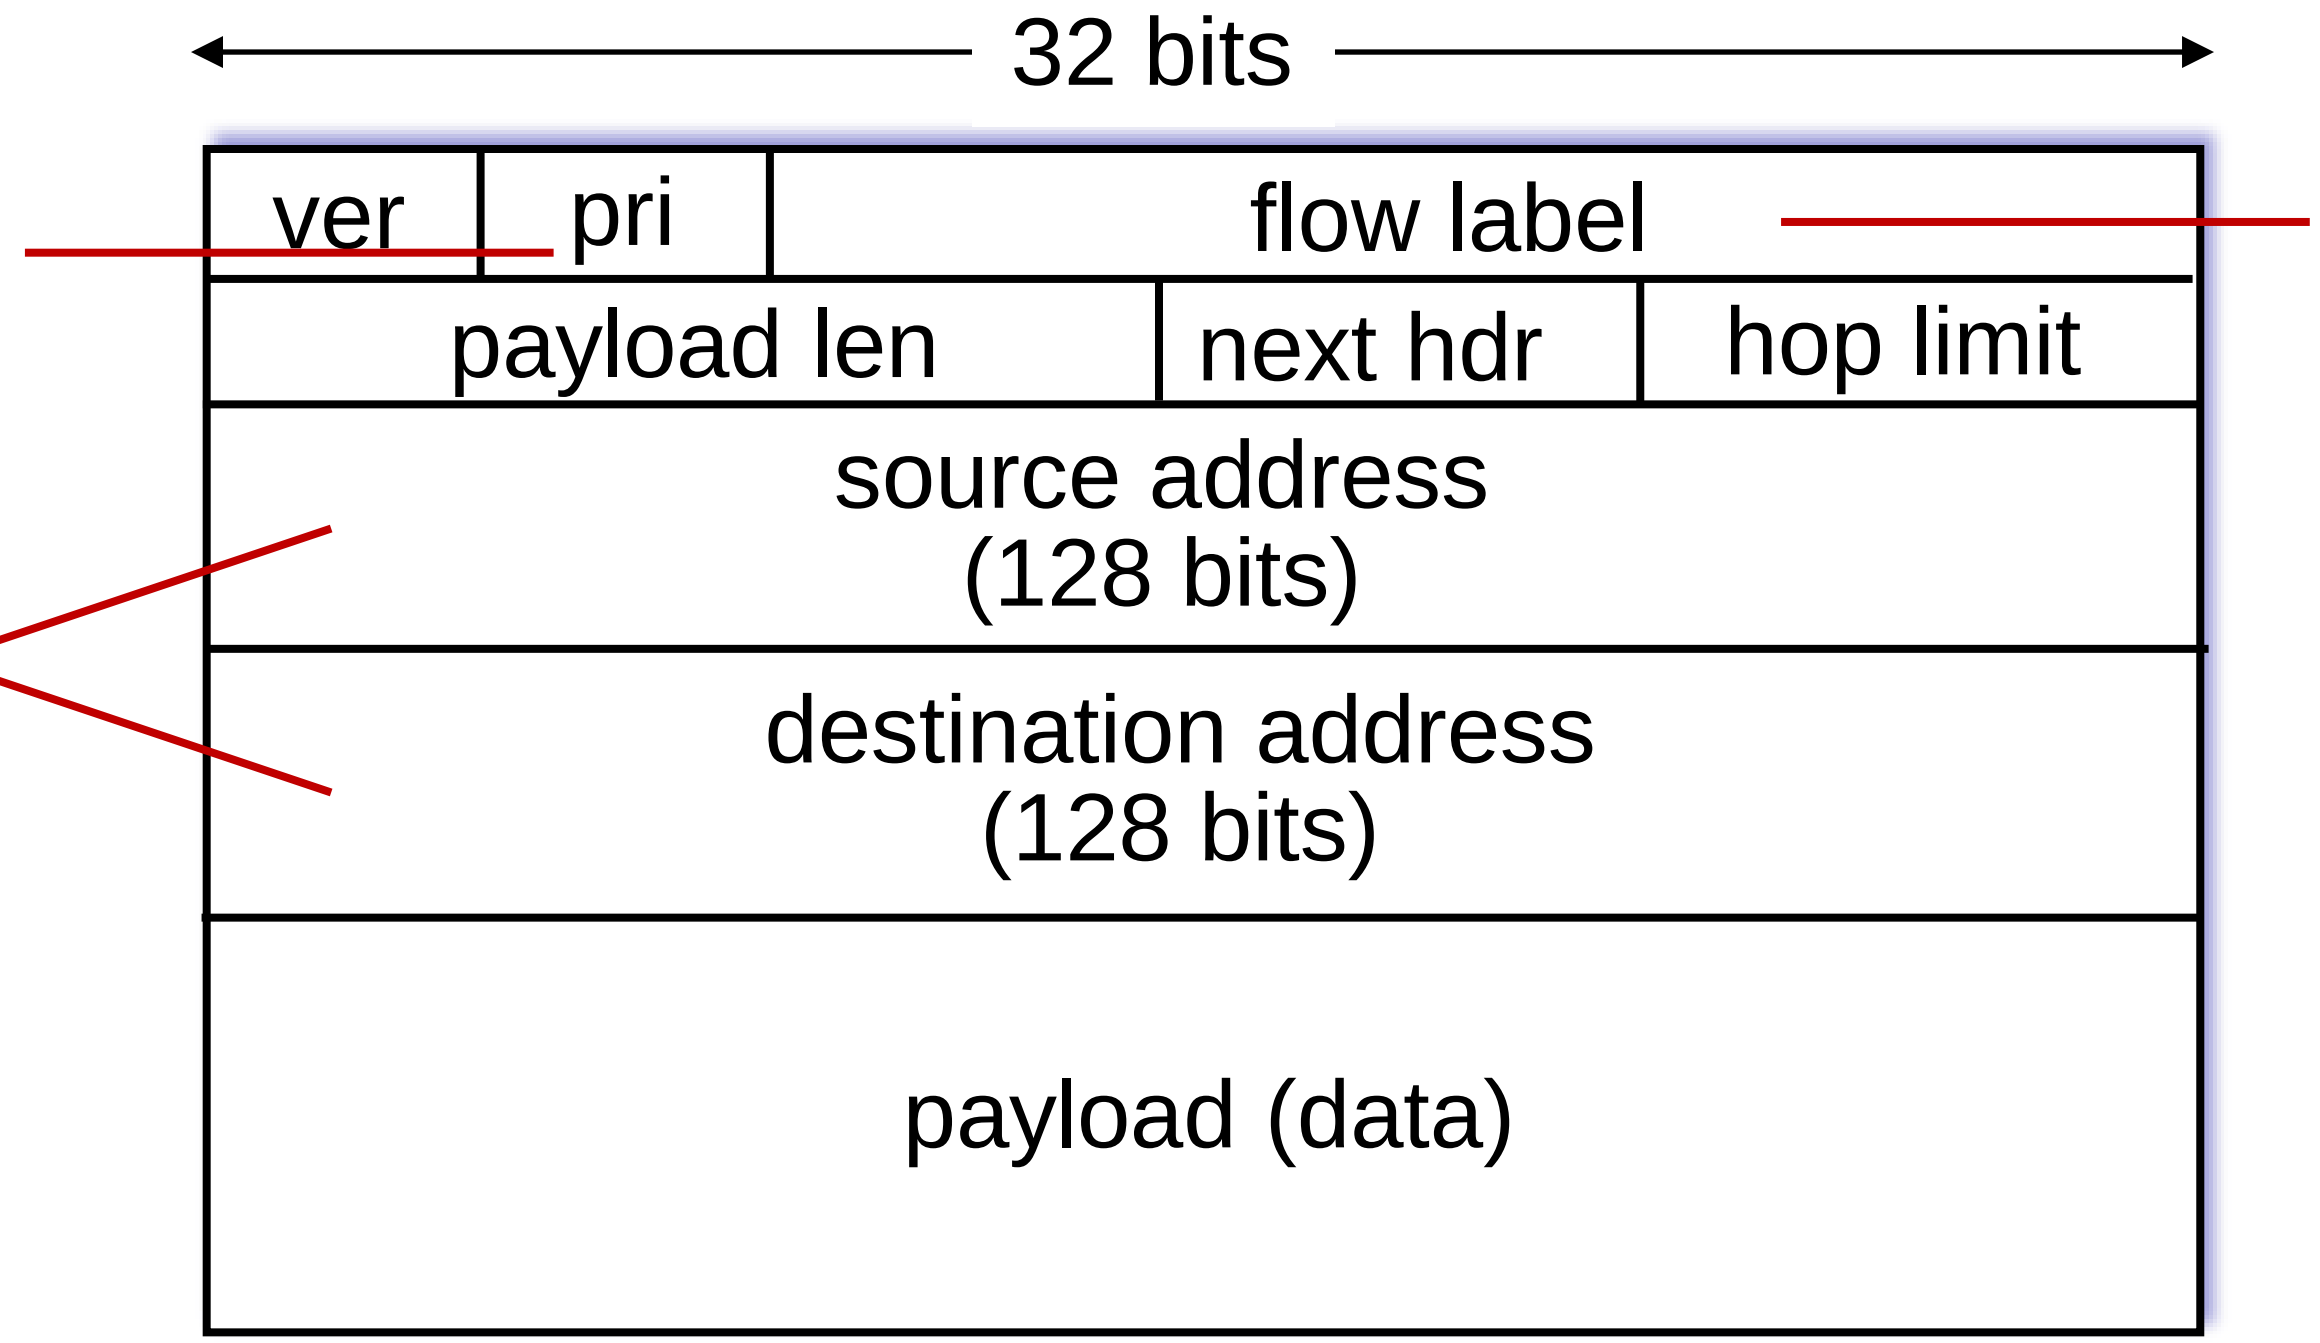

flow label: identify datagrams in same "flow." (concept of "flow" not well defined).

What's missing (compared with IPv4):

- no checksum (to speed processing at routers)
- no fragmentation/reassembly
- no options (available as upper-layer, next-header protocol at router)

Transition from IPv4 to IPv6

- not all routers can be upgraded simultaneously
  - no "flag days"
  - how will network operate with mixed IPv4 and IPv6 routers?
- tunneling: IPv6 datagram carried as *payload* in IPv4 datagram among IPv4 routers ("packet within a packet")
  - tunneling used extensively in other contexts (4G/5G)

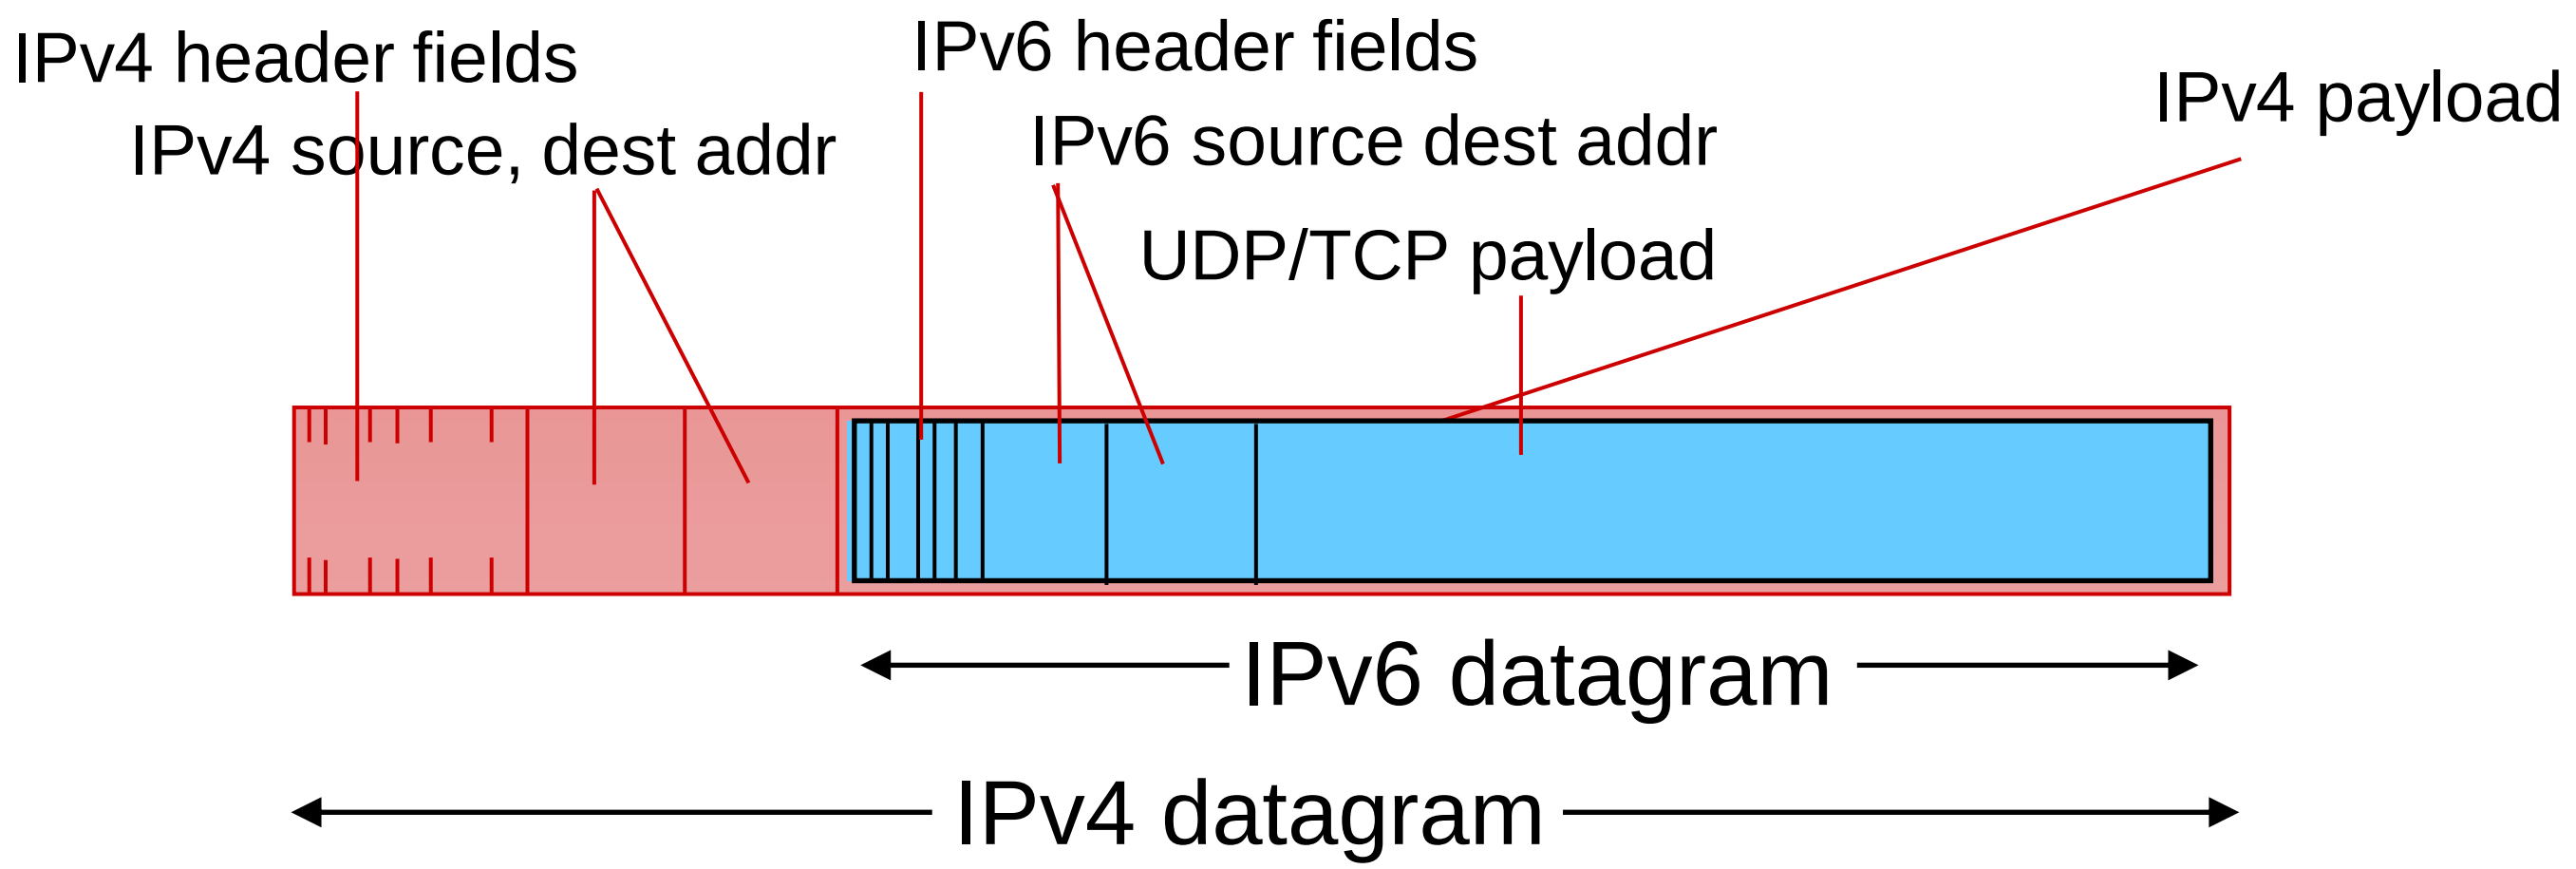

Tunneling and encapsulation

Ethernet connecting two IPv6 routers:

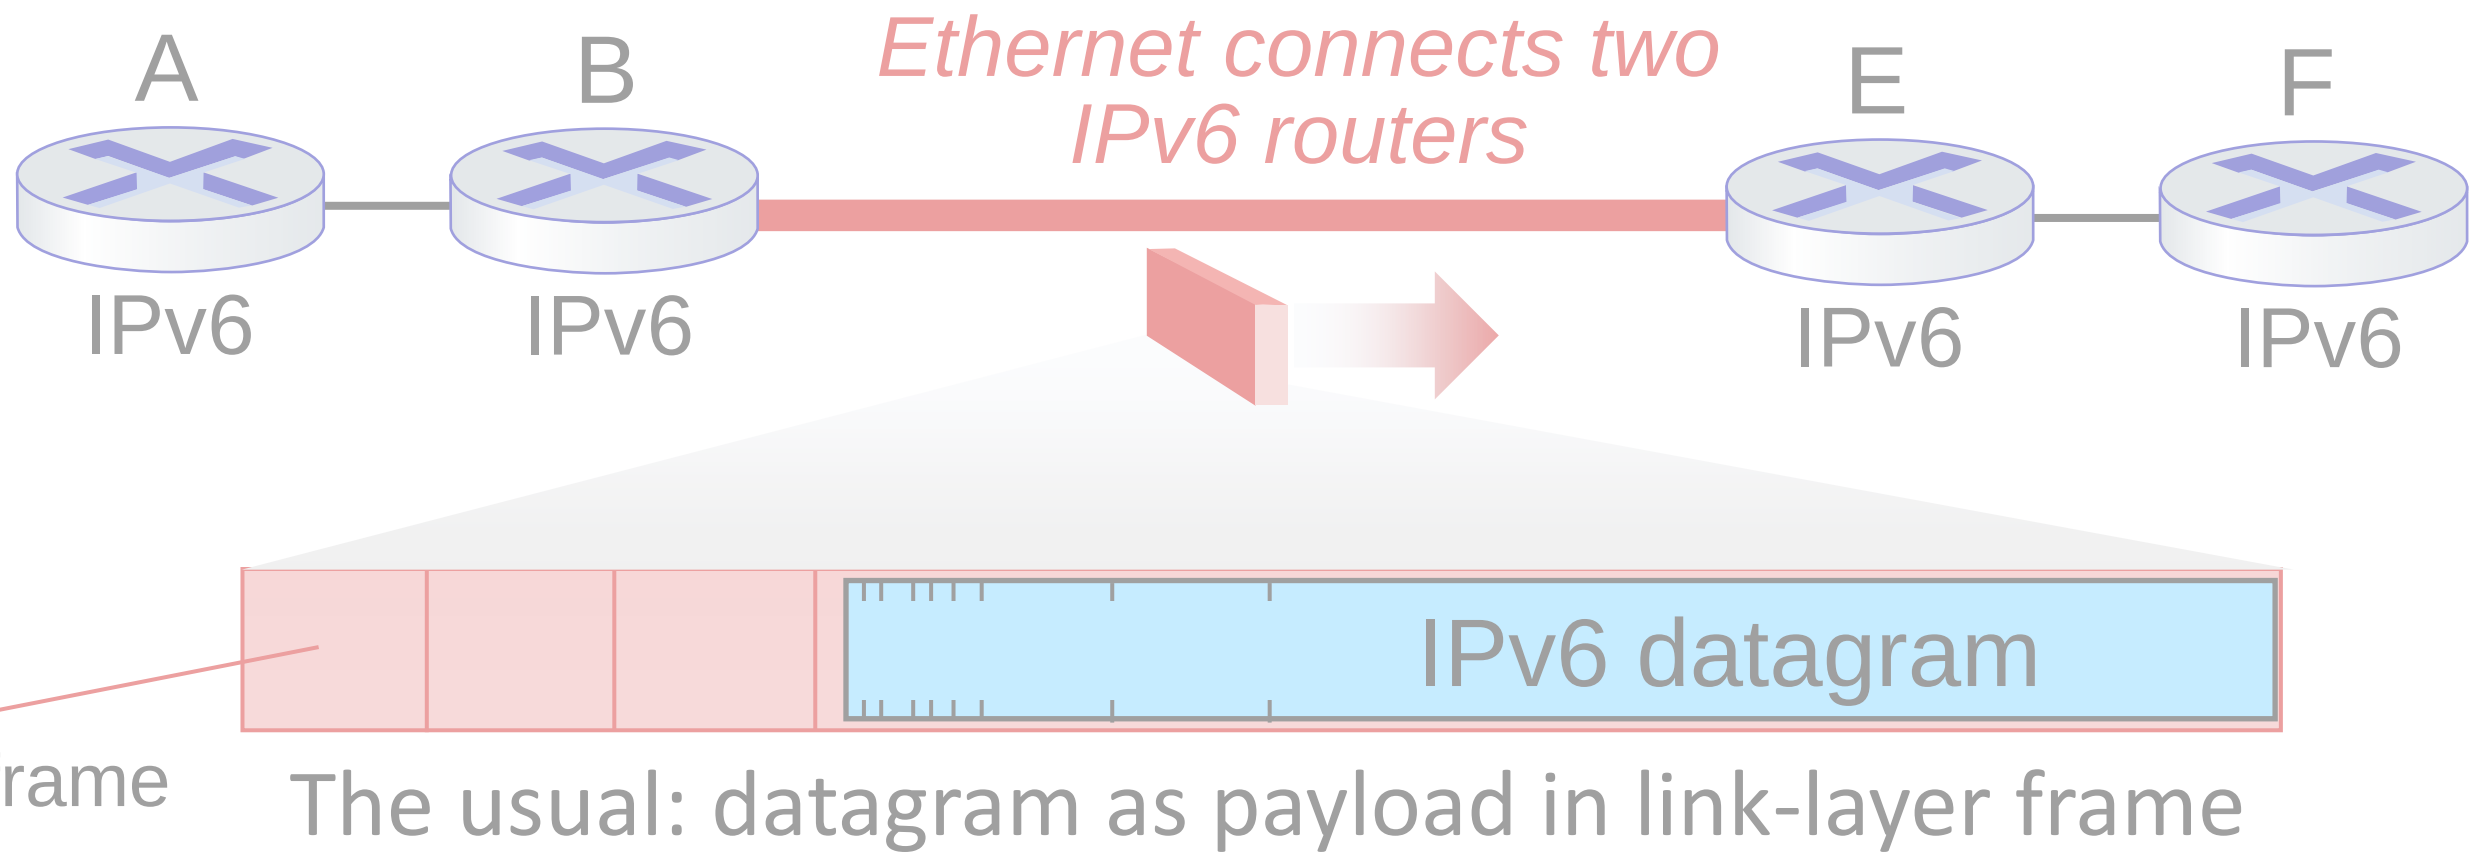

IPv4 network connecting two IPv6 routers

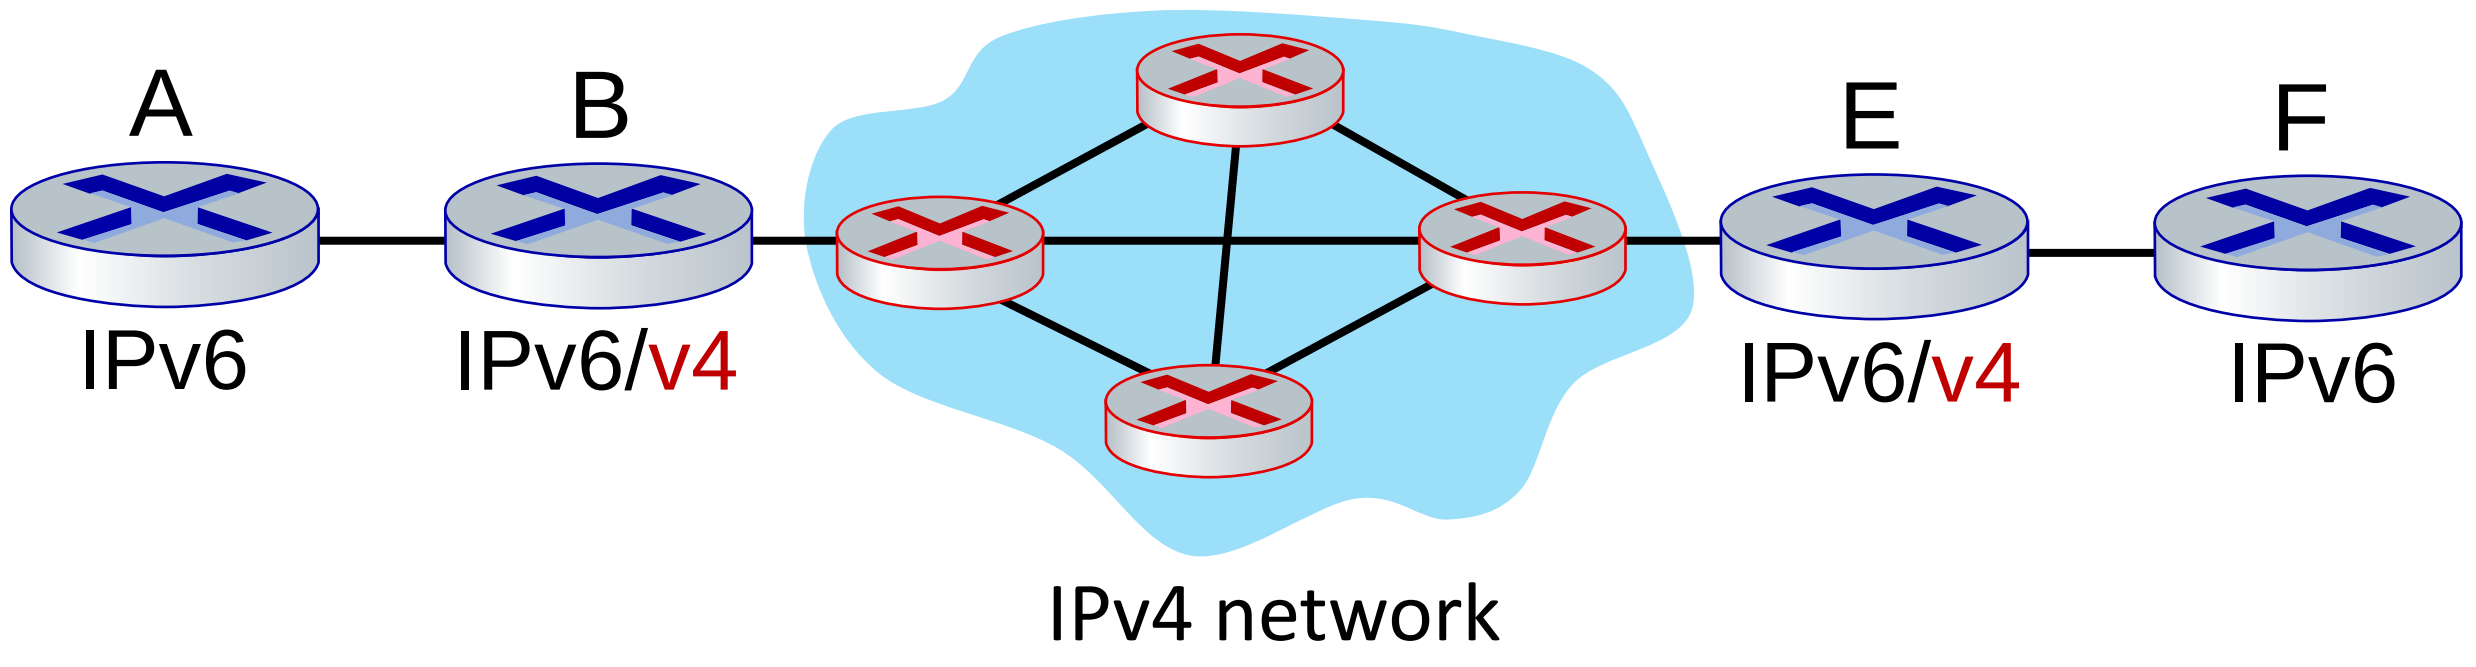

Tunneling and encapsulation

Ethernet connecting two IPv6 routers:

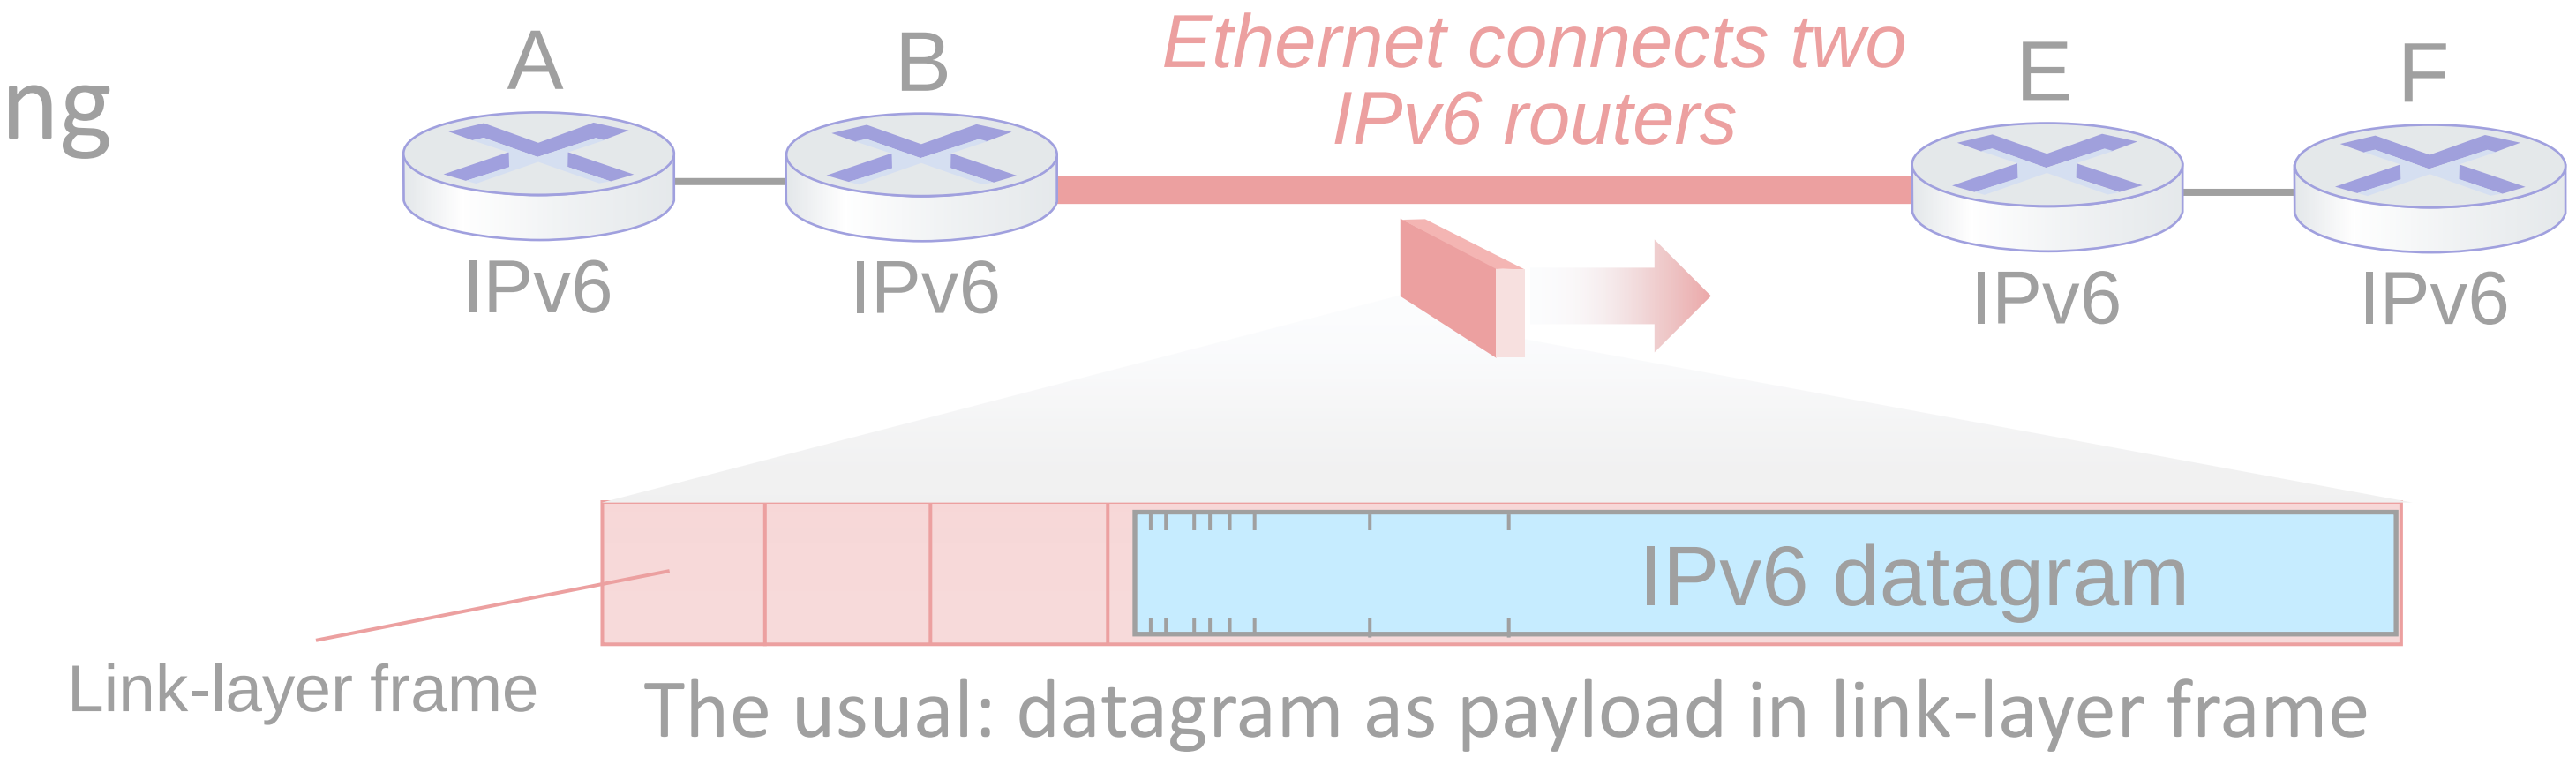

The usual: datagram as payload in link-layer frame

IPv4 tunnel connecting two IPv6 routers

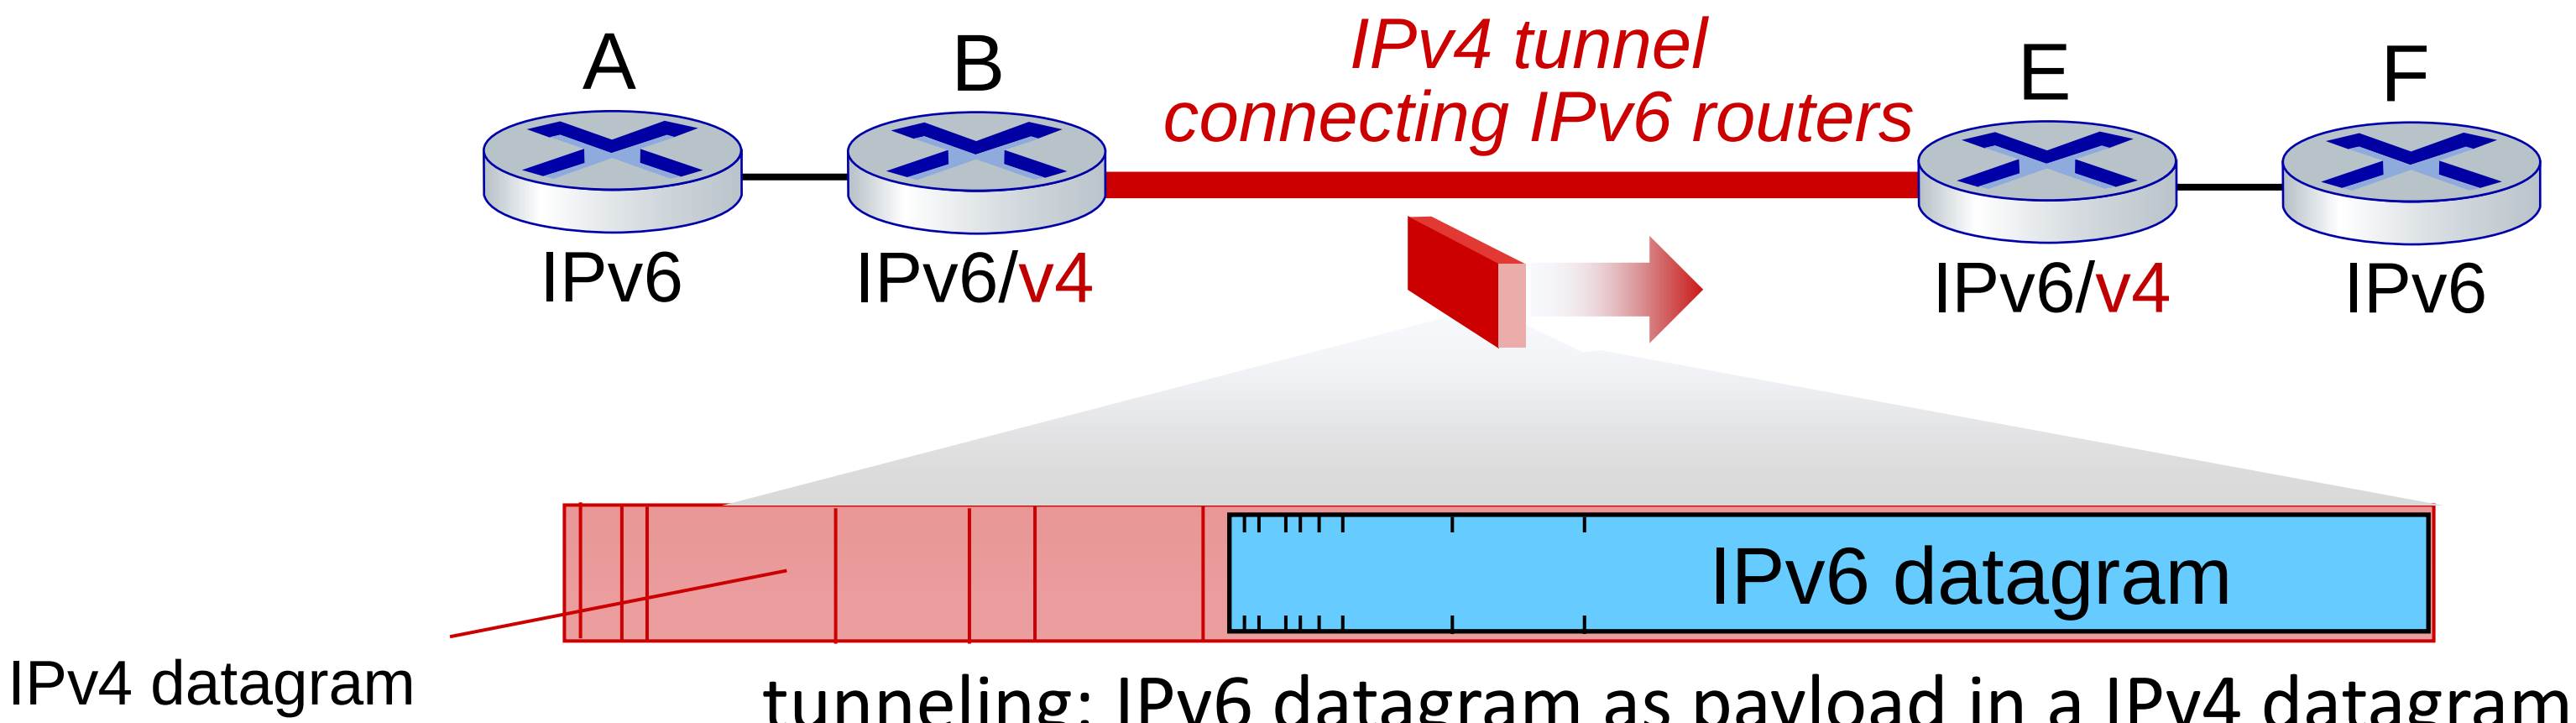

tunneling: IPv6 datagram as payload in a IPv4 datagram

Tunneling

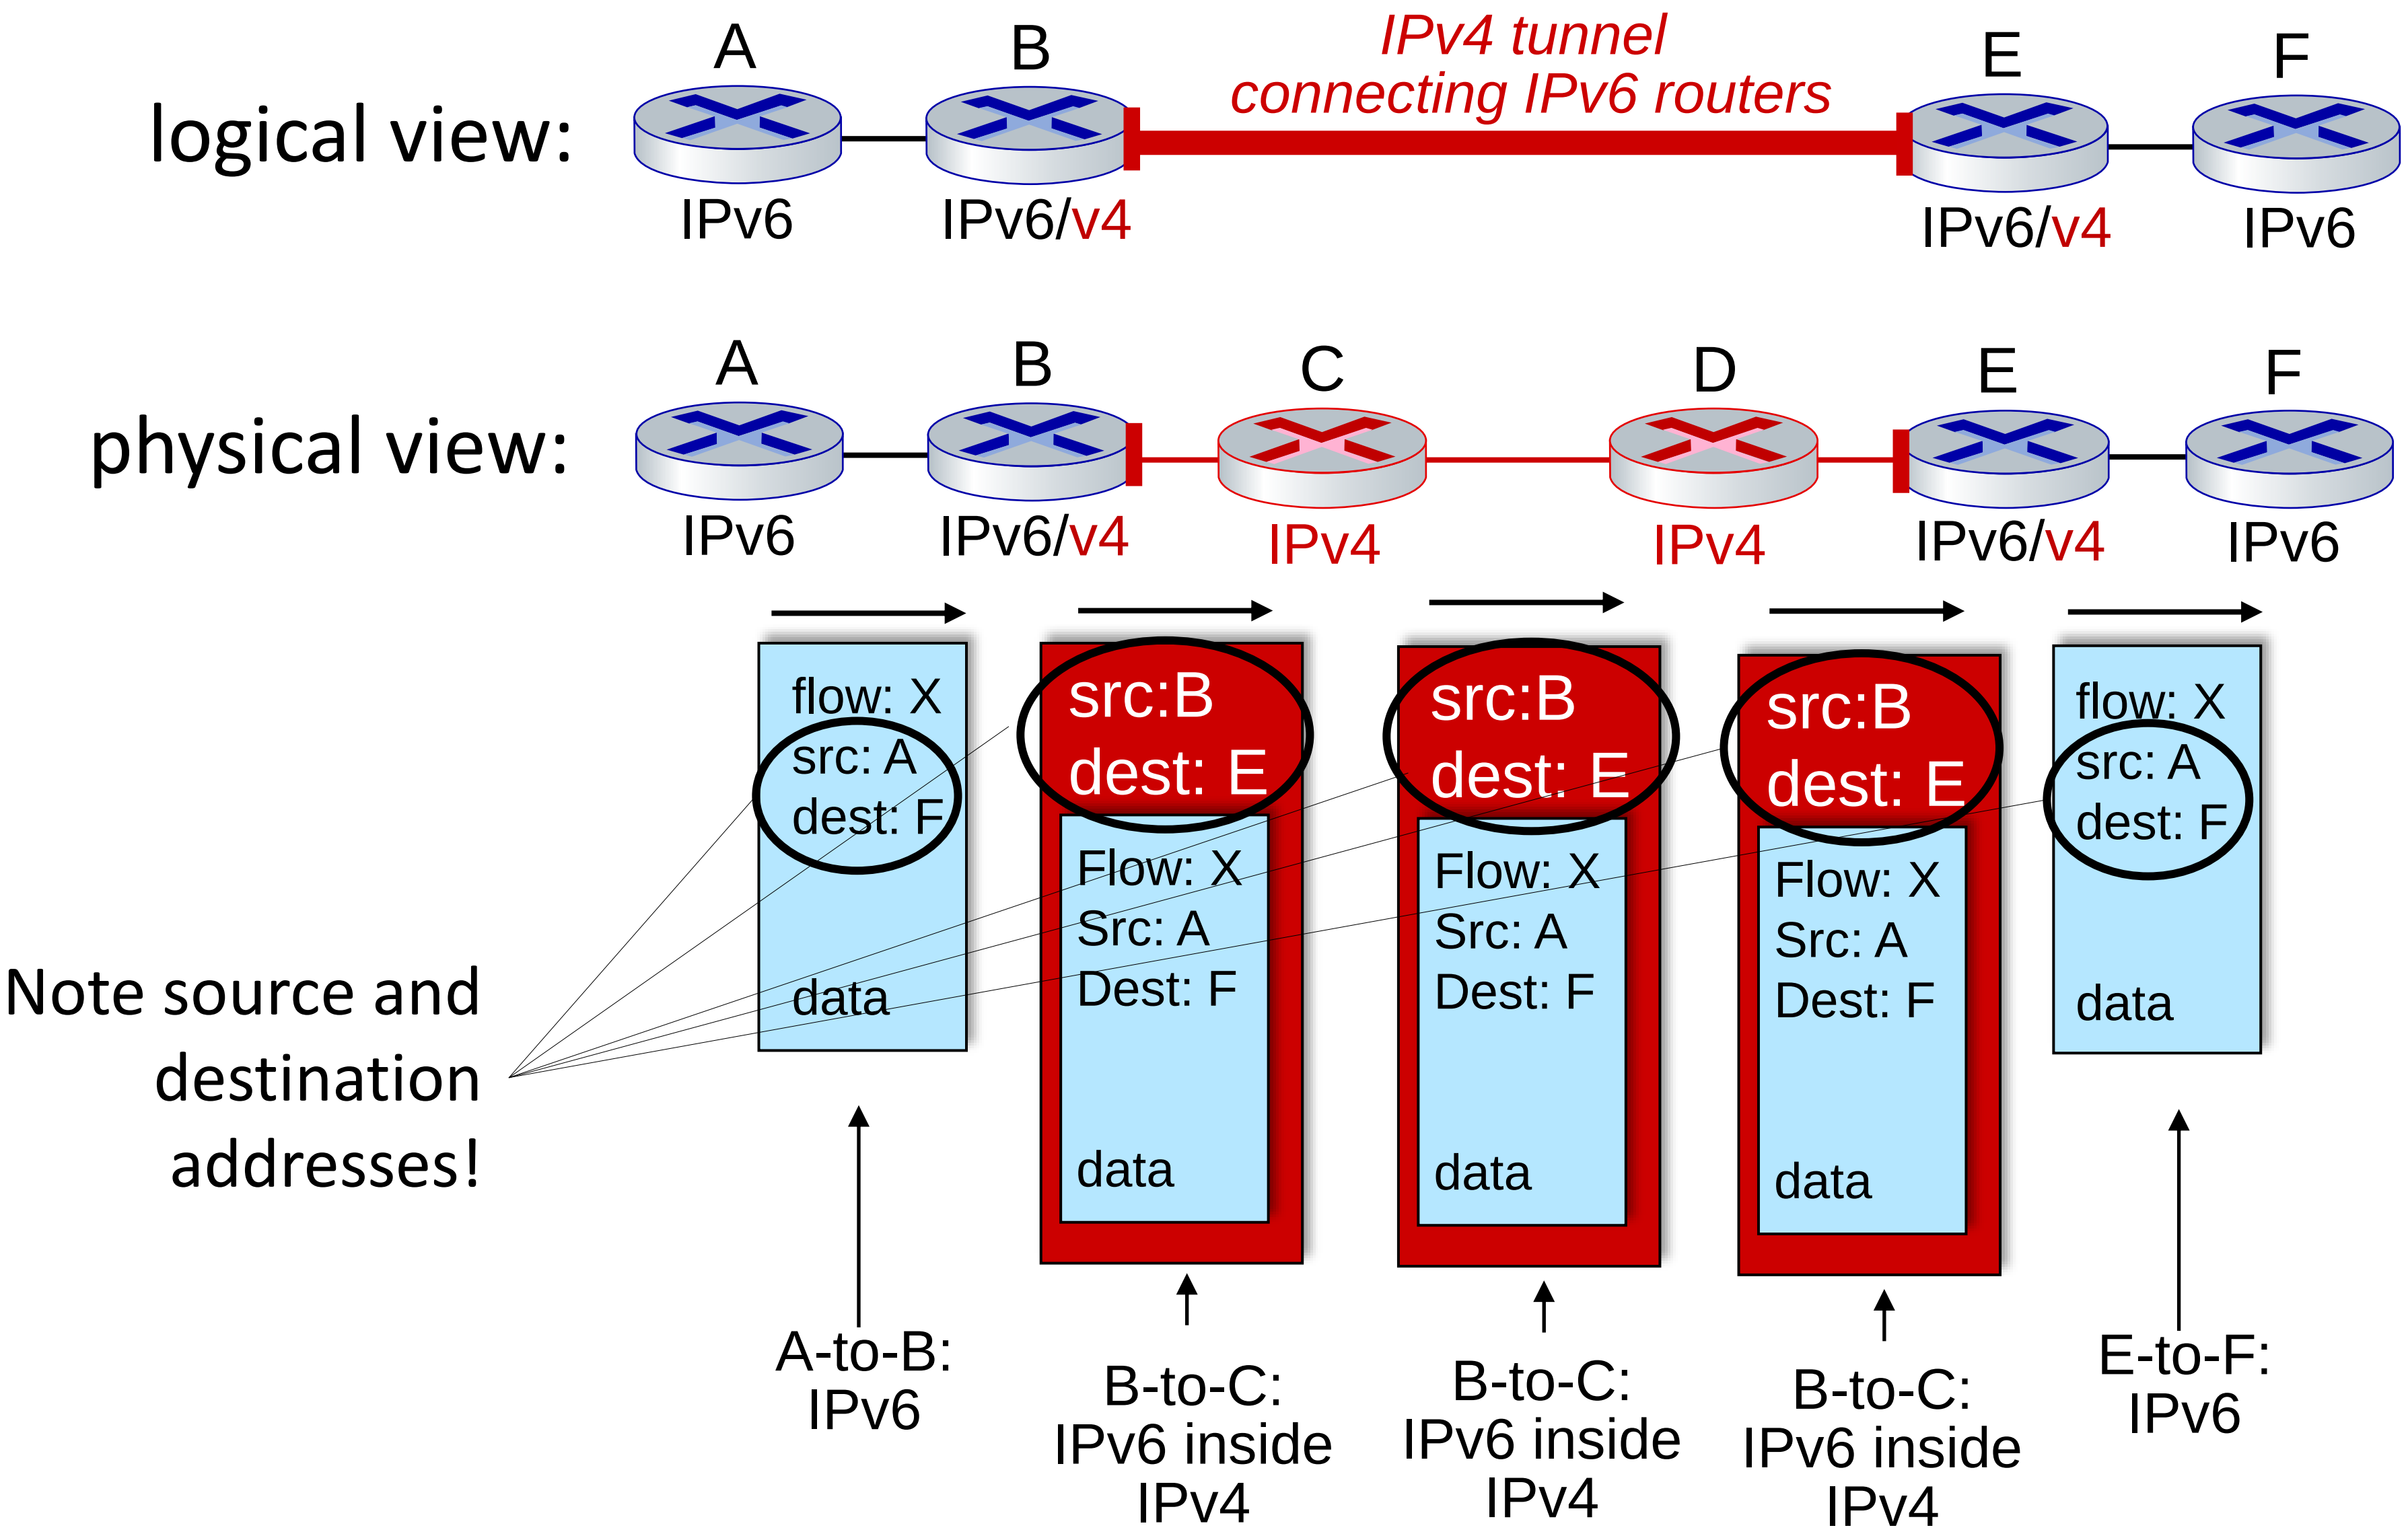
logical view:
A
B
IPv4 tunnel
connecting IPv6 routers
E
F
IPv6
IPv6/v4
IPv6/v4
IPv6
physical view:
A
B
C
D
E
F
IPv6
IPv6/v4
IPv4
IPv4
IPv6/v4
IPv6
flow: X
src: A
dest: F
data
src:B
dest: E
Flow: X
Src: A
Dest: F
data
src:B
dest: E
Flow: X
Src: A
Dest: F
data
src:B
dest: E
Flow: X
Src: A
Dest: F
data
flow: X
src: A
dest: F
data
Note source and
destination
addresses!
A-to-B:
IPv6
B-to-C:
IPv6 inside
IPv4
B-to-C:
IPv6 inside
IPv4
B-to-C:
IPv6 inside
IPv4
E-to-F:
IPv6