



CAN SWITCH BOARD

[illegible]

Version	Date	Description
0.1	2017.03.07	INITIAL




Documents	Description
BlockDiagrams	
Bill of Materials	
User's Manuals	

MICOM/MASTER

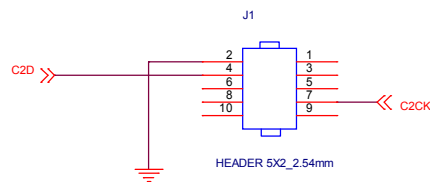
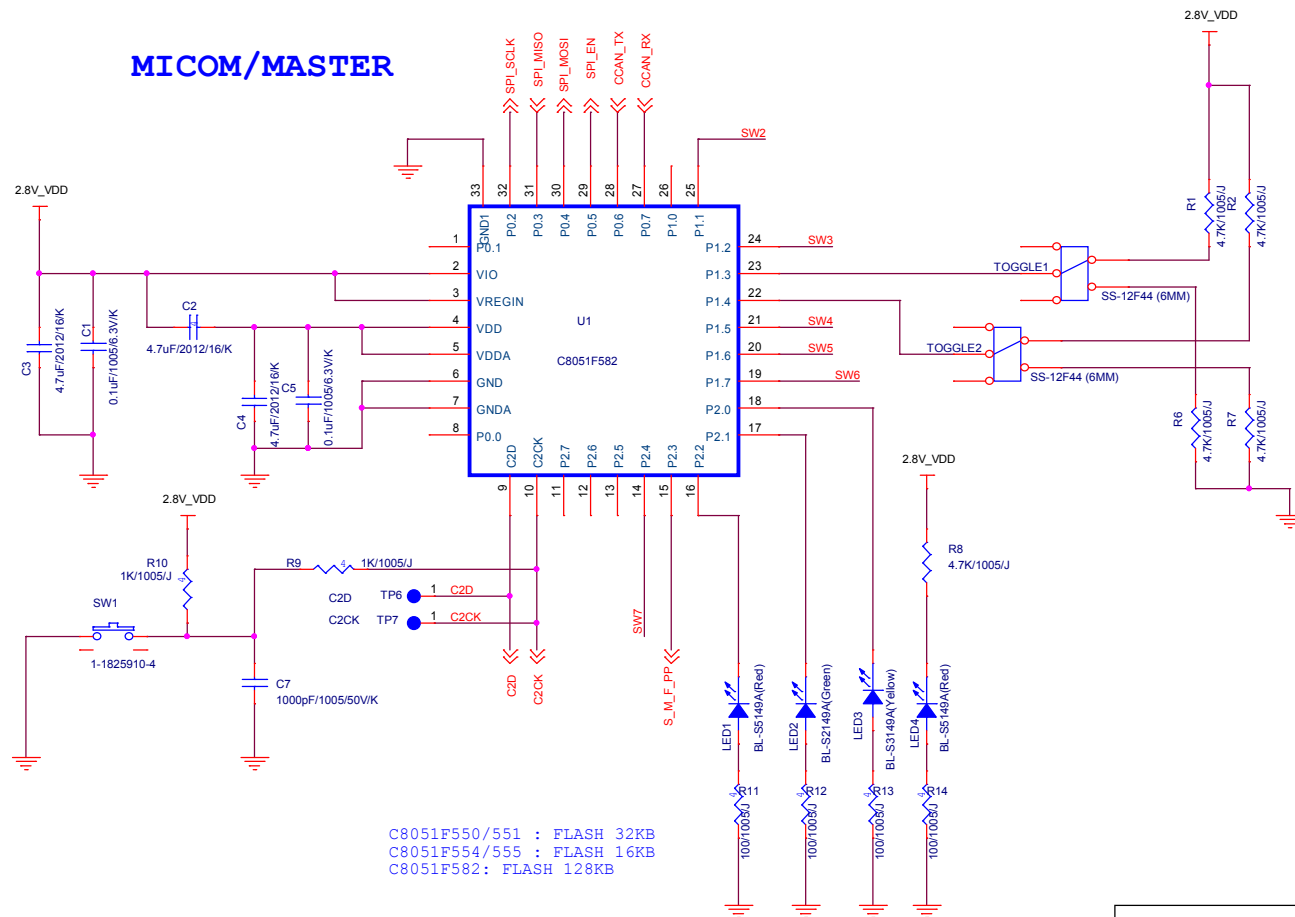


SILK
 SW1 -> HW RESET
 SW2 -> D
 SW3 -> R
 SW4 ->
 SW5 ->
 LED1 ->
 LED2 -> BUSY
 LED3 -> STATUS
 LED4 -> POWER


Serial Flash/64M

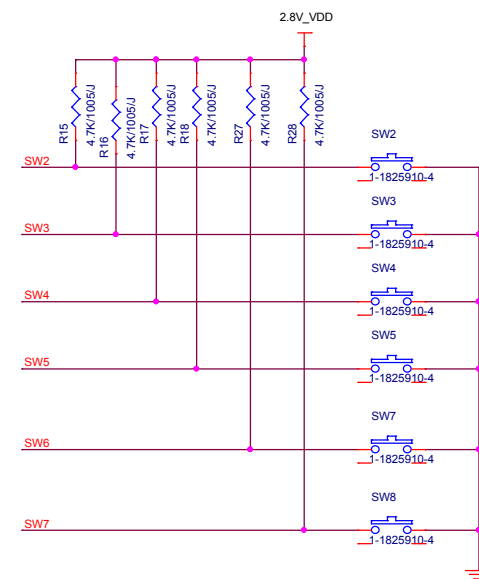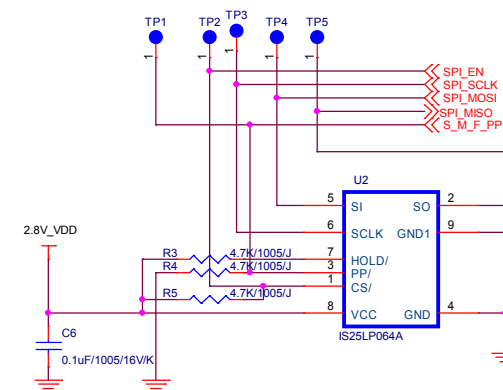


MAIN POWER INPUT

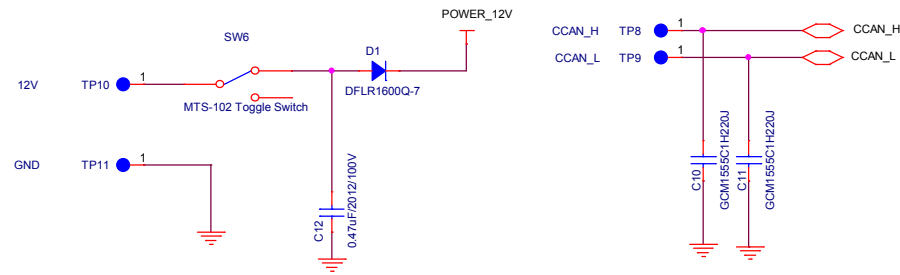


MAIN POWER / 2.8V

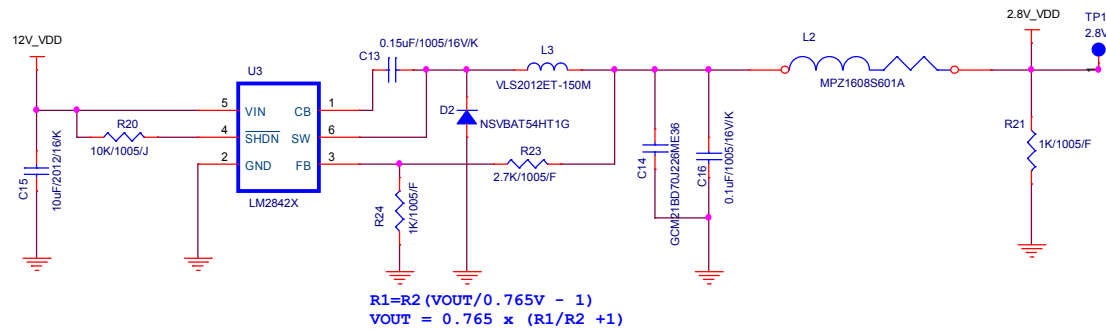

MAIN POWER / 5V

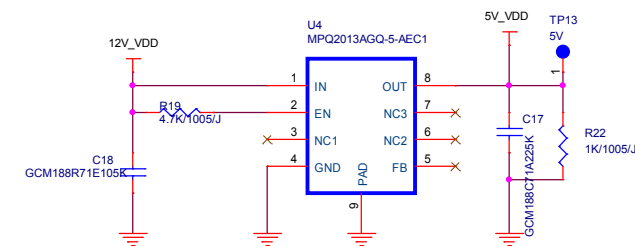

C CAN TRANCEIVER

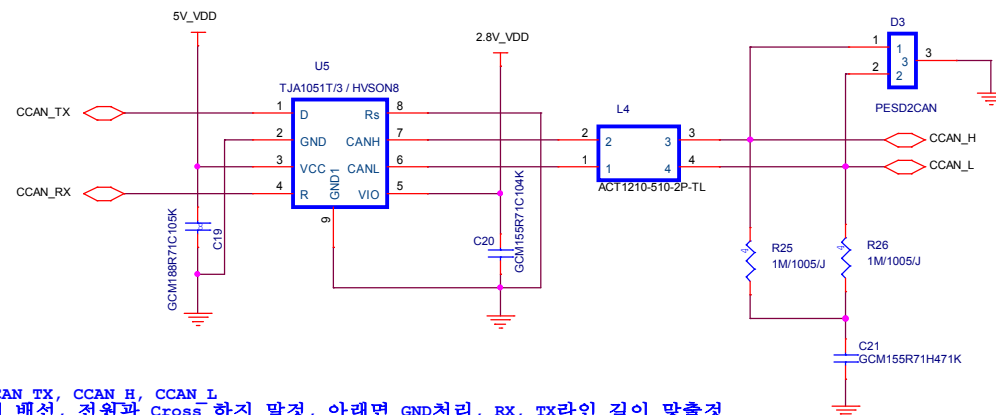

CCAN RX, CCAN TX, CCAN H, CCAN L
: 평행하게 배선, 전원과 Cross 하지 말것, 아래면 GND처리, RX, TX라인 길이 맞춤것