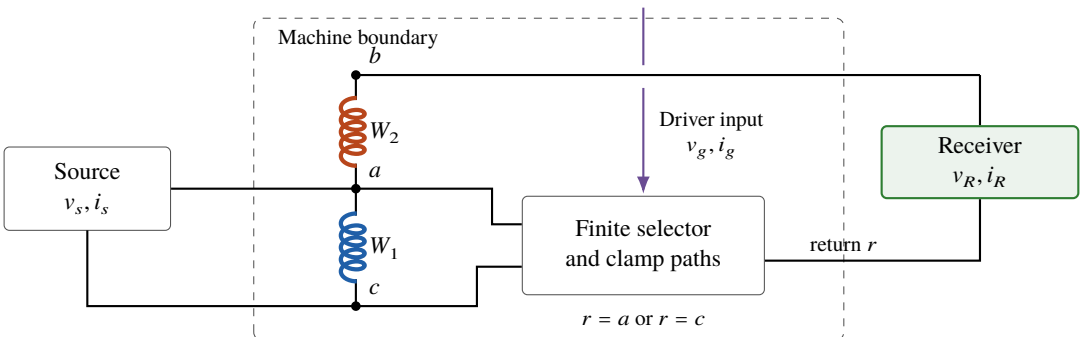
Machine boundary
b
W2
a
W1
c
Source
v_s, i_s
Driver input
v_g, i_g
Finite selector
and clamp paths
$r = a$ or $r = c$
return r
Receiver
v_R, i_R