


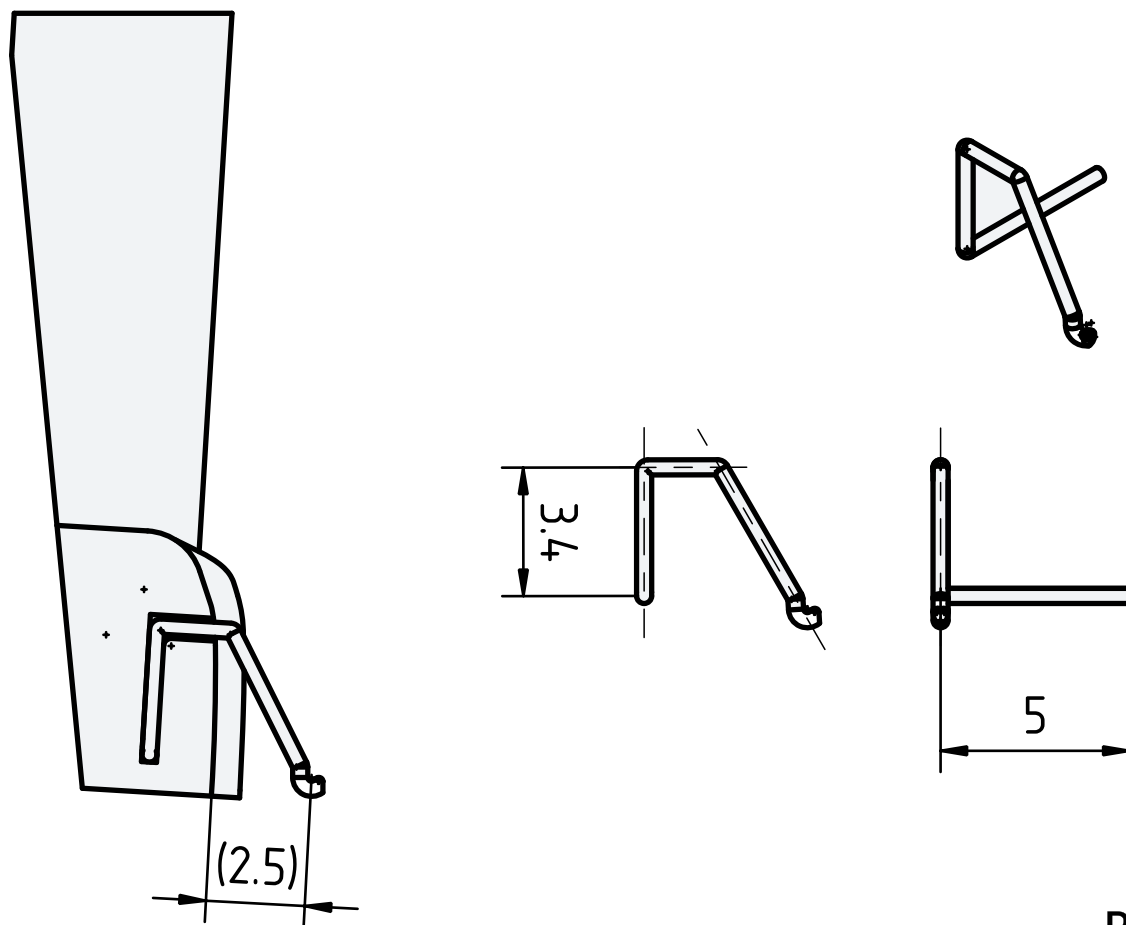

RICOHFLEX instax back

The dimensions shown are for the areas that interface with the 3D-printed parts.
If the tip of the claw is too long, it may catch the next sheet of film. Adjust the tip so that it reliably catches only one sheet at a time.

M-02	Film Claw	5:1	
Stainless Steel Spring Wire Ø0.4			
This is one of the most delicate and important parts of the mechanism. It plays a key role in advancing the film. The tip is intentionally chamfered, but except to fine-tune it during assembly.			
Ver.1.1	2026/09/05	HOCKE Morikawa	