

This is A Tribute To The Best TN of All Time

Hogan, Matthew¹ and Toki, Walter¹

January 23, 2019

¹ *Colorado State University, Fort Collins, USA*

Abstract

This is the abstract

Contents

1 PØD Event Selection And Cuts

5

1.1 The PØD 5

1.2 Global Reconstruction 7

1.3 Data Sets 8

1.4 PØD Selection Cuts 8

1.4.1 Pre-Selection Cuts 8

1.4.2 CC-Inclusive in FHC 10

1.4.3 CC-Inclusive in RHC 10

1.5 PØD Water-Out Selections 10

1.5.1 CC-Inclusive 23

1.5.2 CC-1 Track (CCQE Enhanced) 23

1.5.3 CC-N Tracks (CCnQE Enhanced) 23

1.6 PØD Water-In Selections 23

1.6.1 CC-Inclusive 23

1.6.2 CC-1 Track (CCQE Enhanced) 23

1.6.3 CC-N Tracks (CCnQE Enhanced) 23

1.7 Comparison Between Water-Out and Water-In Selections 23

References

24

Nomenclature

25

List of Figures

1.1	Cartoon of the PØD	6
1.2	Cartoon of an Individual PØDule	7
1.3	Momentum: True Particle	11
1.4	Angle: True Particle	12
1.5	Momentum: NEUT Interaction	13
1.6	Angle: NEUT Interaction	14
1.7	Momentum: True Topology	15
1.8	Angle: True Topology	16
1.9	Momentum: True Particle	17
1.10	Angle: True Particle	18
1.11	Momentum: NEUT Interaction	19
1.12	Angle: NEUT Interaction	20
1.13	Momentum: True Topology	21
1.14	Angle: True Topology	22

List of Tables

1.1 PØD WT FV and Corridor Definition 10

1 PØD Event Selection And Cuts

This section describes the development of ν_μ and $\bar{\nu}_\mu$ CC-Inclusive selections in both FHC and RHC beam configuration for PØD-based analyses. These selections are the continuation of previous works that developed ν_μ CC-Inclusive selections between the PØD and TPC1. The first such analyses were T2K-TN-80 and T2K-TN-100 which described the ν_μ CC-Inclusive event selection and, later, cross-section analysis using ND280 Production 5 software, respectively[2, 3]. These analyzes relied on each sub-detector’s reconstruction software and developed a track matching algorithm since the ND280 “Global” reconstruction matching was problematic in Production 5. As the inter-detector matching reconstruction improved in “Global”, two CC-0 π cross section analyzes, T2K-TN-258 and T2K-TN-328, were developed that also used the CC-Inclusive selection as pre-selection cuts[7, 1]. The selections described in this technical note also employ the same pre-selection cuts. What follows from here in this section is a layout of the following topic discussions.

The first topic discussed in this section is a description of the π^0 Detector (PØD). The next topic is the event reconstruction using the “Global” reconstruction software. Following that is the pre-selection cut flow. With the pre-selection cuts established, each of the three CC-Inclusive selection’s cut flow is described. Concluding this section is a discussion of the three samples in the following order: ν_μ in FHC mode, $\bar{\nu}_\mu$ in RHC, and ν_μ in RHC.

1.1 The PØD

The PØD, short for π^0 Detector, is a plastic scintillator based tracking calorimeter inside the ND280 basket. The PØD is constructed as many sandwiches of active and inactive materials designed to fully contain π^0 decay photons. The four primary regions inside the PØD in order of upstream to downstream of the neutrino beam are the upstream ECal (USECal), upstream water target (WT), central WT, and central ECal (CECal). A representation

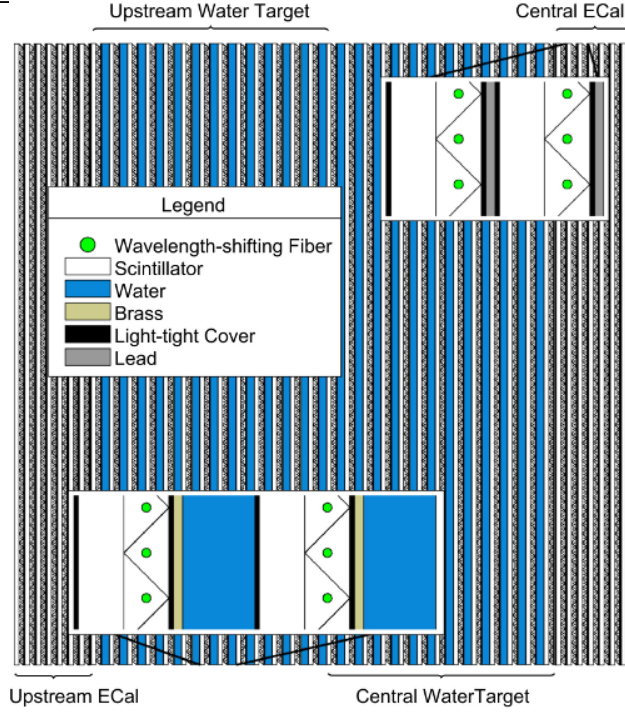


Figure 1.1: This cartoon illustrates the concept design of the PØD where the neutrino beam is approaching from the left.

of the entire PØD can be seen in Figure 1.1. Each active module, also called a PØDule, consists of two orthogonally oriented sheets of triangular, scintillator-doped plastic bars as shown in Figure 1.2. The ECal regions are designed to contain decay photons inside the PØD by alternating the scintillator planes with lead sheets. The WT regions, as compared to the lead sheets in the ECals, alternate a thin brass sheet and water filled bags between the PØDules. A unique feature of the PØD is that the water can be drained out resulting in two detector configurations: water-in and water-out.

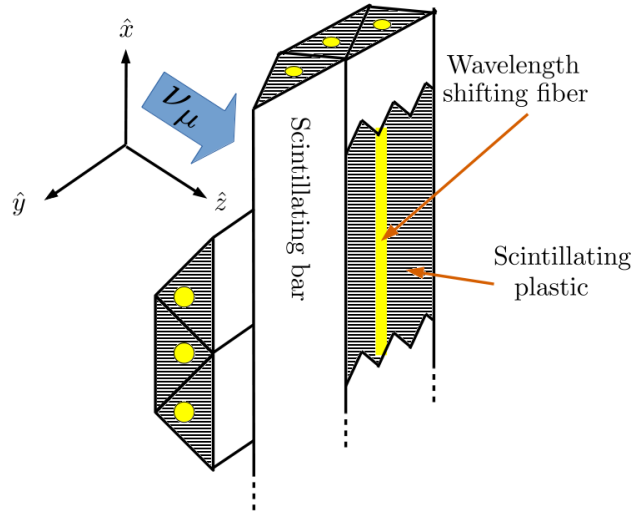


Figure 1.2: This cartoon illustrates the design of a PØDule with orthogonal layers of scintillating, triangular bars. When a charged particle travels through the bar such as a muon from CC interaction, the scintillation light is captured and wavelength shifted inside a fiber bored in the center of each bar. The wavelength shifted light is later observed by a photon counter.

1.2 Global Reconstruction

The task of the Global reconstruction is to combine ND280 sub-detector reconstruction into an single reconstructed object. It was originally designed to analyze “CCQE-like” events in the Tracker region and has been extended with all of ND280. Global attempts to match and re-fit individual sub-detector objects using a Kalman filter while correcting for energy loss and multiscattering. A vertex associated with the re-fit object is also extracted using a different Kalman filter. A detailed description of the track matching and vertex finding algorithms for Global is described in T2K-TN-46[6].

1.3 Data Sets

1.4 PØD Selection Cuts

The selection of CC-Inclusive events use a series of cuts to select the primary lepton. The pre-selection cuts (“precuts”) are applied first to extract events that start in the PØD FV. A MIP is more likely to reach TPC1 from the PØD FV since the PØD is constructed out of heavy materials especially in the CECal. So the main track each selection is designed to select a muon.

This following sections will describe the precuts common to all CC-Inclusive selections and the branching of different cuts, after the precuts, to select the main track.

1.4.1 Pre-Selection Cuts

The pre-selection (“precuts”) were initially developed to select ν_μ CC-Inclusive using the PØD and TPC sub-detector reconstruction softwares separately[2]. They were then used with the Global reconstruction software for the ν_μ CC-0 π selection in the FHC beam configuration as described in technical note T2K-TN-258[7]. The description and flow of the precuts are described here as well since there is an incomplete description of the selection precuts.

The precuts are performed on each bunch per beam spill as follows

1. The event has a “good” data quality flag.
 - An event is rejected if any sub-detector or electronics in ND280 reported as “bad” during that bunch.
2. There is at least one (1) track reconstructed in TPC1.
 - There are no restrictions on the number of tracks fully contained in the PØD or exiting into other sub-detectors.

105 3. The track in TPC1 must have more than 18 nodes.

- 106 • The TPC reconstruction gathers vertical and horizontal hits into clusters of hits.
107 The charge distribution of the cluster is used to get a vertical (horizontal) position
108 that is more accurate than the individual readout pads. A node is constructed
109 out of each cluster with associated track state information. The set of nodes are
110 used to fit the track helix[5].

111 4. The reconstructed vertex is within the PØD WT FV.

- 112 • The PØD FV is defined to include as much as the WT regions as possible. Its
113 X and Y borders are 25 cm away from the PØDule edges while its Z borders
114 intersect the last and first half downstream PØDule in the USECal and CECal,
115 respectively. The enumerated volume edges are shown in Table 1.1. This volume,
116 while used for track-based analyzes in the past, was optimized for π^0 and ν_e
117 analyzes[4].

118 5. All tracks that enter TPC1 pass the veto cut

- 119 • An event is rejected if any PØD track enters TPC1 from outside the “corridor”
120 volume. This cut was designed to eliminate broken tracks between the PØD and
121 TPC1 when the separate sub-detector reconstructions were used[2]. In practice,
122 this cut ensures that Global tracks entering TPC1 away from its X and Y edges.
123 The corridor definition is the same as defined in T2K-TN-208 and shown in Table
124 1.1.

PØD WT FV			Corridor Volume		
-836	< X <	764	-988	< X <	910
-871	< Y <	869	-1020	< Y <	1010
-2969	< Z <	1264	-3139	< Z <	-900

Table 1.1: The PØD WT FV (left) and veto corridor volume (right) in the ND280 coordinate system. The corridor spans from the 5th (8th) to 40th (80th) PØDule (scintillator layer). All the units are given in millimeters.

After passing all the precuts, a single, global track, which is observed in TPC1, is assigned as the “main track” of a selection. The main track for ν_μ selections is the highest momentum, negatively-charged track (HMNT). Similarly the highest momentum, positively-charged track (HMPT) is assigned the main track for $\bar{\nu}_\mu$ selections.

This concludes the application of precuts to all the CC-Inclusive selections. The following subsections describe the CC-Inclusive selection cuts, first in FHC mode and then RHC mode.


1.4.2 CC-Inclusive in FHC

As discussed in the Section 1.4.1, this selection is the basis for the ν_μ CC-0 π PØD+TPC1 analysis. This is FHC mode selection and so the lack of a negatively charged track is the final cut for the CC-Inclusive selection.


1.4.3 CC-Inclusive in RHC

1.5 PØD Water-Out Selections


Look for me!!!

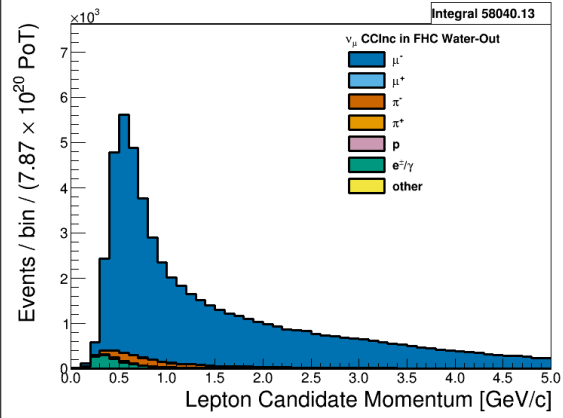


(a) Nominal MC

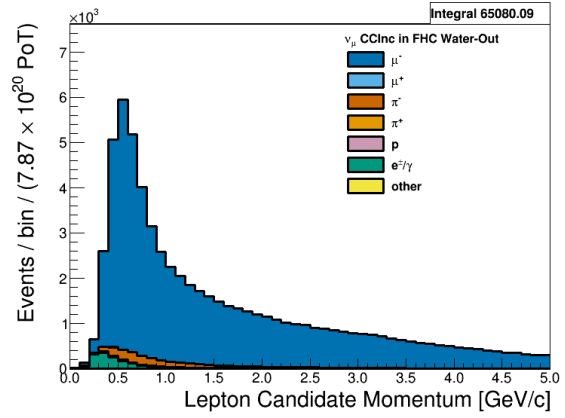

(b) Flux

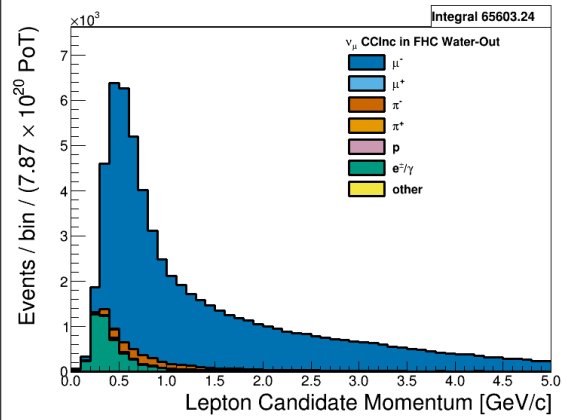


(c) Systematics

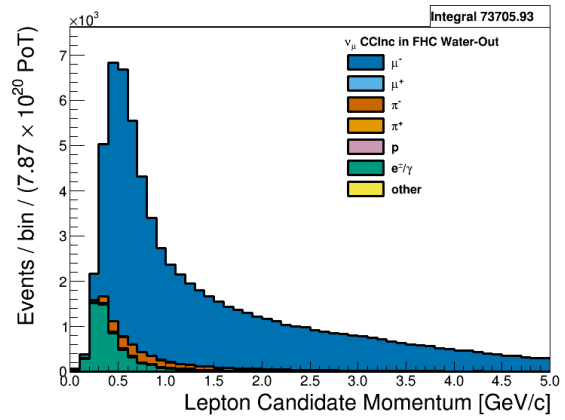


(d) Flux + systematics


Figure 1.3: Momentum: True Particle

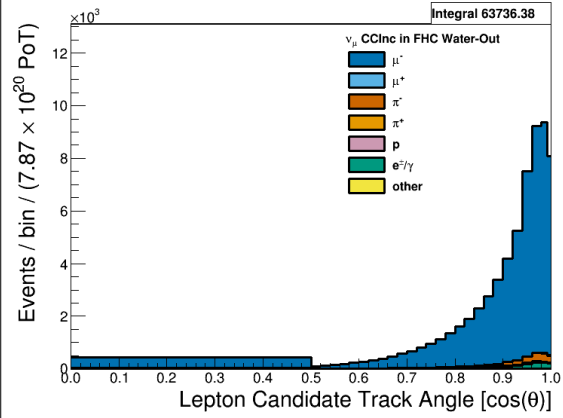


(a) Nominal MC

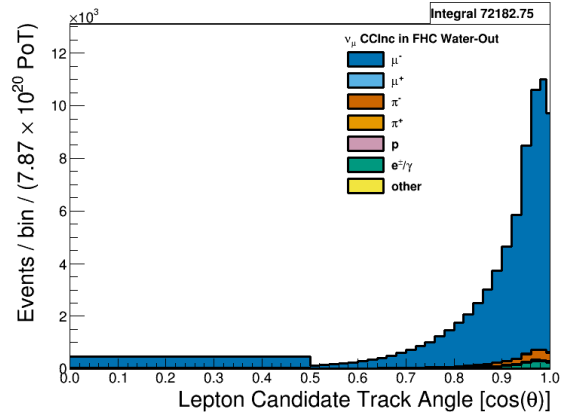

(b) Flux

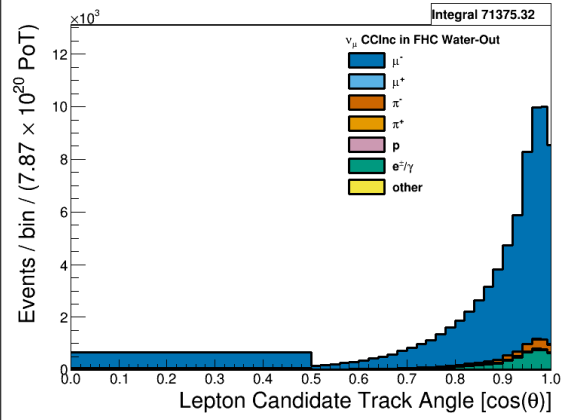

(c) Systematics

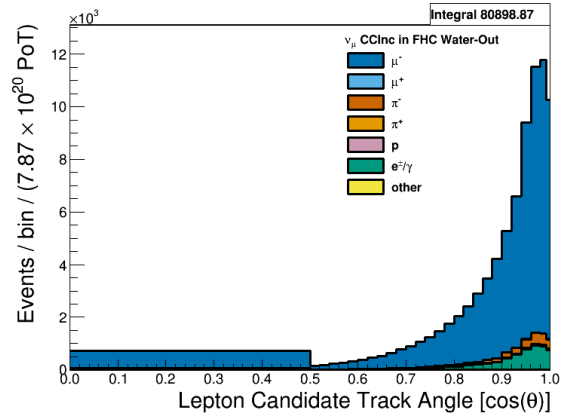

(d) Flux + systematics

Figure 1.4: Angle: True Particle



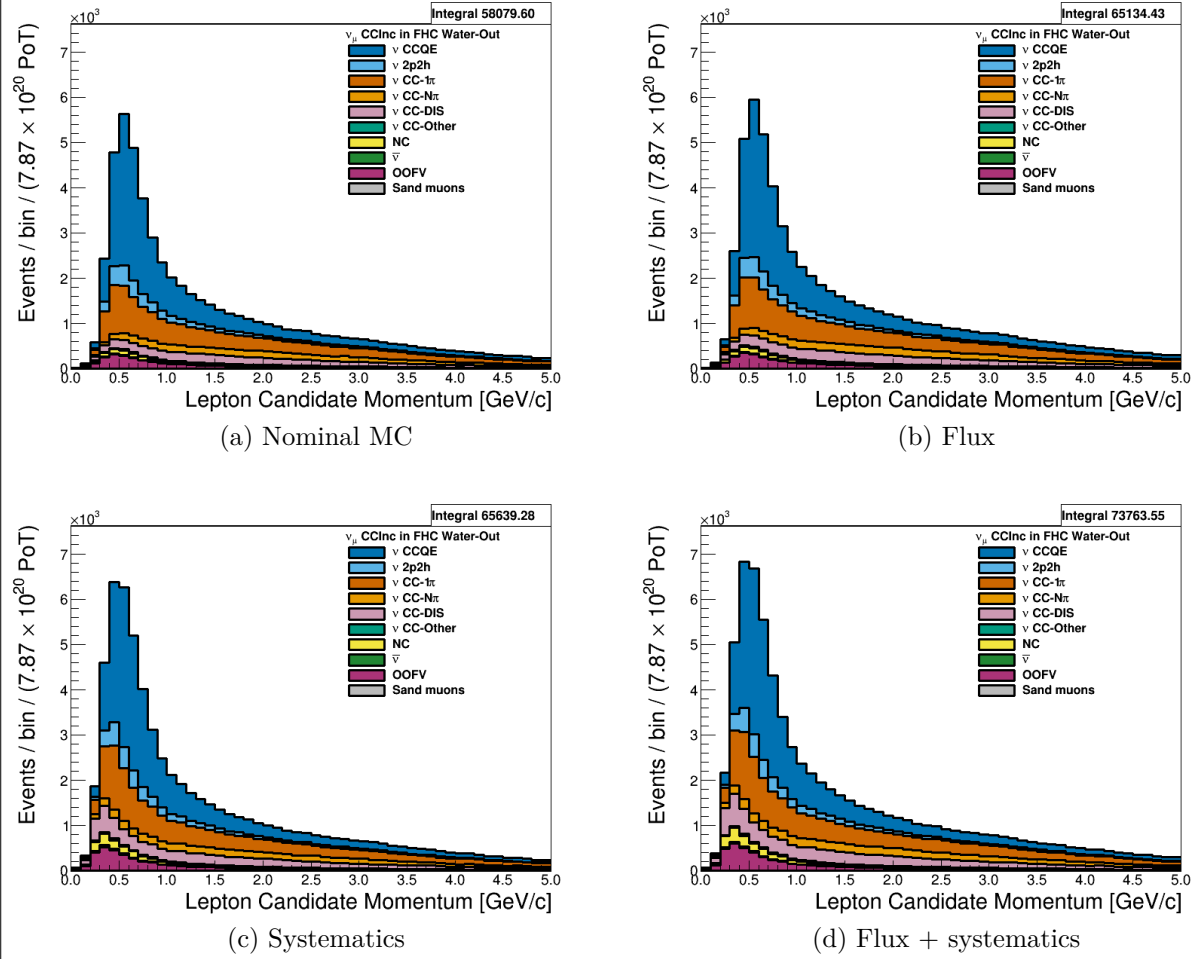



Figure 1.5: Momentum: NEUT Interaction

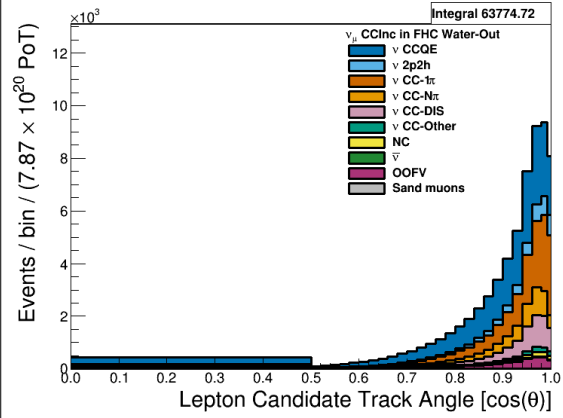


(a) Nominal MC

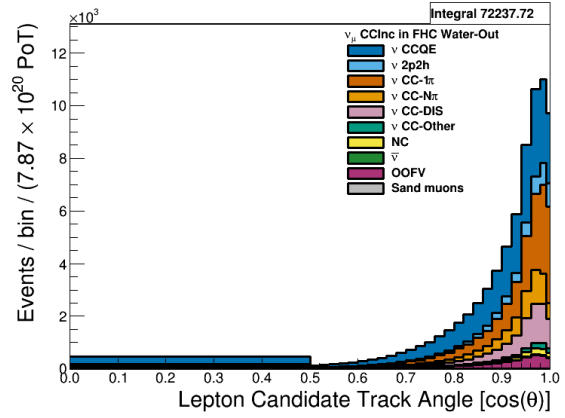

(b) Flux

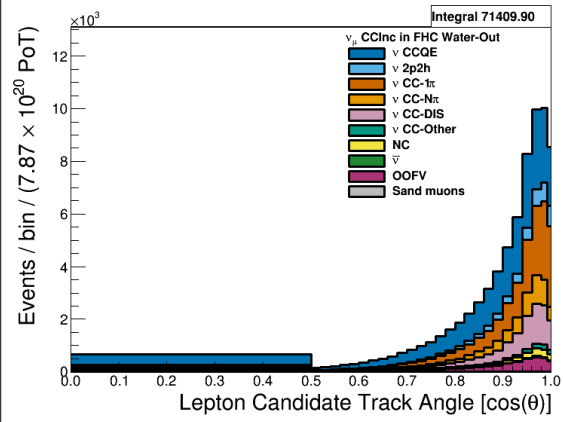

(c) Systematics

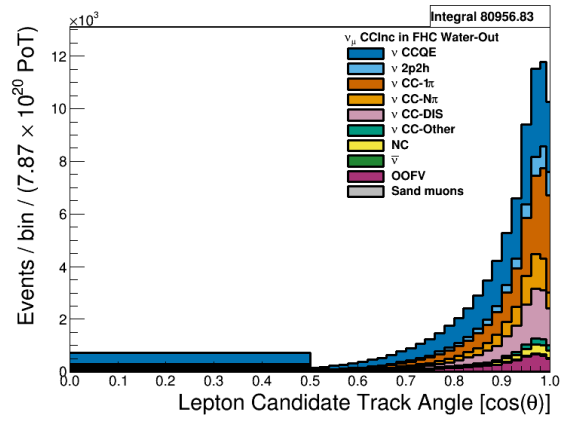

(d) Flux + systematics

Figure 1.6: Angle: NEUT Interaction

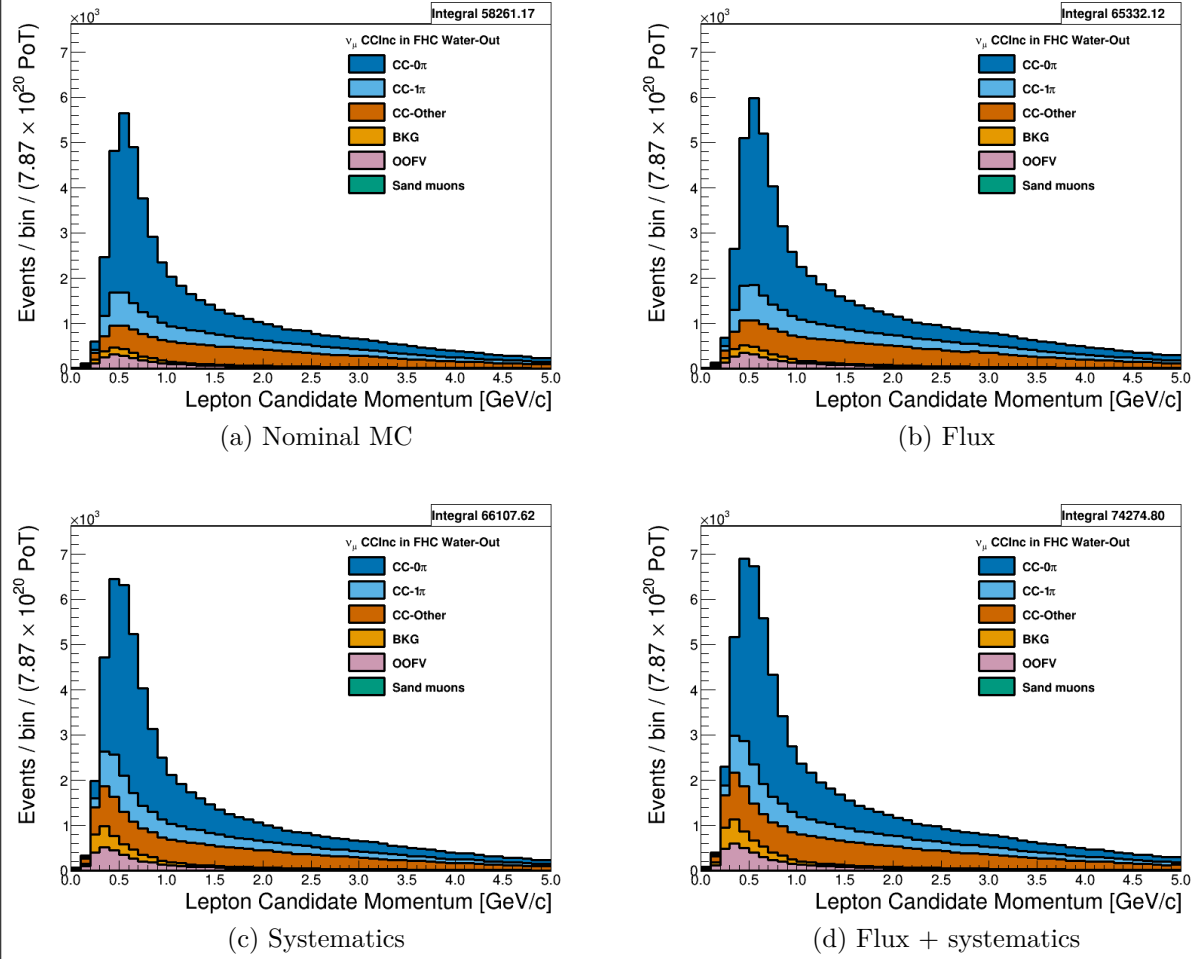


Figure 1.7: Momentum: True Topology

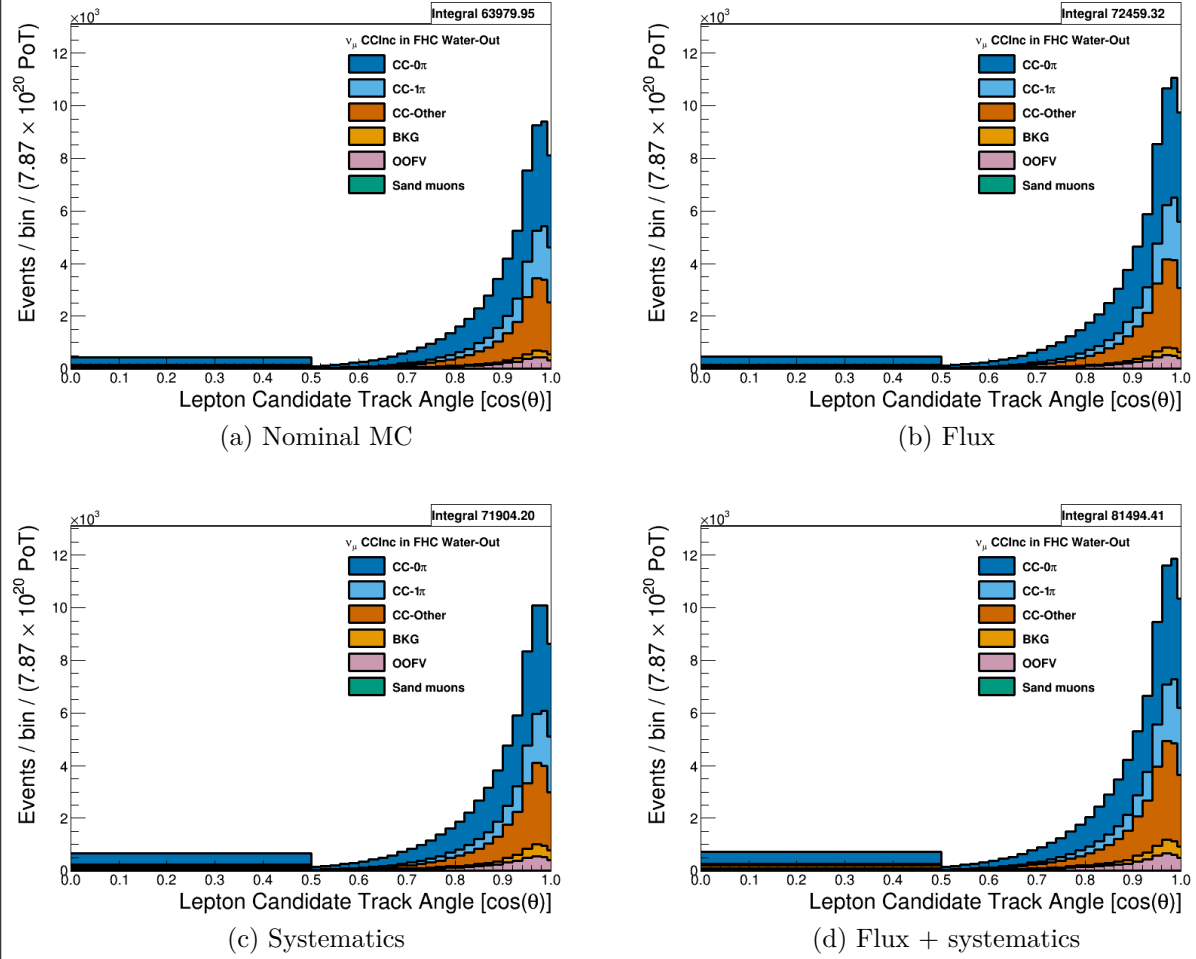


Figure 1.8: Angle: True Topology



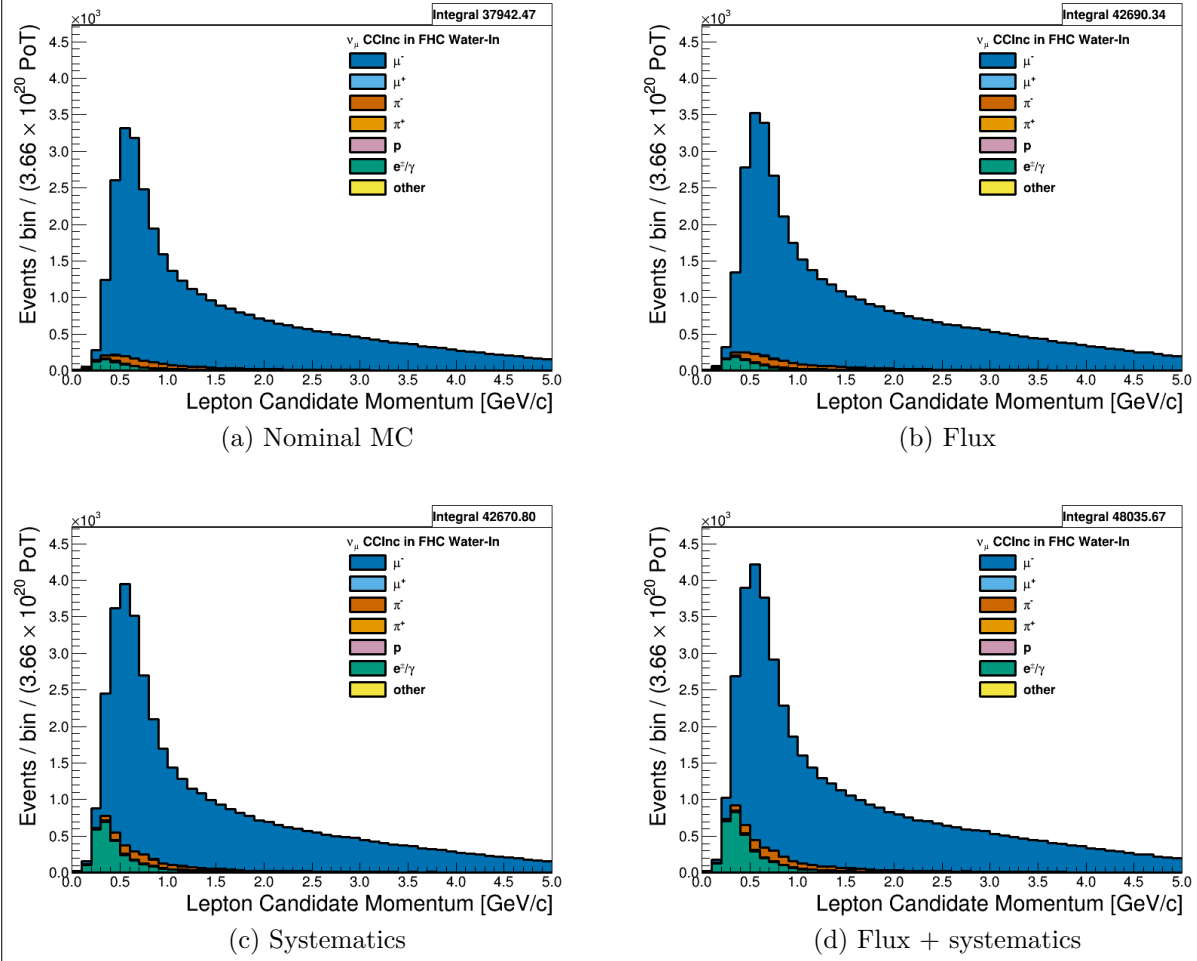



Figure 1.9: Momentum: True Particle

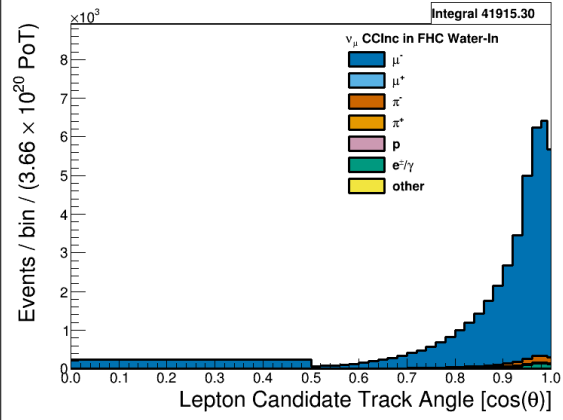


(a) Nominal MC

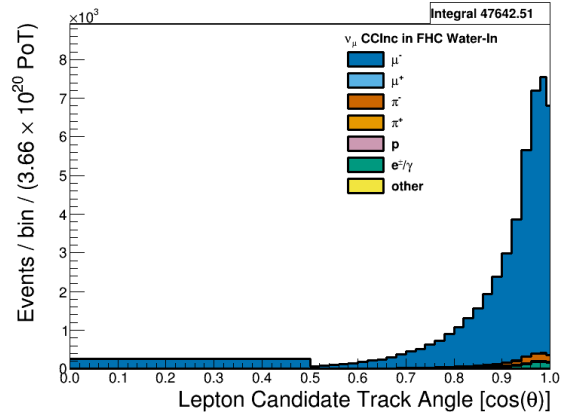

(b) Flux

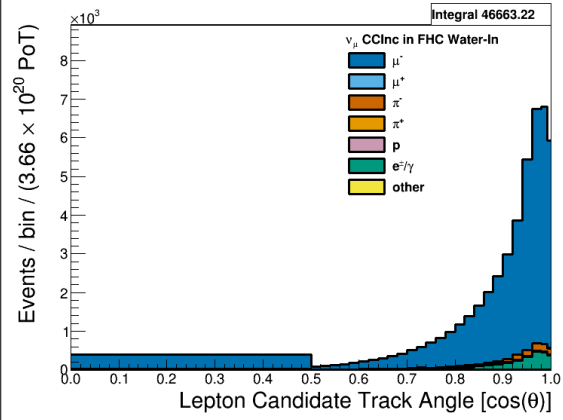

(c) Systematics

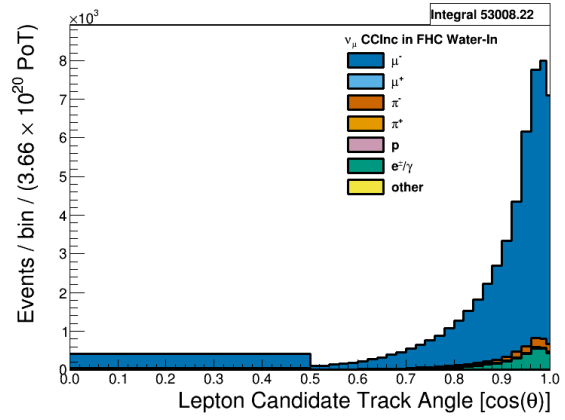

(d) Flux + systematics

Figure 1.10: Angle: True Particle



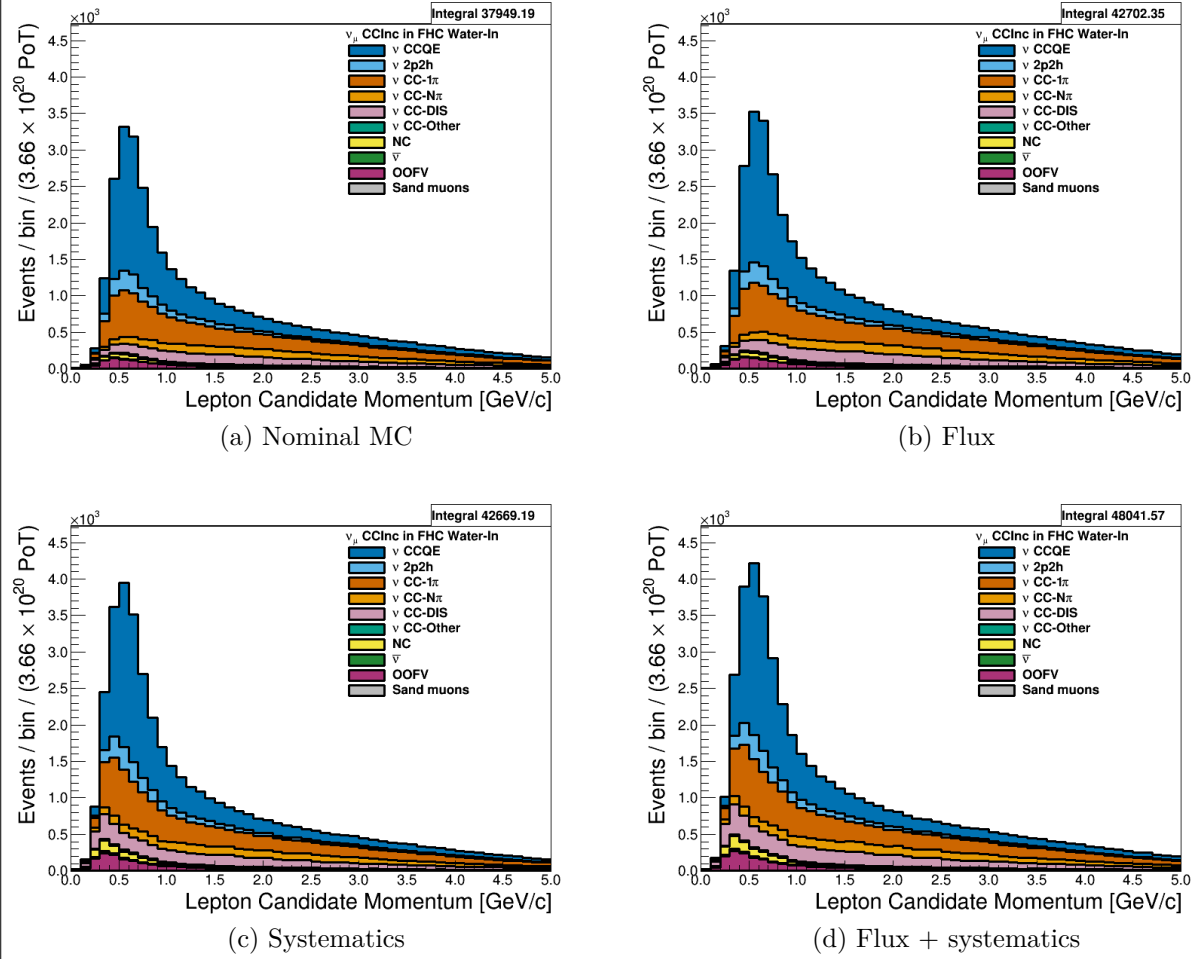



Figure 1.11: Momentum: NEUT Interaction

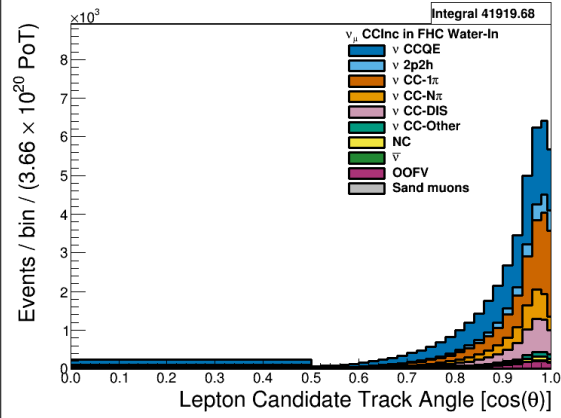


(a) Nominal MC

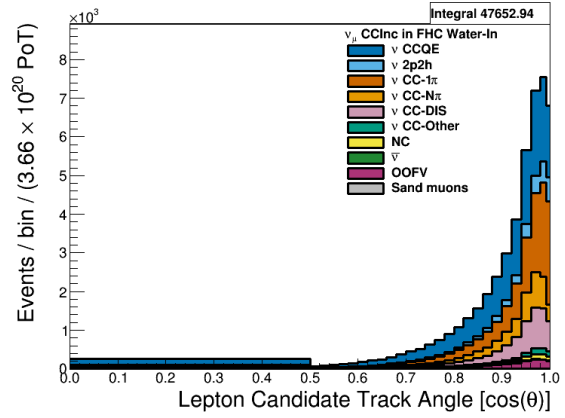

(b) Flux

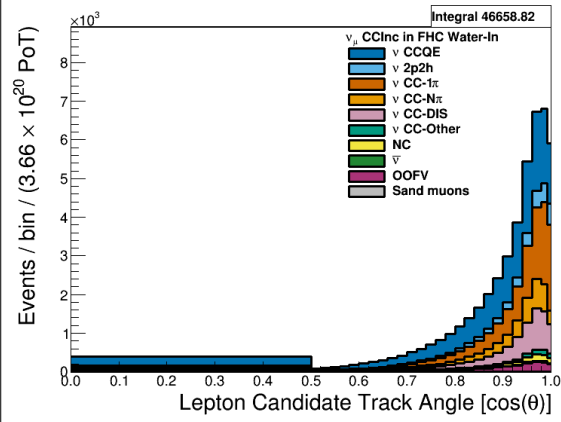


(c) Systematics

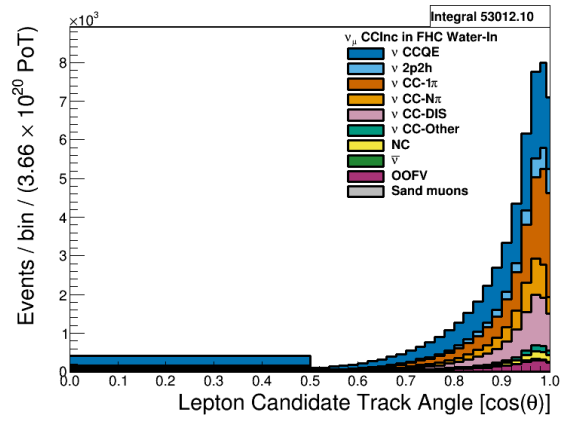


(d) Flux + systematics


Figure 1.12: Angle: NEUT Interaction

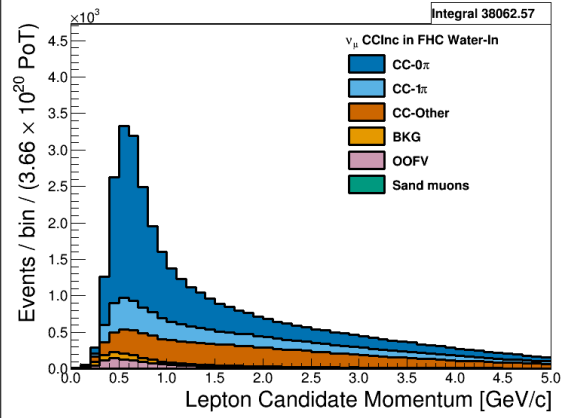


(a) Nominal MC

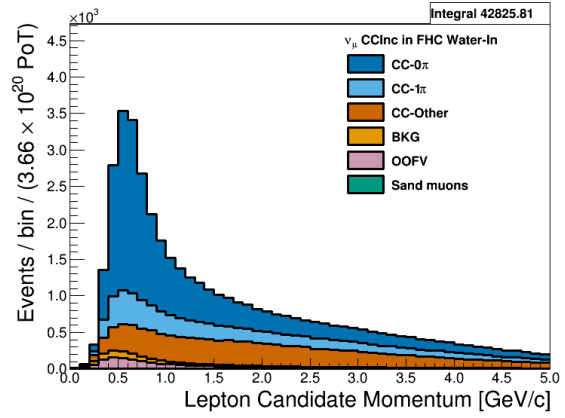

(b) Flux

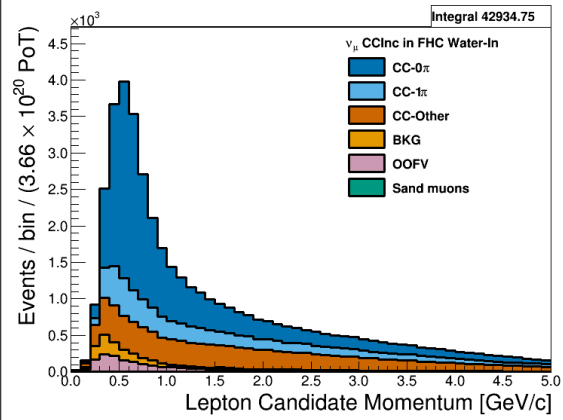


(c) Systematics

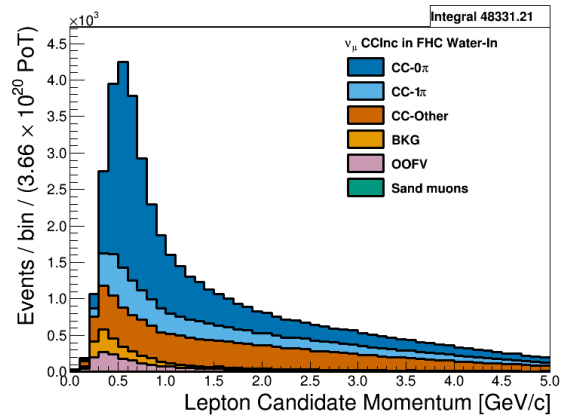


(d) Flux + systematics


Figure 1.13: Momentum: True Topology

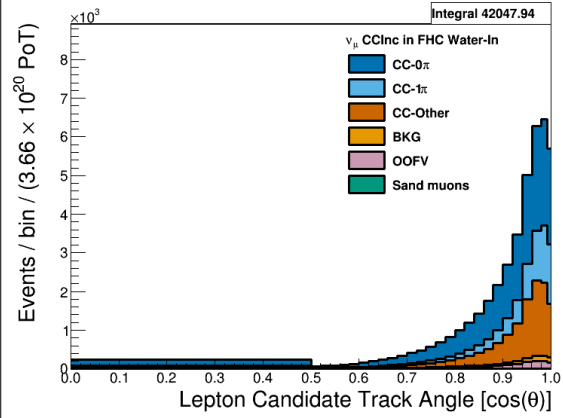


(a) Nominal MC

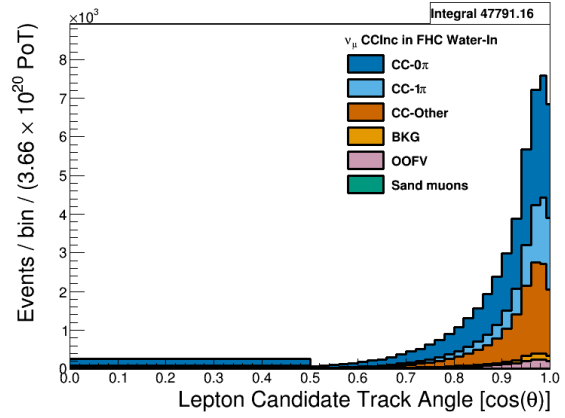

(b) Flux

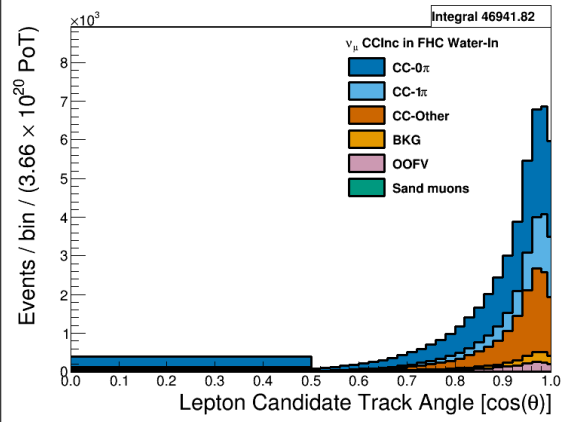

(c) Systematics

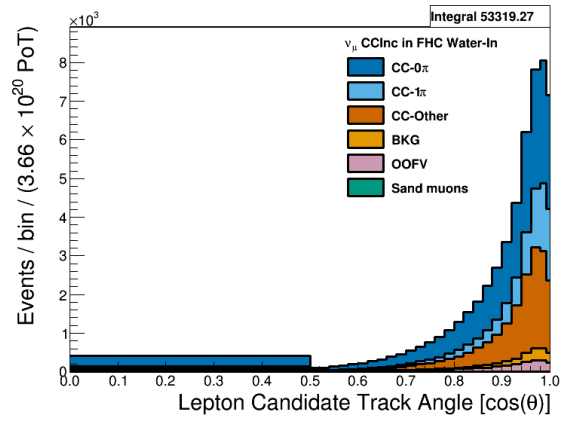

(d) Flux + systematics

Figure 1.14: Angle: True Topology

1.5.1 CC-Inclusive

1.5.2 CC-1 Track (CCQE Enhanced)

1.5.3 CC-N Tracks (CCnQE Enhanced)

1.6 PØD Water-In Selections

1.6.1 CC-Inclusive

1.6.2 CC-1 Track (CCQE Enhanced)

1.6.3 CC-N Tracks (CCnQE Enhanced)

1.7 Comparison Between Water-Out and Water-In Selections

References

- [1] T. Campbell. *Measurement of the ν_μ CC- 0π Double Differential Cross Section on Water in the PØD*, February 2018. T2K-TN-328. 5
- [2] T. Campbell and Others. *Analysis of ν_μ Charged Current Inclusive Events in the PØD in Runs 1+2+3+4*, Mar 2014. T2K-TN-80 v4. 5, 8, 9
- [3] R. Das and Others. *Measurement of Induced Charged Current Cross Section on Water using the PØD and TPC*, November 2014. T2K-TN-100. 5
- [4] K. Gilje. *Geometry and Mass of the π^0 Detector in the ND280 Basket*, Apr 2012. T2K-TN-73 v3.1. 9
- [5] A. Hillairet and Others. *ND280 Reconstruction*, Nov 2011. T2K-TN-72 v1. 9
- [6] G. Wikström and A. Finch. *Global Kalman vertexing in ND280*, Feb 2018. T2K-TN-46 v3. 7
- [7] T. Yuan and Others. *Double Differential Measurement of the Flux Averaged ν_μ CC 0π Cross Section on Water*, Aug 2016. T2K-TN-258 v4.6.1. 5, 8

Nomenclature

CC-0 π A charged current zero pion selection is an exclusive selection that selects neutrino interaction topologies only one MIP-like particle.

CC-Inclusive A charged current event selection that selects all neutrino interaction topologies with an outgoing charged lepton.

FGD A fine grain detector is a detector made of closely spaced, small scintillating bars designed to provide precise resolution of charged particle tracks

FHC The forward horn current beam configuration that focuses positively charged particles into the particle decay pipe. This configuration produces a very pure ν_μ neutrino beam

HMNT The highest momentum negatively-charged track in the bunch

HMPT The highest momentum positively-charged track in the bunch

MIP A minimum ionizing particle

ND280 The Near Detector of T2K which is 280 meters away from the neutrino source.

CECal The Central ECal detector which is a part of the PØD inside ND280

PØD The π^0 detector (pi-Ø detector)

PØDule A collection of two active scintillator bar layers inside the PØD

RHC The reverse horn current beam configuration that focuses negatively charged particles into the particle decay pipe. This configuration produces a $\bar{\nu}_\mu$ enriched neutrino beam with a significant ν_μ contribution.

FV The fiducial volume of a detector is the region where the detector response is well understood

182 TPC A **t**ime **p**rojection **c**hamber is a device that detects and tracks charged particles with
183 the application of strong electric fields

184 Tracker The region of ND280 consisting of two FGDs and TPCs

185 Global The Global reconstruction module responsible for making joined tracks between the
186 subdetectors inside ND280

187 USECal The **U**pstream **E**Cal which is a part of the PØD inside ND280