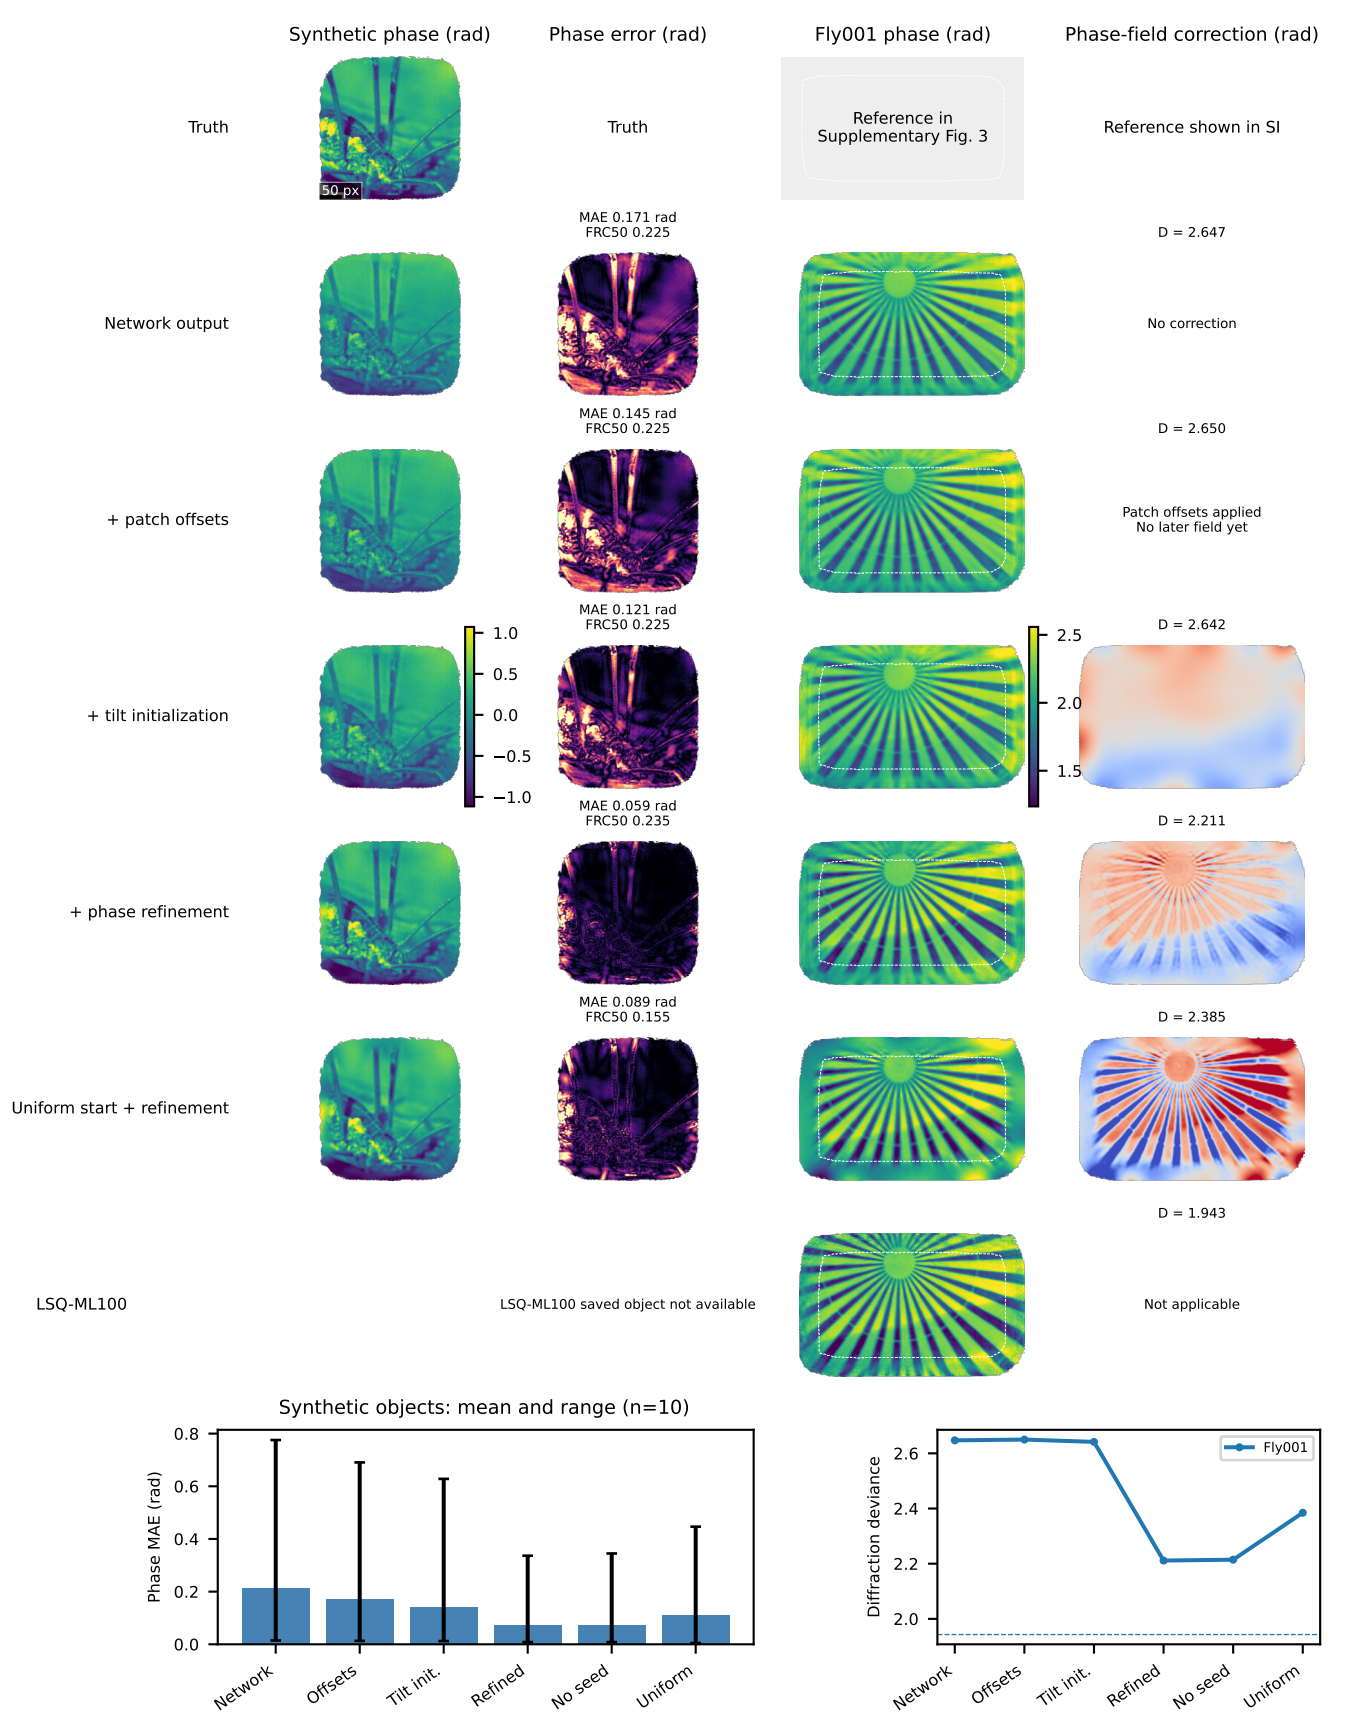


Image fields use the full support bounding box; metrics retain their saved domains.
Fly checkpoint selection uses the high half; this spatial validation is not an independent test.
No guard band.
Reference is an experimental estimate. Dashed image boundary: scored interior.
Error maps: 0–0.5 rad; fields show later correction to each start (network after patch offsets or uniform start): ±0.5 rad.
Patch offsets are applied before any later field; LSQ-ML100 has no correction field.
Dashed deviance lines: LSQ-ML100.
Fly: reference D=2.138, floor=0.554