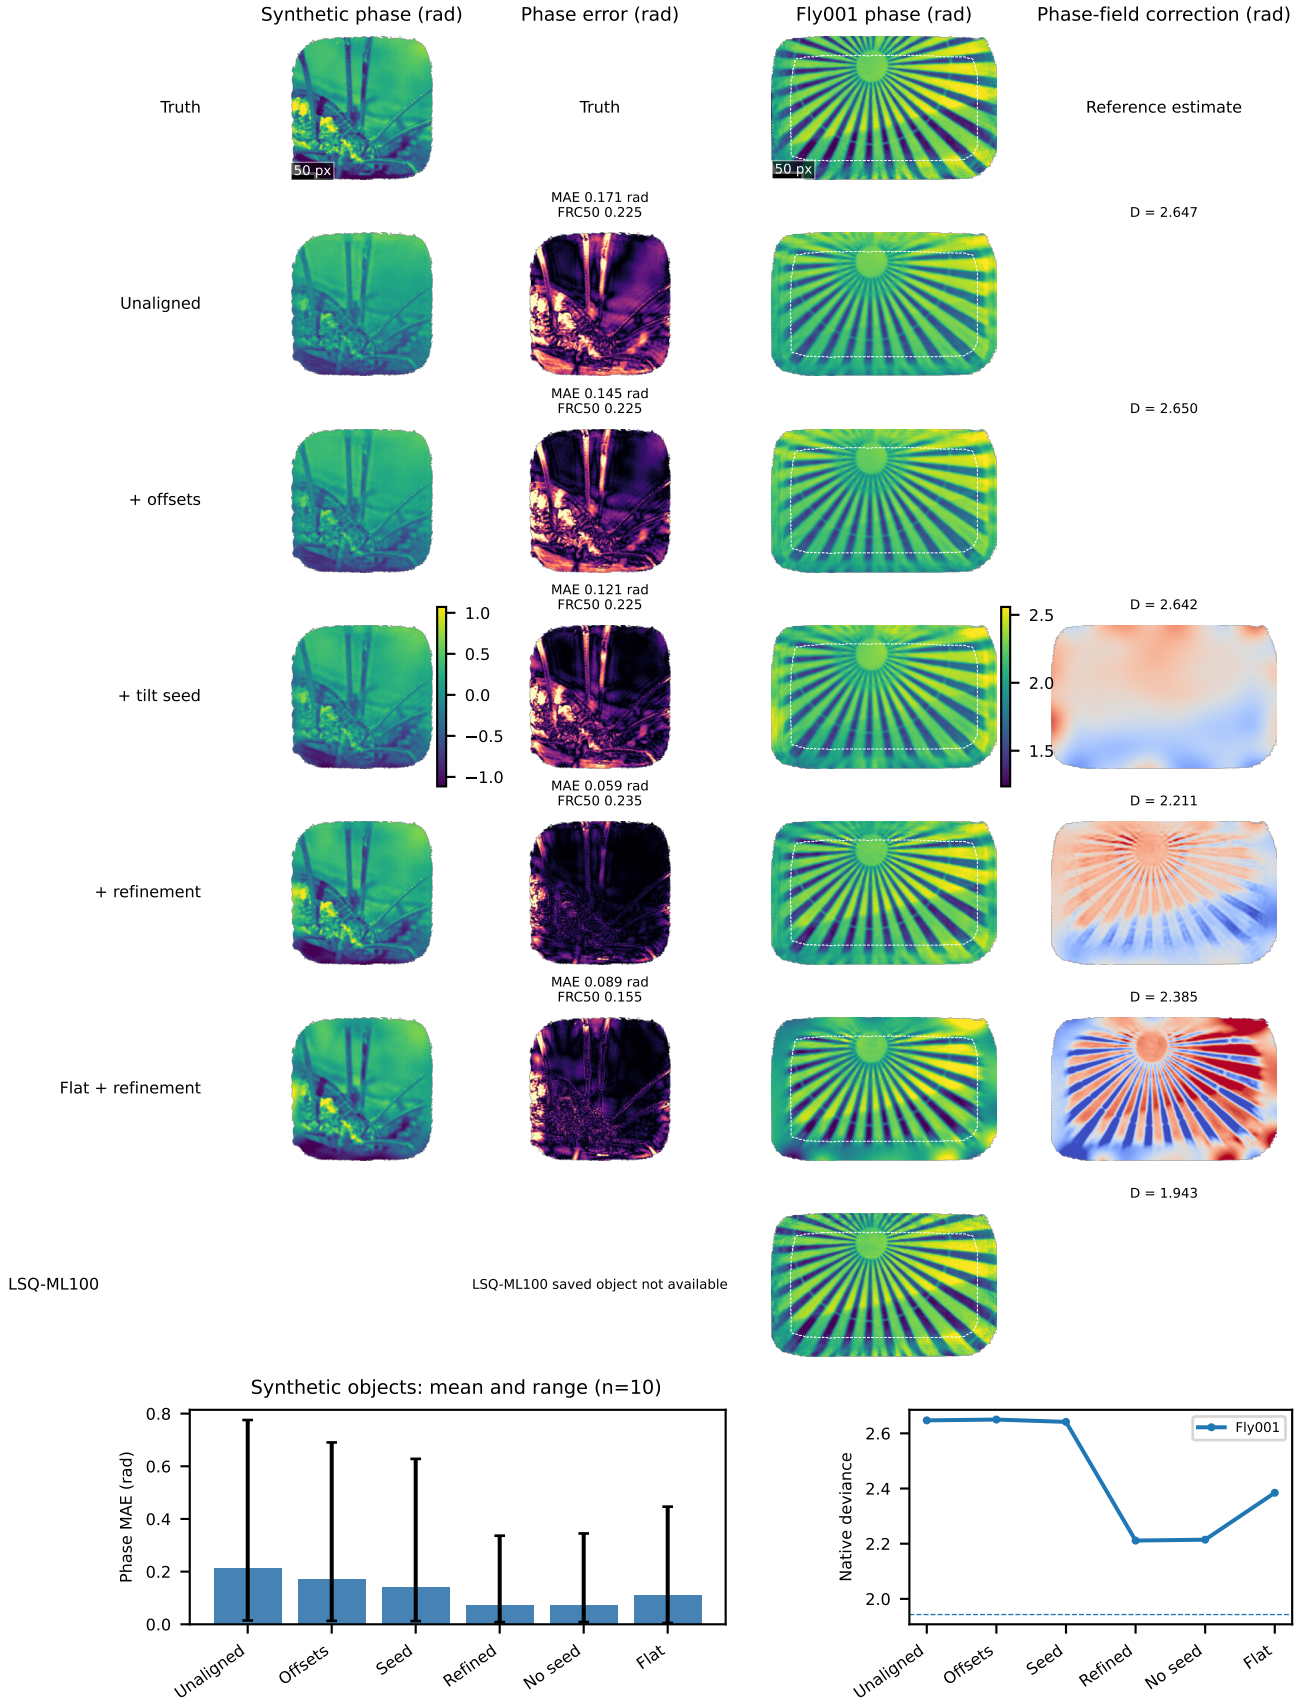


Image fields use the full support bounding box; metrics retain their saved domains.
Fly checkpoint selection uses the high half; this spatial validation is not an independent test.
No guard band.
Reference is an experimental estimate. Dashed image boundary: scored interior.
Error maps: 0–0.5 rad; correction fields: ±0.5 rad. Dashed deviance lines: LSQ-ML100.
Fly: reference D=2.138, floor=0.554