


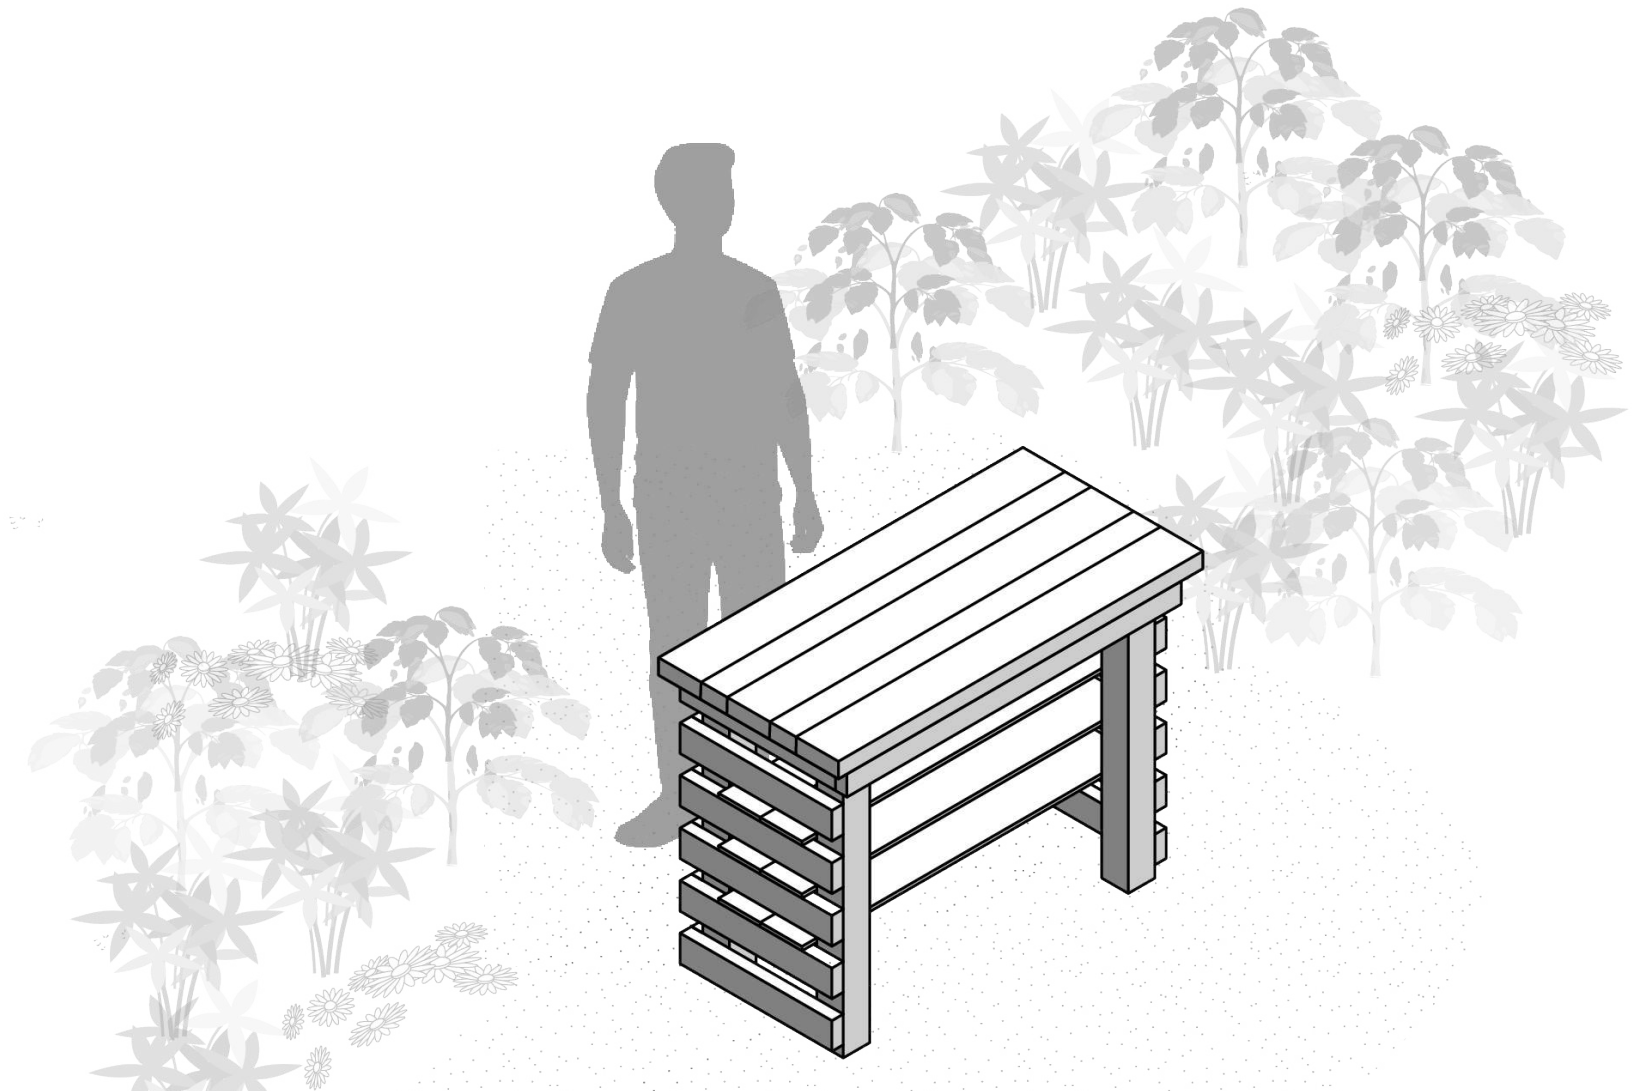

STANDING TABLE

ASSEMBLY INSTRUCTIONS

1. This document includes recommendations for do-it-yourself (DIY) construction of a [standing table](#). As a DIY project, the Owner, or the Owner's Contractor, is required to procure, fabricate, assemble, install, and maintain all project materials. These are recommendations only and any material. Any assembly and construction must be tailored to specific project requirements!
2. These recommendations are based on common best practices associated with standard DIY home-improvement and/or landscape construction. These best practices may include working knowledge and experience with manual and power tools, hardware, fasteners, lumber, concrete footings, and associated techniques of assembly and construction. Prior working knowledge of these best practices is required so as to avoid harm or personal injury to self or others, or to property.
3. This document includes recommendations for the sequence and assembly of [standing table](#)

LEGAL NOTICE:

The recommendations included herein are based on standard practices of fabrication and construction of garden furnishings. In no event shall Thomas Jefferson University (TJU), TJU's Lab For Social Innovation, Park-in-a-Truck, and/or its faculty, staff or affiliates be liable for any damages or injury to person or property damages arising out of the use of these recommendations. Thomas Jefferson University (TJU), TJU's Lab For Social Innovation, Park-in-a-Truck, or its faculty, staff and/or affiliates make no warranties, expressed or implied, and hereby disclaims and negates all other warranties, including without limitation, implied warranties or conditions of merchantability, fitness for a particular purpose, or non-infringement of intellectual property or other violation of rights. Further, Thomas Jefferson University (TJU), TJU's Lab For Social Innovation, Park-in-a-Truck, and/or its faculty, staff or affiliates do not warrant or make any representations concerning the accuracy, likely results, or reliability of the use of these recommendations. The use of these recommendations constitutes your acknowledgment of the aforementioned.

LUMBER+HARDWARE \\\

(2)	4" x 4" x 8' L	Cedar, Pressure-treated, or Pine S4S #1 Grade
(3)	2" x 4" x 8' L	Cedar, Pressure-treated, or Pine S4S #1 Grade
(2)	2" x 4" x 10' L	Cedar, Pressure-treated, or Pine S4S #1 Grade
(1)	2" x 4" x 12' L	Cedar, Pressure-treated, or Pine S4S #1 Grade
(1)	2" x 6" x 12' L	Cedar, Pressure-treated, or Pine S4S #1 Grade
(3)	1" x 6" x 8' L	Cedar, Pressure-treated, or Pine S4S #1 Grade
(144)	3" Wood Screws	3" Self driving exterior wood screws

 3" Self Driving Exterior Wood Screws

TOOLS \\\

POWER SAW (table or hand)

IMPACT DRIVER for self drilling exterior wood screws

CARPENTERS SQUARE

SAFETY GOOGLES + MASK



STEP

1. MARK, LABEL AND CUT LUMBER INTO THE FOLLOWING LENGTHS:

TABLE BASE

- A-1 SIDE BRACE
(2) 2" x 4" x 10' L CUT TO:
(12) 20"
- A-2 BACK BRACE
(3) 2" x 4" x 8' L CUT TO:
(6) 41"
- A-3 FRONT BRACE
(1) 2" x 4" x 12' L CUT TO:
(1) 44"
- A-4 TABLE SHELVES
(3) 1" x 6" x 8' CUT TO
(6) 48"
- A-5 TABLE LEGS
(2) 4" x 4" x 8' L CUT TO:
(4) 34"


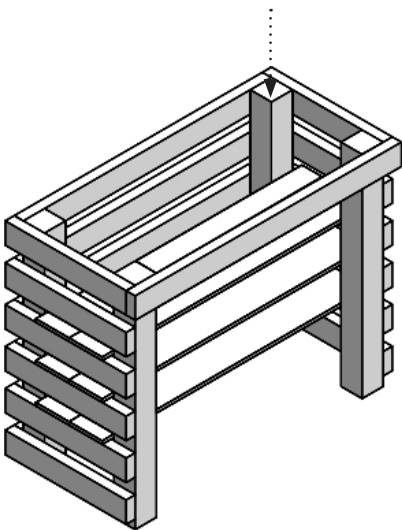


TABLE TOP

- B-1 TABLE TOP WIDE
(1) 2" x 6" x 12' L CUT TO:
(3) 48"
- B-2 TABLE TOP NARROW
(1) 2" x 4" x 12' L CUT TO:
(2) 48"

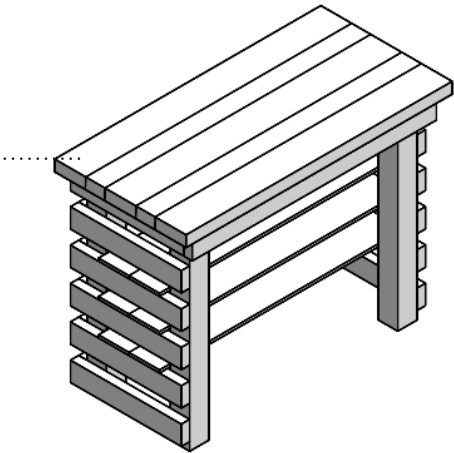

B-2

TIP: IT IS HELPFUL TO WRITE THE LETTERS ONTO EACH PIECES OF LUMBER AS YOU'RE MARKING IT SO YOU CAN ENSURE YOU HAVE ALL PIECES. IT IS ALSO HELPFUL TO HAVE A PILE OF LUMBAR FOR EACH LETTER



STEP

1. PLACE **ONE, 2" X 4" X 20"**
ON FLAT SURFACE

2. PERPENDICULAR FROM THE
LONG EDGE, MEASURE 41" AND
PLACE **ONE 2" X 4" X 20"**


3. PLACE **ONE 2" X 4" X 41"** IN
BETWEEN THE BACK EDGE OF
BOTH **2" X 4" X 20"** PIECES

***UTILIZE A CARPENTERS
SQUARE TO ENSURE A RIGHT
ANGLE IS FORMED BEFORE
SECURING THE 2" X 4" X 41"
AGAINST THE ENDS OF THE
2" X 4" X 20" PIECES TO HELP
ALIGNMENT**

4. SECURE LUMBER BY
USING AN IMPACT DRIVER
WITH **FOUR, 3"** SELF DRIVING
EXTERIOR WOOD SCREWS

5. PLACE **ONE 2" X 4" X 44"** IN
THE FRONT OF THE TWO 2" X 4"
X 20" PIECES

6. SECURE LUMBER BY
USING AN IMPACT DRIVER
WITH **FOUR, 3"** SELF DRIVING
EXTERIOR WOOD SCREWS

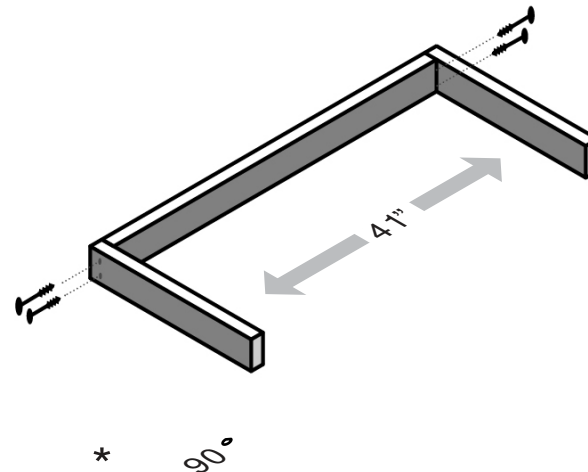




STEP

1. PLACE **ONE, 4" X 4" X 34"** IN EACH OF THE FOUR CORNERS OF THE STANDING TABLE FRAME

***UTILIZE A CARPENTERS SQUARE TO ENSURE A RIGHT ANGLE IS FORMED BEFORE SECURING THE 4" X 4" X 34" AGAINST THE TABLE FRAME COMPLETED IN STEP 2**

2. SECURE LUMBER INTO THE **FOUR 4" X 4" X 34"** STANDING TABLE LEGS BY USING AN IMPACT DRIVER WITH **SIXTEEN, 3" SELF DRIVING EXTERIOR WOOD SCREWS** ON THE FRONT, BACK, LEFT, AND RIGHT SIDES OF THE STANDING TABLE

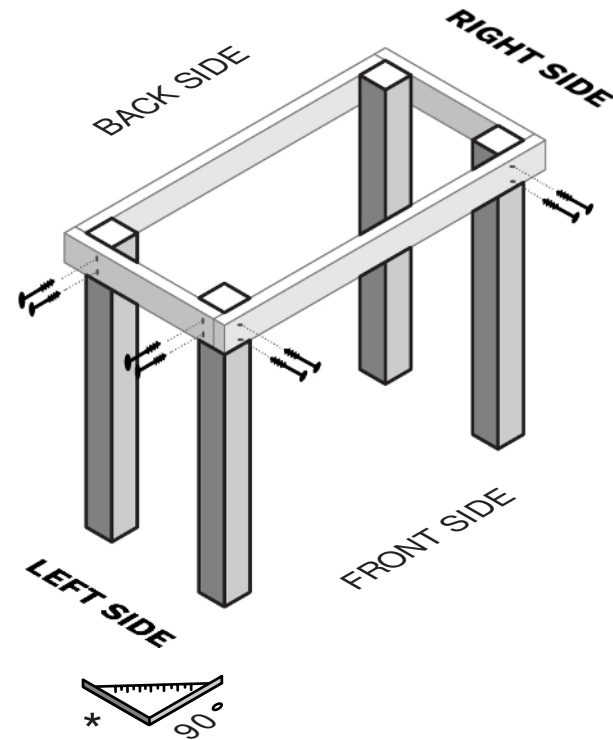

STEP

1. PLACE **ONE, 2" X 4" X 20"**
ON FLAT SURFACE

2. PERPENDICULAR FROM THE
LONG EDGE, MEASURE 41" AND
PLACE **ONE 2" X 4" X 20"**

3. PLACE **ONE 2" X 4" X 41"** IN
BETWEEN THE BACK EDGE OF
BOTH **2" X 4" X 20"** PIECES

***UTILIZE A CARPENTERS
SQUARE TO ENSURE A RIGHT
ANGLE IS FORMED BEFORE
SECURING THE 2" X 4" X 41"
LUMBER**



4. SECURE LUMBER BY
USING AN IMPACT DRIVER
WITH **FOUR, 3"** SELF DRIVING
EXTERIOR WOOD SCREWS

5. REPEAT STEPS 1-4 TO CREATE
AN ADDITIONAL FOUR FRAME
PIECES

6. PLACE ONE OF THE SECURED
FRAME PIECES ON THE BOTTOM
OF THE STANDING TABLE FRAME
AS SHOWN IN THE BOTTOM
IMAGE

***USE AN ADDITIONAL 2" PIECE
OF SCRAP LUMBER AS A SPACER
FOR PLACING THE TABLE
BRACES**

7. SECURE LUMBER BY
USING AN IMPACT DRIVER WITH
TWELVE, 3" SELF DRIVING
EXTERIOR WOOD SCREWS, **2"**
ABOVE THE GROUND

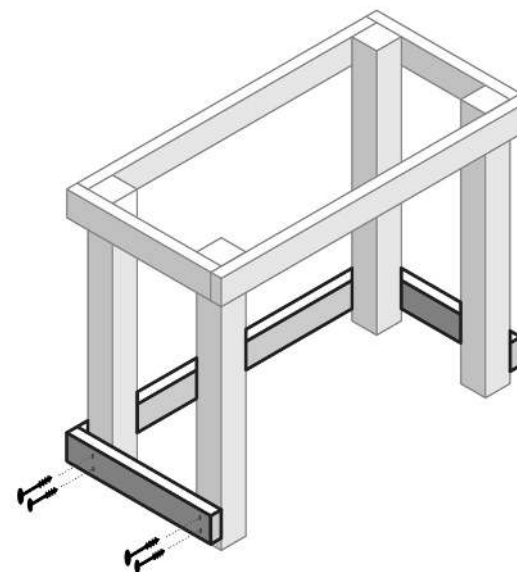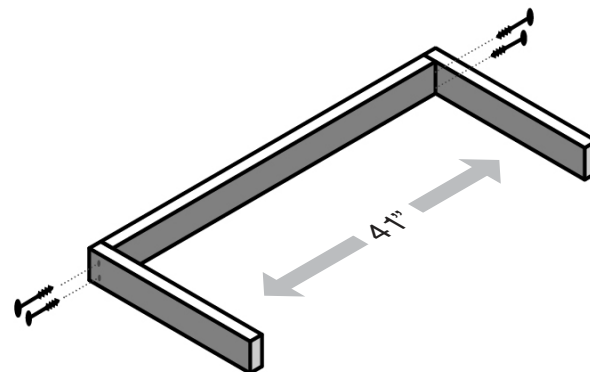


5 STEP

1. PLACE **ONE** TABLE FRAME PIECES 2" ABOVE THE ONE PLACED IN THE PREVIOUS STEP

2. SECURE LUMBER BY USING AN IMPACT DRIVER WITH **TWELVE**, 3" SELF DRIVING EXTERIOR WOOD SCREWS

3. PLACE **TWO 1" X 6" X 48"** PIECES NEXT TO ONE ANOTHER ON TOP OF THE SECURED LUMBER FROM STEP TWO

4. SECURE THE **1" X 6" X 48"** LUMBER BY USING AN IMPACT DRIVER WITH **EIGHT**, 3" SELF DRIVING EXTERIOR WOOD SCREWS

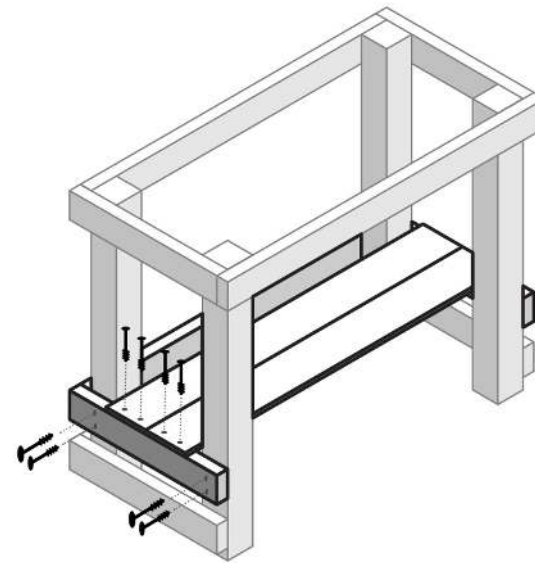

6 STEP

1. PLACE **ONE** TABLE FRAME PIECES 2" ABOVE THE ONE PLACED IN THE PREVIOUS STEP

2. SECURE LUMBER BY USING AN IMPACT DRIVER WITH **TWELVE**, 3" SELF DRIVING EXTERIOR WOOD SCREWS


3. PLACE **TWO 1" X 6" X 48"** PIECES NEXT TO ONE ANOTHER ON TOP OF THE SECURED LUMBER FROM STEP TWO

4. SECURE THE TWO **1" X 6" X 48"** LUMBER BY USING AN IMPACT DRIVER WITH **EIGHT**, 3" SELF DRIVING EXTERIOR WOOD SCREWS

5. REPEAT STEPS 1-4 FOR THE REMAINING SHELF ABOVE

6. PLACE THE LAST TABLE FRAME PIECES 2" ABOVE THE LAST SHELF

7. SECURE LUMBER BY USING AN IMPACT DRIVER WITH **TWELVE**, 3" SELF DRIVING EXTERIOR WOOD SCREWS

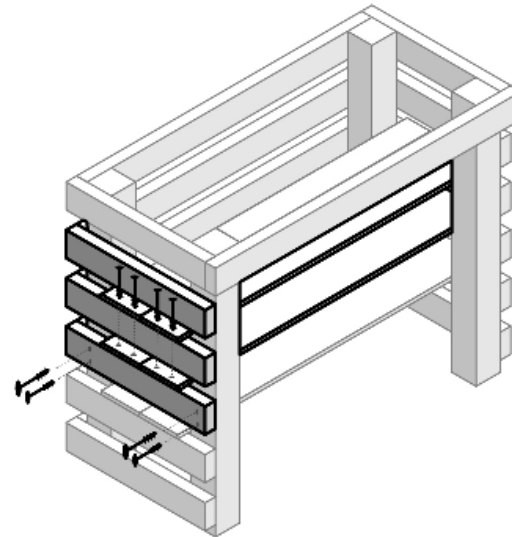

7 STEP

1. PLACE **ONE 2" X 6" X 48"** IN THE MIDDLE OF THE STANDING TABLE, THERE WILL BE A **2"** OVERHANG ON THE LEFT AND RIGHT SIDES OF THE STANDING TABLE


2. SECURE LUMBER BY USING AN IMPACT DRIVER WITH **FOUR, 3"** SELF DRIVING EXTERIOR WOOD SCREWS

3. PLACE **ONE 2" X 4" X 48"** ON EITHER SIDE OF THE **2" X 6" X 48"** MIDDLE BOARD

4. SECURE LUMBER BY USING AN IMPACT DRIVER WITH **FOUR, 3"** SELF DRIVING EXTERIOR WOOD SCREWS

5. PLACE **ONE 2" X 6" X 48"** ON EITHER SIDE OF THE **2" X 4" X 48"** PIECES FROM THE STEP ABOVE

6. SECURE LUMBER BY USING AN IMPACT DRIVER WITH **FOUR, 3"** SELF DRIVING EXTERIOR WOOD SCREWS

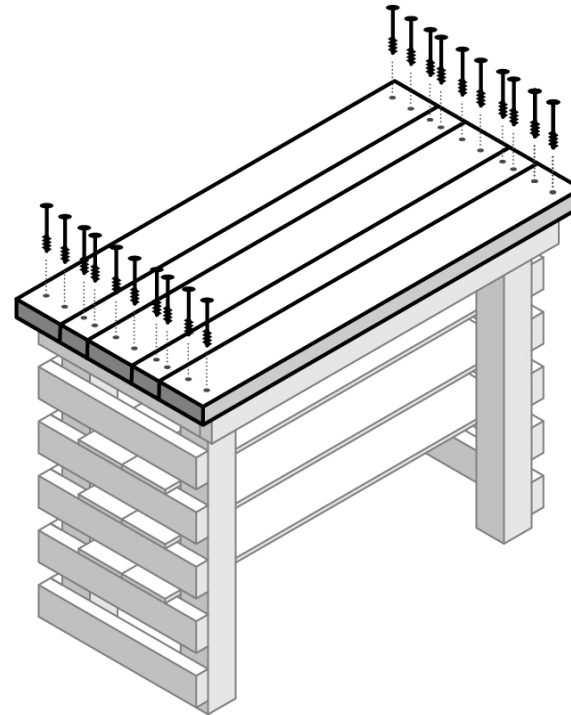

8 STEP

FINISHES + COATINGS:

ALL EDGES AND SURFACES SHOULD BE LIGHTLY SANDED TO REMOVE SPLINTERS OR ROUGH EDGES.

CEDAR:

NO COATINGS REQUIRED; WILL WEATHER TO LIGHT GRAY. IF DESIRED, A COLORLESS STAIN CAN BE USED TO MAINTAIN AS-INSTALLED COLOR. PRODUCT SHOULD BE A WOOD PENETRATING, WATER-BASED ALKYD. MAY ALSO BE PAINTED WITH PRIMER/PAINT/SEALANT.

PRESSURE-TREATED:

NO COATINGS REQUIRED. IF COLOR IS DESIRED, LET AIR DRY FOR SEVERAL MONTHS UNTIL WATER NO LONGER BEADS ON SURFACE. SAND SURFACE WHILE WEARING MASK TO AVOID INHALATION OF TREATED WOOD DUST. USE EXTERIOR PRIMER+PAINT, AND SEAL WITH WATER-BASED SPAR URETHANE.

KILN-DRIED FIR OR PINE:

STAIN WITH SEALER OR PRIMER/PAINT/SEALER REQUIRED TO AVOID ADVANCED WEATHERING. MAY ALSO BE PAINTED PER ABOVE.

