


A	Motor Flywheel Thickness
B	Effective Shaft Length
C	Tachometer Flywheel Thickness
D	Shaft Diameter
E	Tachometer Flywheel Diameter
F	Motor Flywheel Diameter

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED

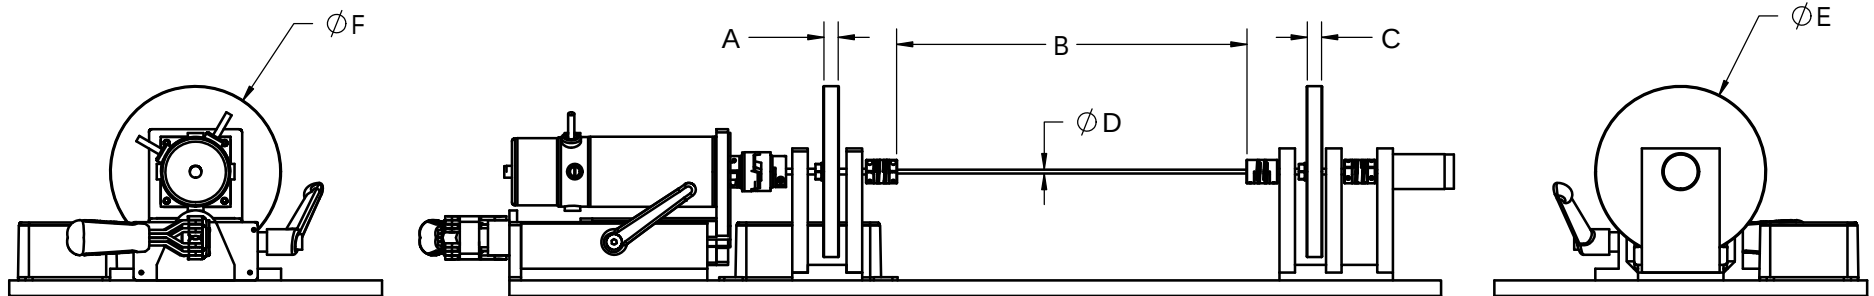

Run #	A	B*	C	D	E	F
1	12.72	291	12.68	3.16	137.21	137.19
2	12.69	291	12.71	3.15	137.20	137.18
3	12.70	290	12.70	3.19	137.22	137.18
4	12.68	291	12.69	3.15	137.19	137.20
5	12.73	292	12.71	3.17	137.18	137.19

NOTES:

- All dimensions in millimeters.
- Mitutoyo calipers used for all measurements except B, which used a scale (ruler).

 COLLEGE OF ENGINEERING MECHANICAL ENGINEERING UNIVERSITY OF MICHIGAN		REFERENCE		NONE	
		DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED: MILLIMETERS INCHES 1 PLACE ±0.3mm 2 PLACES ±0.01 2 PLACES ±0.03mm 3 PLACES ±0.001 3 PLACES ±0.015mm 4 PLACES ±0.0001			
BREAK ALL SHARP EDGES UNLESS OTHERWISE SPECIFIED.		CAD FILE FlexShaft_FullAssy_Dimensions			
CAD TYPE SOLIDWORKS	CAD LOC. -	TITLE UM ME X/95 LABS ME495: FLEXIBLE SHAFT LAB COMPONENT DIMENSIONS			SHT 1 OF 1
DESIGN JLAIDLAW	DETAIL JLAIDLAW	PROJECT -			
SCALE 1:4	DATE 1/22/2021	PROJECT -			