

Lab Manual

The Physics of Climate Change

Ben Holder and Tim Evans
GVSU Physics
Fall 2025

Contents

1	Measurement, Uncertainty, and Temperature	5
1.1	Introduction and Definitions	5
1.2	Experiments	7
1.2.1	The time of my name	7
1.2.2	“Seeing” the uncertainty I: Room Temperature	7
1.2.3	“Seeing” the uncertainty II: Body Temperature	8
1.2.4	Leslie Cube	9
1.2.5	Temperatures of other objects	10
2	Global Average Temperature	13
2.1	Introduction and Definitions	13
2.2	Experiments and Activities	14
2.2.1	Temperature Anomalies	14
2.2.2	The approach to an average	15
2.2.3	Global average temperature (of your table)	15
2.2.4	Global average temperature (of the Earth land surface)	16
3	Energy and Equilibrium	17
3.1	Introduction and Definitions	17
3.1.1	Motion	17
3.1.2	Dynamics: Newton’s Law(s)	18
3.1.3	Energy: Mechanical Energy	19
3.1.4	Energy: Other Energy	19
3.1.5	Energy: Equilibrium	19
3.2	Experiments and Activities	20
3.2.1	Motion	20
3.2.2	Mechanical Work	20
3.2.3	Work and thermal energy	20
3.2.4	Equilibrium: Leaky Buckets	21
4	Electromagnetic Radiation and Blackbody Radiation	25
4.1	Introduction and Definitions	25
4.1.1	Electromagnetic Spectrum	26
4.1.2	Blackbody Radiation	27

4.2	Experiments and Activities	28
4.2.1	Observations of light	28
4.2.2	Observations of transmission of light	29
5	Heating by Radiation	31
5.1	Introduction and Definitions	31
5.1.1	First Law of Thermodynamics, Heating, and Calorimetry	32
5.2	Experiments and Activities	34
5.2.1	Specific heat of aluminum	34
5.2.2	Heating aluminum block by radiation	35
6	Greenhouse Effect: Light Absorption and Transmission	37
6.1	Introduction and Definitions	37
6.1.1	The “how” of greenhouse gas absorption: exponential losses	38
6.2	Experiments and Activities	41
6.2.1	Cooling by radiation, with blankets	41
6.2.2	Transmission of light through water (with colors)	43
7	Evaporation of water by boiling	45
7.1	Introduction and Definitions	45
7.1.1	Phase transitions and water	46
7.2	Experiments and Analysis	49
7.2.1	Boiling water!	49
8	Evaporation and Clouds	53
8.1	Introduction and Definitions	53
8.1.1	Atmospheric pressure and a warm-up experiment	53
8.1.2	Relative humidity, absolute humidity, partial pressure of water	54
8.2	Experiments and Analysis	58
8.2.1	Observing the dew point and frost point	58
8.2.2	Drying your hands	60
8.2.3	An alcohol upside-down cloud	61
8.2.4	Clouds	62

Lab 1

Measurement, Uncertainty, and Temperature

Say my name. Say my name.

Equipment List

- Leslie Cube
- Glass Thermometer
- IR Thermometer “gun” (2)
- Stopwatch
- Ruler
- Computer

Overview

In this weekly lab you will primarily work in pairs, with your “partner” at the same table, but feel free to discuss things with the “group” of four at your adjoining tables. We will also share data with the entire class, usually using google surveys and sheets. You will turn in your own individual lab assignment, with copies of all data and graphs, in a single pdf document uploaded to the Blackboard “assignment” for that week.

1.1 Introduction and Definitions

Today we will conduct our first measurements of physical phenomena, mostly temperature measurements, and understand the necessity of the uncertainty and units associated with those measurements.

A **physical measurement** contains three equally important parts: the numerical **value**, the **uncertainty** (also referred to as *error*) in that value, and the **units** in which these are measured.

Some examples are:

- The human body temperature is 37.0 ± 0.5 °C.
(Uncertainty represented as “plus or minus” makes a range of values. Both the value and uncertainty are in “degrees celsius”.)
- A college basketball game has 40 minutes ± 0.1 seconds of playing time.
(The final minute clock measures to tenths of a second. The units can be different between the value and uncertainty.)
- The Sun is 93 million miles away
Here the uncertainty is expressed *implicitly* as “plus or minus a few of the last digit given”, so plus or minus a few million miles

Let's make a precise definition of the uncertainty/error in a measurement:

Given a particular measurement, the **uncertainty** is a statement of the range of values in which another scientist is likely¹ to make the same measurement.

There are a number of sources/components of this uncertainty:

- **Instrumental Uncertainty:** A measurement device generally has a smallest unit division shown. For an analog device — like a ruler with millimeter marks, or a thermometer with degrees — where we might hope to measure between the smallest markings, we can specify the instrumental uncertainty as such (e.g., half of a millimeter on a ruler, or 0.3°C on a thermometer). For a digital device, we can say that the instrumental uncertainty is “plus or minus a few of the last digit” (e.g., ± 0.03 seconds on a standard stopwatch).
- **(Manufacturing) Instrumental Uncertainty:** Sometimes although an instrument shows a precise demarcation, it is clear from looking at multiple “identical” instruments that they were not manufactured to that precision (e.g., multiple identical thermometers read slightly different values). The range of manufacturing uncertainty can be assessed by using multiple copies of the same device.
- **Methodological Uncertainty:** Sometimes our uncertainty is limited more by the way we make a measurement than by the instrument itself. For example, although a stopwatch has instrumental uncertainty in the hundredths of a second, our human reaction time is no better than a few *tenths* of a second, so our methodological uncertainty would be ± 0.3 s. This can be assessed by making repeated measurements.
- **Natural Variation** Almost always, the object of measurement does not have an infinitely precise value (e.g., the “temperature outside right now” depends on where exactly you measure it, and at which moment in time; the “diameter of a rock” that is not spherical). This uncertainty can sometimes be limited by a more precise specification of the measurement (e.g., “the temperature in the shade, outside Padnos, at 10:40 am”; or “the largest diameter of the rock”). And, like the methodological uncertainty, it can be assessed by repeated measurements.

¹More precisely, if we say that the uncertainty is the *standard deviation* over repeated measurements, then 68% of all measurements fall in that range

1.2 Experiments

1.2.1 The time of my name

- Have your partner recite their full name to you at a steady relaxed pace. Measure the amount of time this takes using the stopwatch. You can try this multiple times. Then switch and recite your own name for them.

Questions

1. Write down the name, and then your time measurement with uncertainty and units.
2. Briefly explain how you arrived at the uncertainty value, making mention of all “sources” of uncertainty.

1.2.2 “Seeing” the uncertainty I: Room Temperature

One table has been set up with an array of thermometers. Since they are all localized in the same place, they should be making approximately the same measurement: the temperature of the air at that table right now.

- Take a careful clear photo of the array of thermometers, then return to your desk and write down each of the temperature measurements on a sheet of paper.
- Considering the range of measurements you have, put labeled tick marks on the axis below such that the values will be spread out across the line. Use a ruler to make equal spacing of tick marks. At the far right, label that axis (e.g., “Temperature (C)”).
- Place a dot on/near the axis for every measurement of temperature. You can “scatter” these a bit above/below the axis for clarity.



Questions

1. Express the full measurement with value, uncertainty, units. Estimate the uncertainty using your graphical display of points.
2. What is the instrumental uncertainty for this thermometer?
3. What do you think is the primary source of the uncertainty? Mention each type of uncertainty source.

1.2.3 “Seeing” the uncertainty II: Body Temperature

Here each of you will make a measurement of your body temperature using the Infrared (IR) thermometer “gun” on the palm of your hand. Note the picture on the side of the IR thermometer gun describing its “beam” of measurement (imagine a spot being projected onto the thing you are measuring, and make sure the spot is contained within the object). You will produce a two-picture plot, using a provided code (see Blackboard) and the Google CoLab implementation of python programming language.

1. What is the instrumental uncertainty associated to the IR thermometer?

2. Do you observe any natural variation of temperature across your hand?
 3. Write down your measurement (with value, uncertainty, and units) here, and then submit it to the google survey (see Blackboard).
- Copy the column of “values” data for the whole class in the linked spreadsheet (see Blackboard) into your own spreadsheet and save as a csv file.
 - In a web browser, go to `colab.research.google.com` and open a “New Notebook”.
 - Paste in the code provided on blackboard for *Scatter and Histogram Plot*.
 - To run the code, either press the “play” button, or press shift-enter/shift-return. It will prompt you for your csv file to upload.
 - This will produce a plot on the screen.
 - Notice that there are generic axis labels and titles. Find the place in the code where they have been entered and edit them to make them specific to your particular data.
 - To save and print your plot, you can either right-click and save to a file or screenshot to a file. Print this plot so that you can add it to your submission.

1.2.4 Leslie Cube

- Fill up the Leslie cube with hot/warm water at the sink and then replace the rubber stopper. Fill a small beaker with cold water.
 - Place the glass thermometer first in the cold water, and then insert it into the Leslie cube such that its bulb is in the middle of the cube.
1. Record the glass thermometer measurements of the temperature in the cold water and in the Leslie cube.
 2. Describe how quickly the thermometer came to equilibrium with the cold water and with the hot water.
 3. Take and record temperature measurements of each side of the Leslie cube using the IR thermometer gun.

1.2.5 Temperatures of other objects

- Using the IR thermometer gun, record measurements of temperature (with value, uncertainty, units for each) for some of the following objects:
 - The surface of the table you sitting at.
 - Something else in the room.
 - Outside: Something that might be in equilibrium with the air temperature (shaded spot).
 - Outside: Something that is probably not in equilibrium with the air temperature.
 - Outside: The sky (try both clear and clouded spots).
- Record your temperature measurements below and also report them to the google survey posted on Blackboard.

1. Record your temperature measurements here.

Summary Questions

Brief answers are fine, but please write in complete sentences.

1. State the temperature measurements you made for the Leslie cube, including each type of side and the direct glass thermometer measurement. Speculate on why you found different values, if you did.


2. Looking at either the hand-temperature data or the other plot you made with the entire class data: how did your own estimated uncertainty (for your measured value) compare to the “spread” of the data taken by all students? Should these agree? Why or why not?

3. Two students make a measurement of the distance from the Bookstore to the Clock Tower. They are reported as follows

$$199.65 \text{ m} \pm 0.3 \text{ m}$$

$$202 \text{ m} \pm 3 \text{ m}$$

- (i) On the axis below, draw tick marks over a wide enough range to plot both measurements *and their ranges of uncertainty*. (ii) Plot the two measurements using a point for the “value” and a horizontal bar to show the uncertainty. (iii) Are these “the same” measurements to within uncertainty or not? Explain.
4. Shown below is a summary of the Global Average Temperature over most of human recorded history. The uncertainties for each data point are indicated by bars. Speculate on how these uncertainties might have been determined, how they change over time, and why.

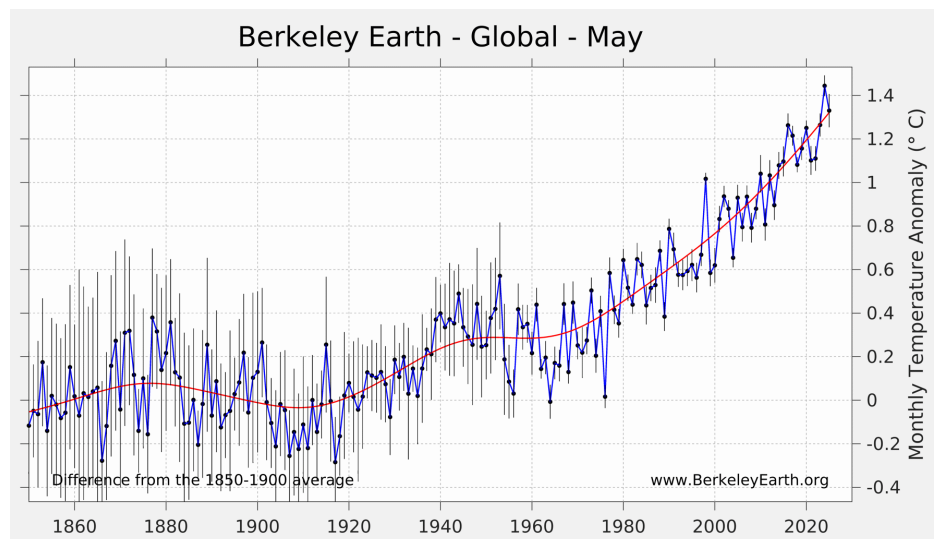

Lab 2

Global Average Temperature

The anomaly is never abnormal. It's not even anomalous.

Equipment List

- Ruler
- Meter Stick
- IR Thermometer “gun”
- Masking Tape
- incandescent lamp
- Computer

Note: When you arrive at your table, clear a space on your table that is approximately half the area and mark it off with masking tape. Then turn on the lamp so that it is pointing down at one portion of that empty space. You are “pre-heating” the table for measurements we will make below.

2.1 Introduction and Definitions

Today we consider the *Global Average Temperature*, which we have seen is the primary measure used to specify the degree of global climate change over time. Specifically, we will perform some experiments and analyses to mimic the process by which this quantity is calculated. Obviously, there are many details that are used by professional climatologists that we will ignore, but we will focus on the two most important ideas: *area-weighted average* and *temperature anomalies*.

The **global average temperature** at a given moment in time, is defined to be (and calculated as) the weighted average of the temperature at every point on Earth, with weight for a given point being the area fraction assigned to that point. For example, if we restricted ourselves to just the United States, we could *estimate* the “US average temperature” as:

$$T_{\text{US,avg}} = T_{\text{MI}} \frac{A_{\text{MI}}}{A_{\text{USA}}} + T_{\text{IN}} \frac{A_{\text{IN}}}{A_{\text{USA}}} + T_{\text{IL}} \frac{A_{\text{IL}}}{A_{\text{USA}}} + \dots$$

where you can see that the temperature value assigned to a state is weighted by the fraction of area (measured, e.g., in square kilometers) that state has in the total area of the US. This can

be written equivalently as

$$T_{\text{US,avg}} = \frac{T_{\text{MI}} A_{\text{MI}} + T_{\text{IN}} A_{\text{IN}} + T_{\text{IL}} A_{\text{IL}} + \dots}{A_{\text{USA}}}$$


This is a *weighted average* because the sum of all the factors in the numerator, $A_{\text{MI}} + A_{\text{IN}} + A_{\text{IL}} + \dots$, adds up exactly to the value in the denominator (or, in the first question, the sum of all the weights, e.g., $\frac{A_{\text{MI}}}{A_{\text{USA}}}$, add up to one). The calculation above would only be an estimate of the average temperature, because we have used only 50 points (one for each state) instead of “all” points in the US. To improve our estimate¹, we could use multiple points per state (perhaps using a thermometer in each major city). Today we will perform a number of calculations to demonstrate this technique.

However, it is not actually the average temperature that is used to track climate change, but what is called the **global average temperature anomaly**. The average temperature anomaly is calculated as follows. (1) A *reference time range* is chosen (usually a span of a decade or more, e.g., 1950–1980), over which temperatures will be averaged to determine a (local) reference temperature value. (2) At each thermometer location, the *local reference temperature* is calculated as an average over the reference time range. (3) The temperature anomaly (over time) at a given thermometer is calculated by subtracting off the local reference temperature from all temperature values. (4) An area-weighted average of the temperature anomalies is calculated over the entire Earth.

2.2 Experiments and Activities


2.2.1 Temperature Anomalies

Recall Figure 2.1 from the Dessler textbook, showing the temperature over time for two Texas cities, and then their respective temperature anomalies:

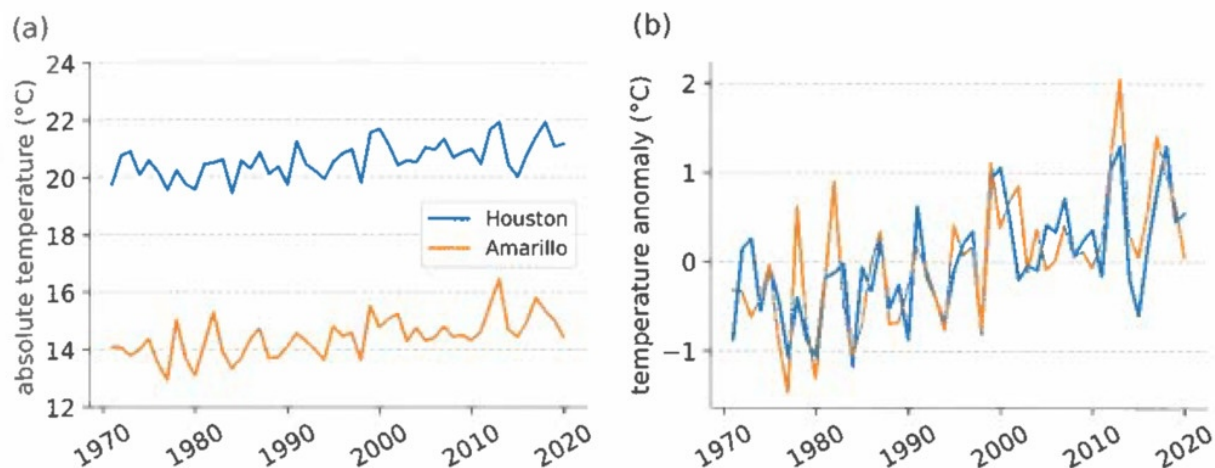

¹Technically: when the global average temperature is calculated, the discrete temperature measurements at weather stations are used to produce a continuous “function” of temperature at every point on earth by interpolation between the stations; then that continuous function is “integrated” (calculus) over the total area.

Use the similar graph below, for two Michigan cities. (i) Determine a reference time period (ii) Estimate the reference temperature for each (iii) Make an anomaly temperature scale at right, and plot the values at three years for each city.

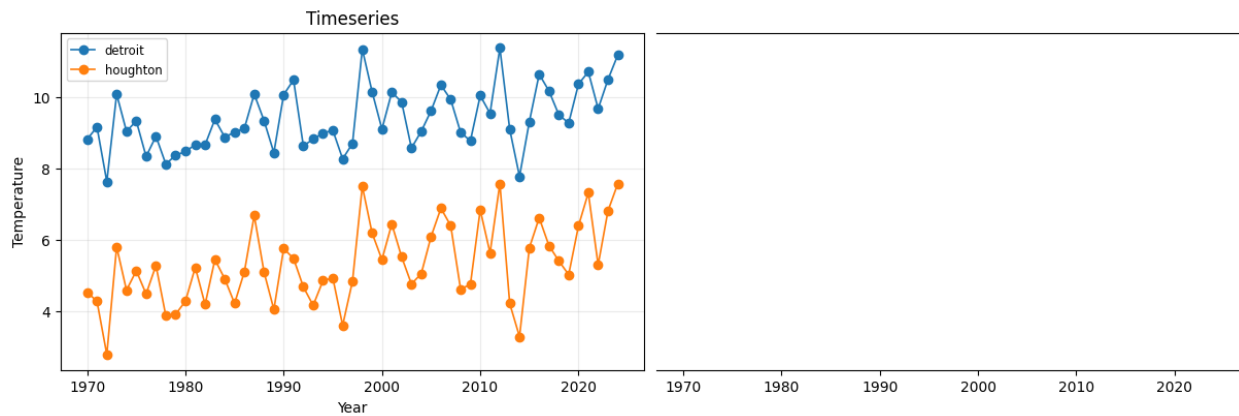

2.2.2 The approach to an average

Find the dataset of your own collected temperature measurements (submitted by you and your classmates to the google form this past week) in the “Results” link on Blackboard. For each of the two types of temperatures (air and sky) perform the following analysis:

- Copy the data from the spreadsheet of all data into your own Google sheet (or Excel spreadsheet).
- Clean the data column to make sure it contains only one numerical value per row. Save the single column of cleaned data as a csv file.
- Find the “Scatter-Histogram-Average” code on Blackboard. Copy the blocks of code into a new Google Colab notebook. (This step does not need to be done twice).
- Run the code blocks. The last block will prompt you to upload your csv file and then make a plot.

2.2.3 Global average temperature (of your table)

Perform a sequence of area-weighted averages of the temperature of your table in the previously marked off region, by completing the following steps:

1. Measure the total area that you have marked off and record this value.
2. Choose one point in the total area and measure the temperature using your IR thermometer gun. This is **Estimate 1**.
3. Using masking tape, partition your total area into 3–4 smaller areas. Measure the area of each one and record their values. Also draw a picture to show the way you have partitioned and to give names to the sub-areas (e.g., A_1 , A_2 , etc).
4. Measure and record the temperature at one point in each of the sub-areas. Create a table with columns [name, area (units), Temperature (units)].
5. Using the method described above (average US temperature), calculate an area-weighted temperature from your data. This is **Estimate 2**.

6. Subdivide your table even further, such that you have about twice as many sub-areas. Repeat steps 3–5 to calculate **Estimate 3**.

2.2.4 Global average temperature (of the Earth land surface)

We will now attempt to find the global average temperature anomaly for the Earth. Find the “Get annual temperature data for one location” code on Blackboard, and import the code blocks into a new Google Colab notebook. We will make three estimates:

- **Estimate 1:** Using only one location on Earth (your choice).
- **Estimate 2:** Using one location on each continent (again, your choice per continent).
- **Estimate 3:** Using about twice as many locations, spread out across the Earth.

In each trial you will take the following steps:

1. Use the “Get annual temperature data” code to download an annual average temperature dataset for one or more location over the 1970–2024 time range.
2. Choose a time range over which to determine the local reference average (e.g., 1970–1990).
3. Open this csv file (in Google sheets or Excel), and highlight the cells in that reference time range to find the reference average value.
4. Use the spreadsheet tools to make a new temperature anomaly column, in which the reference average is subtracted off from the temperature.
5. In Estimates 2 and 3, where you have multiple locations, create a new spreadsheet with a single date column at left and then a temperature anomaly column for each location.

To make the global average calculation, we will need to edit this file in a few additional steps:

- Look up online the surface area of each continent in square kilometers and record them. To make these values more understandable, let’s convert each into units of “Michigan mitten”. The lower peninsula of Michigan has an area of almost exactly 100,000 square kilometers. So you can divide each continental area by that value to obtain the area in “mittens”.
- In your multiple location spreadsheet, add two blank rows at top. For each anomaly column, put the name in the first row, and the area (in mittens) in the second row. In the first column (of dates) you can leave the first two rows blank.
- Locate the “Get weighted average of timeseries” code on blackboard and import the blocks into Colab. It will allow you to import your csv file. If you use the format prescribed above (two extra rows above the temperature vs time data) then it should produced a weighted temperature anomaly graph.

Lab 3

Energy and Equilibrium

There's a hole in the bucket, dear Liza, dear Liza

Equipment List

- Ruler
- Stopwatch
- Graph paper
- Glass thermometer, plastic rod stirrer (or some way of shaking?), 50mL grad cyl (2?)
- Leaky Bucket Kit (pitcher, 100 mL grad cyln, 25 mL grad cyl, aquarium pump, pump power control, two tubes, two binder clips)
- Track, cars, track-pulley, mass hanger, string (in the room, to be set up by students)

3.1 Introduction and Definitions

Today we first introduce Newton's dynamical theory of *motion*, for the purpose of defining *energy*. We will then show that energy becomes a more general concept in physics — beyond just the *kinetic energy* of moving bodies and the energy transferred from one object to another by *work done by a force* — to include the thermal physics concepts of heat, internal energy, and temperature, which are of primary concern in climate science. Specifically, it is considered a physical law of the universe that “energy is conserved”: although it might change from one form to another, every “drop” of it must be accounted for... it is neither created nor destroyed. The special case of *equilibrium*, where energy into a system is exactly balanced by energy out of a system, will be demonstrated using water as an analog for energy.

Note that there are a few tasks to complete within this section, highlighted with underlines.


3.1.1 Motion

Before understanding *why* things move the way the do, we first must be able to *describe* motion. Physicists do this by defining three related quantities for an object:

$$\text{position: } x, \quad \text{velocity: } v = \frac{\Delta x}{\Delta t}, \quad \text{acceleration: } a = \frac{\Delta v}{\Delta t}$$

We will sometimes use vector notation for these quantities, e.g., $\vec{v}$ and $\vec{a}$, to show that they point in some direction (you don't just drive 65 mph, but you drive 65 mph East). But we will calculate using the above equations and assume that the motion is just along a straight line, called the x axis. In that case there are two “directions”: in the same direction as the positive x axis (positive values) and in the opposite direction (in the negative x direction, negative values).

Position is simply where the object is (e.g., on the x axis), and velocity should be mostly intuitive — *how fast is the object going* — but also contains the direction of motion. A nice way to understand the relationship between velocity and acceleration is to consider the cases of “speeding up” and “slowing down.” Consider the picture below and draw the pair acceleration and velocity vectors (arrows) for each car, where the left car is approaching a red light and the right one has just left the intersection after the light turned green. Label your vectors $\vec{v}$ and $\vec{a}$.

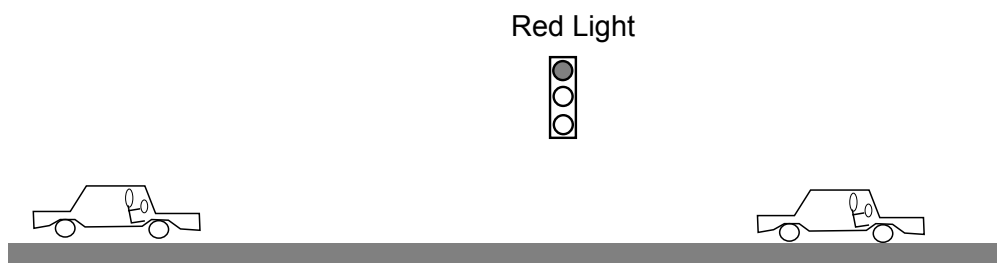

Now choose an x axis along the road by drawing an x - y axis (your *choices* are: the position of the origin, and the positive x direction). Then state whether each vector corresponds to a positive or negative one-dimensional value (you can just draw a “(+)” or “(−)” next to each).

3.1.2 Dynamics: Newton's Law(s)

In 1687, Isaac Newton (English mathematician and physicist) published “The Principia¹,” which revolutionized human understanding of motion and its causes. Prior to Newton, it was believed that the physical law proposed by Aristotle (Greek, 384–322 BCE) explained motion, essentially: *Objects move when pushed, and stop moving when no longer pushed*². Following in the footsteps of Copernicus and Galileo, Newton proposed a better law of motion (**Newton's Second Law**):

$$\text{Objects change their motion when pushed} \quad \text{or} \quad \sum \vec{F} = m\vec{a} \quad \text{or} \quad \vec{a} = \frac{\sum \vec{F}}{m}$$

where $\vec{F}$ is a **force** (e.g., a push or pull interaction), the notation $\sum \vec{F}$ means “the sum of all forces on the object”, and m is the **mass** of the object (e.g., in kilograms). So Newton discovered that interaction *forces cause changes in velocity*. Put another way: if there are no forces acting ($\sum \vec{F} = 0$) then there is no change to the velocity — the object continues to move with the same velocity (vector).

¹It was written in Latin and the full title was: *Philosophiæ Naturalis Principia Mathematica* (Mathematical Principles of Natural Philosophy).

²This might seem like a good law based on your own observations of the world (you're not alone: it held for 2000 years!). But it turns out that it is simply a good law for motion in a frictional fluid, like air. If you add friction to Newton's correct description of motion, you obtain Aristotle's principle.

Go back up to the two accelerating car(s) at the stoplight. Draw a third vector for each car called “ $\vec{F}$ ” to indicate the force direction on the car that is causing its acceleration. What do you think is causing that force on the car(s)? (What is the *object* exerting the force?)

3.1.3 Energy: Mechanical Energy

The origin of the concept of energy in physics is through a quantity called **Work**:

Work is the energy transferred to an object by a force, found as *force times distance traveled*.

or, as an equation:

$$W = F\Delta x = \text{Force} \times \text{distance} \quad (\text{positive when } \vec{F} \parallel \Delta\vec{x}, \text{ negative when opposite})$$

The connection of work to motion is that work causes changes in velocity. Specifically, it changes what is called **kinetic energy** of an object:

$$K = \frac{1}{2}mv^2 \quad (\text{Kinetic Energy, motional energy}) \quad (3.1)$$

by the “**Work-Energy Theorem**”:

The total work on an object is equal to the change in its kinetic energy: $W = \Delta K$.

Another type of mechanical energy is **Potential Energy**, which is stored energy (the potential to do work and cause kinetic energy). Common examples are springs (compressing an object against a spring) and gravity (raising an object up); in each case, “releasing” the object will allow the stored energy to be converted into motional kinetic energy.

For mechanical systems that have no friction, energy is always *conserved*: it can change from kinetic to potential, but will not be lost or gained.

3.1.4 Energy: Other Energy

Materials constructed from atoms (either the free-flowing fluids of liquids and gases, or the rigid lattices of solids) contain **internal energy**. If we think of these systems as just collections of little particles, then: (i) a fluid’s internal energy is determined by sum of the kinetic energy of all particles bouncing around in the container; (ii) a solid’s internal energy is contained in the kinetic energy of the vibrating particles, and in the potential energy of the “springs” that connect them together. When the number of particles in a material becomes very large, we treat the object as a thermal system: the *temperature* is a measure of the average internal energy of the particles.

There are other types of energy, some of which we will consider later: energy from electromagnetic radiation (light), electrical currents, nuclear energy.

3.1.5 Energy: Equilibrium

For an object that is both receiving energy and giving away energy, we say that the object is in **equilibrium** when:

$$\text{Rate of Energy In} = \text{Rate of Energy Out} \quad (\text{Equilibrium})$$

3.2 Experiments and Activities

3.2.1 Motion

Find a “frictionless” track and car and bring it to your lab bench. Set it up and make sure that it is level by adjusting the “feet.” In each of these two experiments

1. On a level track, give the car a kick at one end, and have your partner stop the car before it reaches the other end.
2. Raise one end of the track and give the car a kick (not enough to go off the other end), then catch it.

perform the following tasks:

- Do the experiment with the car (be sure to catch it before it reaches the ends).
- Time the experiment to get a range of times for your experiment.
- Observe the motion of the car during the whole time.
- Plot a position (x) vs time graph, and a velocity (v) vs time graph below it, as we did in lecture.
- Identify on the graph any time periods where the car is *accelerating*. (How can you tell?)

3.2.2 Mechanical Work

Attach a pulley to the end of your track. Cut a long (3 m) piece of string and attach it to the car and to a mass-hanger with some amount of weight.

- Record the amount of mass on your mass hanger (including the hanger itself). Calculate the *weight*³ of this amount using $\text{weight} = F_g = mg$.
- Do a few trials where you release the mass hanger from just below the table, letting it pull the car.
- Construct the position and velocity graphs again for this motion.
- Describe how this experiment relates to *work* and the “*work energy theorem*”.

Return the track, the car, and the pulleys back to their places.

3.2.3 Work and thermal energy

Complete this with your whole table (4 people): one pair doing the stirring and one doing the hand-heating.

- At the sink, fill up a glass beaker with cold water.
- Then fill the two 50 mL graduated cylinders with the same water, to the same level (approximately 20 mL). Record the level and the temperature.
- One pair will attempt to increase the temperature of the water by *mechanical work* (stirring with the plastic rod).

³The Weight of an object is the force of gravity on the object, $W = F_g = mg$, where m is the mass in kilograms, g is the “acceleration due to gravity” (10 m/s^2). The units on this product, kilograms times meters per second squared, are called *Newtons*, N.

- The other pair will attempt to increase the temperature of the water by conduction with your hand.
- Conduct the experiment at least once for two minutes and record any temperature changes.

3.2.4 Equilibrium: Leaky Buckets

Over the next few weeks in class, we will consider the energy equilibrium of the Earth, meaning the balance between the incoming energy per second from the Sun and the outgoing energy per second that the Earth emits into space. It turns out that, while the incoming rate (energy from the sun) is approximately unchanging, the outgoing rate *depends on the Earth's temperature*. As an equation, it looks like this:

$$\text{Rate}_{\text{Sun Energy In}} = \text{Rate}_{\text{Earth Energy Out}}(T_{\text{Earth}})$$

where the parentheses on the right-hand side means that the rate *depends* on temperature. The importance of this dependence is that in a situation of equilibrium (when the left-hand side equals the right-hand side) the result implies a single temperature: we can determine the temperature of the Earth by assuming equilibrium.

Today we will play with an analogy of this situation: a “leaky bucket” that is being filled by a variable-rate pitcher. We will see if the equilibrium flow rate depends on any properties of the system (like the rate of energy into/out-of the Earth depends on its temperature).

Complete the following, using the data table on the next page, and eventually making a graph on graph paper of the last two columns.

- Fill the pitcher of water about 3/4 full.
- Raise the blue “lab jack” up so that the 100 mL graduated cylinder will fit underneath the pitcher spout.
- Place the catch tray below the spout and then connect the aquarium pump: the pump will be sitting on the table with one rubber tube (IN) going into the catch tray, and another rubber tube (OUT) going into the pitcher. You can test that this is working by plugging in the pump and letting the water flow from the pitcher into the catch tray, and back to the pitcher through the pump.
- Place the 100 mL graduated cylinder (GC) in the catch tray and let the water go out of the spout into the cylinder. Record any general observations.
- Now adjust the flow from the spout so that the level of the water in the GC is just a little bit above the hole (couple mL).
- On the table, record the *baseline* level (the value on the GC of the center of the hole).
- In “Approx Level” put “just above hole”, and record its “Exact Level”, and then subtract off the baseline value to get the ΔV value.
- Now remove the GC without changing the flow.
- Use the 25 mL graduated cylinder and the stopwatch to time how long it takes to fill (to the 25 mL line). Record this in your table under “Time to 25 mL”. It would be best to do this three times, take the average and record the average and approximate uncertainty.

You can then calculate the “Flow Rate” (or you can wait to do that later for all of the data you collect).

- In the rest of the rows of the table, choose successively larger flow rates. The “Approx level” could give you a target to try and find (like “twice the ΔV as the first”, or three times, etc), but always record the exact level that you have.
- In the end calculate the height in cm from the ΔV column by measuring the distance on the GC itself.
- On graph paper, make a plot of your data: either Flow rate vs Height, or vice-versa⁴.

⁴When we say “y vs x” we mean “vertical vs horizontal”.

Approx level	Exact Level	ΔV (above hole)	Time to 25 mL	Flow Rate	Height
()	()	()	()	()	()
Baseline Value (Hole Center)					

Be sure to fill in the units in the second row.

Lab 4

Electromagnetic Radiation and Blackbody Radiation

All the light you cannot see

Equipment List

- IR camera (w/ cable)
- NIR security camera (w/ cable)
- “go-pro” camera (w/ cable)
- NIR LED light panel
- wooden block (“stage”)
- bathtoy (“character”)
- 250 mL beaker
- cardboard box
- large (12in square) plastic window
- small (3in square) plastic window
- small plastic window, blacked out
- TV remote
- Silicon disks
- Coke or Diet Coke or Coke Zero
- Faraday Cage with radio

Note: Today will make observations of light with a few different cameras. You will submit on Blackboard the usual pdf of the lab assignment and your written work, but then you can just submit extra images (jpg files) in addition the pdf (**do not print images or add them to your pdf**). If you need to correct a submitted pdf, just submit another one; I will only use the last pdf document. Image files can be obtained from the IR thermal camera by plugging it into the computer with the USB-C to USB cable; it will appear as a drive with a DCIM directory. Images from the “go-pro/active” visual light camera and the near-IR “security” webcam can simply be screenshotted or downloaded using the Camera app on the windows PC. **Every student should get their own copies of the relevant images** and save them to their email or to, e.g., drive.google.com.

4.1 Introduction and Definitions



Today we consider light, in all of its colors/wavelengths. The collection of light of all wavelengths is called the **electromagnetic spectrum** (because light, it turns out is a propagating wave of

electric and magnetic fields). Objects with a nonzero absolute temperature (having any internal energy) will **radiate** light of a wavelength/color that is specific to their temperature. The idealization of this is called **blackbody radiation**, because perfect emitters are also perfect absorbers (“black”).

4.1.1 Electromagnetic Spectrum


Light is an oscillating **electromagnetic wave** with a characteristic wavelength, which we usually write as the greek letter “lambda,” λ . The range of wavelengths that we are able to see with our eyes is called **visible** light and spans a range of wavelengths from $0.40\ \mu\text{m}$ (blueish light, $400\ \text{nm}$) to $0.75\ \mu\text{m}$ (reddish light, $750\ \text{nm}$).

Consider the schematic wave below and the red blood cell given for scale. Sketch two waves, one that has the wavelength of red light, and one that has the wavelength of blue light, making them to scale with the blood cell image.

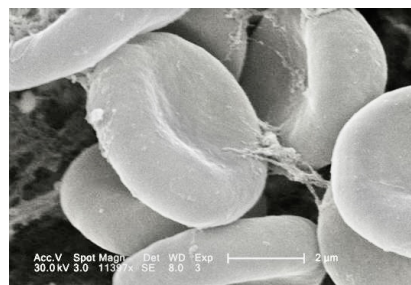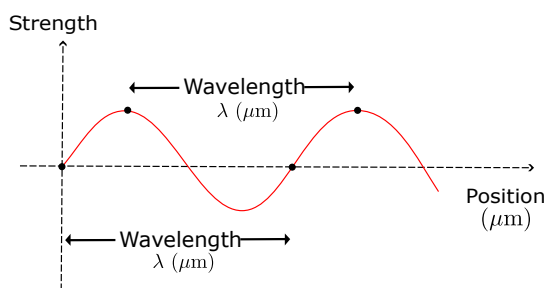

Now consider the rest of the electromagnetic spectrum. We give the names to ranges of wavelength values: gamma-rays, X-rays, ultraviolet, visible, near-infrared, infrared/far-infrared, microwave, radio.

- Look up the wavelength ranges of these types of light and make a table, putting all wavelengths in micrometer (μm).
- On the wavelength axis below (in log scale) show the range of each type of light. [Notice that $10^0\ \mu\text{m} = 1\ \mu\text{m}$ (and $10^1 = 10$, $10^{-1} = 1/10$), and that the midpoint between 1 and 10 on a logarithmic scale is 3.]

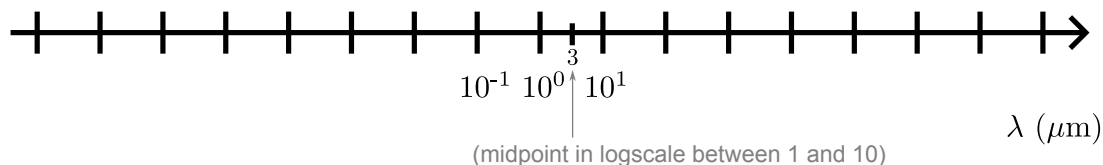

4.1.2 Blackbody Radiation

Any object that has internal energy will have a temperature greater than absolute zero (0 K = -273°C); and it turns out that any object with a temperature radiates light. This phenomena is called **blackbody radiation**. There are a few key equations that describe the amount and wavelength of light emitted by blackbody radiators:

$$\lambda_{\text{peak}} = \frac{2900 \mu\text{m} \cdot \text{K}}{T} \quad \text{Wien's Law, wavelength of peak emission}$$

$$F = \left(6 \times 10^{-8} \frac{\text{J/s}}{\text{m}^2 \cdot \text{K}^4} \right) T^4 \quad \text{Stefan-Boltzmann Law (total flux)}$$

$$F_{\lambda} = \frac{F}{1.5 \times \lambda_{\text{peak}}} \quad \text{Peak value of "Spectral Flux"}$$

Our Sun is the most familiar example of a (nearly) ideal blackbody radiator. It has a temperature of about 6000 K. What is the wavelength of the peak of its blackbody radiation? What is its total flux?

A table is given below showing the spectral emission or sensitivities of equipment we will use in the lab today. Fill in the last column with the temperatures corresponding to blackbody radiators with peaks at the wavelengths given (one temperature if a single value, two temperatures if a range is given). There is space for calculation examples below.

Device	Wavelength range (μm)	BB Temperatures
Mileseey IR Camera	4.6 μm – 11.5 μm	
ELP USB NIR (webcam)	0.4 μm – 1.0 μm	
ELP USB NIR (illuminators)	0.94 μm	
Andoer IR49S LED Panel	0.855 μm	
Andoer IR49S LED Panel	0.855 μm	
AKASO v50 elite action camera	0.40 μm – 0.70 μm	

4.2 Experiments and Activities

4.2.1 Observations of light

We have equipment for observing light in the (far) infrared (the Mileseey camera); in the near infrared (NIR) (the ELP webcam); and the visual range (your eyes and the AKASO “action camera”). For the NIR (and comparisons between NIR and visual) you can put the cameras and objects under the cardboard box to get a dark environment. Objects with a temperature (at your table, around the room) can serve as sources of infrared light. The Andoer LED panel acts as a source of near IR light.

For each item of observation, make and document (with words and images) some observations. Some things to try, and questions to answer:

- Use the infrared camera to observe objects and people (with their permission!) around the room.
- Try to see the “ghosts” of warm objects when they are removed from another object (your hand on the table or wall).
- Spill a bit of water on the floor and see what it looks like.
- See if various lights change in the IR picture when on/off.
- What are warm objects and cold objects in the room ... anything surprising? (Note the temperature output on the image itself).
- Place the security camera and the visual camera under the box with a “stage” (little block) and a “performer” (bath toy animal). How do their view compare?
- Put the NIR LED panel in the box as well, and document the visual and NIR camera views.

- Can you see the NIR LEDs with your eye?
- Can anything see the bulb in the TV remote when you press its buttons?
- How does the NIR webcam see things? Is it the same idea as the IR camera? How do such “security cameras” work, and why are they designed this way?

4.2.2 Observations of transmission of light

Whether an object is called **transparent** or **opaque** turns out to be wavelength dependent. What does this mean in plain language?

Now make some observations. Some things to try and questions to answer:

- Use the “clear” plastic window, with various sources and cameras.
- Use the silicon plates (be careful they are fragile, but you can put your fingers on them) with various sources and cameras.
- Try the glass in the doorway.
- Fill a small beaker with coke. Place an object (pencil?) in it and observe with your eyes, the action camera, and under the box with the NIR camera and/or the visible light camera, with and without the NIR LED panel.
- Try out the “faraday cage” and the AM/FM radio. Two local stations are WGVU (88.5 MHz) and WOOD (1300 KHz). What are the wavelengths of these broadcast stations (calculate using $c = \lambda f$, where the speed of light is $c = 3 \times 10^8$ m/s).
- Does the faraday cage affect cell-phone signals?

Lab 5

Heating by Radiation

Feel sun on your face. No one else can feel it for you.

Equipment List

- Calorimetry kit: Calorimetry can, aluminum cylinder, 250 mL beaker
- Heating by Radiation kit: aluminum block, styrofoam holder with kickstand, no-slip pad, large mass
- Digital thermometer
- 100 mL graduated cylinder
- styrofoam cups (for getting ice)
- incandescent desk lamp
- graph paper
- cooler of ice (for room)
- scale (for room)
- active camera (optional)
- computer (optional)

5.1 Introduction and Definitions

To estimate the energy balance of the Earth, and thus estimate its expected equilibrium temperature, we must first know the input energy to Earth system: the radiation flux (in $\frac{J/s}{m^2}$) from the Sun. Recall our “leaky bucket” experiment: When you increased the flow of water coming out of the pitcher, you observed a rising water level in the graduated cylinder (the leaky bucket), until the point at which the rate of water spraying out of the hole match the incoming rate of flow from the pitcher. When that equilibrium was achieved, there was an equilibrium height of the water above the hole¹. We can make an exact analogy to the energy balance of the earth: the Sun pours energy into the Earth through photons of light; the Earth sprays energy back into space because it has a temperature (specifying its internal energy) and therefore radiates as a blackbody; and when these two rates of flux are equal, the internal energy of the Earth stops changing, leading to an “equilibrium level” of temperature. Today we would like to directly measure the amount of energy being “poured in” by the Sun. (Or, if the Sun does not cooperate, an incandescent light bulb).

¹That height determines the rate of flow out of hole, essentially by conservation of mechanical energy: a larger column of water in gravity, leads to a larger kinetic energy of the exiting water.

5.1.1 First Law of Thermodynamics, Heating, and Calorimetry

In our introduction to the topic of energy — beginning with the work by a force, generalized to include all types energy transfer mechanisms, and all types of internal and external energy types — we emphasized the basic physical law: energy is conserved². Most generally, energy conservation is stated as a law within thermodynamics (the physical topic of heat, temperature, and chemistry) and is given the grand title **The First Law of Thermodynamics** (FLTD):

$$\Delta E_{\text{tot}} = Q + W.$$

This equation pertains to any single object/system that you choose and summarizes the rules we used in the construction of energy flow diagrams: a change in the total energy of an object, ΔE_{tot} , must be exactly accounted for by the energy input to or output from that object (on the right hand side), in the form of **heat flow**, Q , or mechanical **work**, W (these flows, Q and W , are positive when energy is coming into the system, and negative when energy is going out).

Today we will consider a special case of the above equation, where our system consists of two objects brought together at different temperatures. There will be no work done on the system and we will consider the combined system of two objects to be “closed” so that there is no heat flow in or out of the system. In that case, we have:

$$\Delta E_{\text{tot}} = Q + W \quad \rightarrow \quad \Delta E_{\text{tot}} = 0 + 0 \quad \rightarrow \quad \Delta E_1 + \Delta E_2 = 0,$$

which says that the sum of the internal energy changes in the two sub-objects must equal zero. Another way to view the combined system is to break it into two objects. In that case we would have two equations (one equation for each “object” box, in an energy flow diagram):

$$\begin{array}{lcl} \Delta E_{\text{tot},1} = Q_1 + W_1 & \rightarrow & \Delta E_{\text{tot},1} = Q_1 + 0 \\ \Delta E_{\text{tot},2} = Q_2 + W_2 & \rightarrow & \Delta E_{\text{tot},2} = Q_2 + 0 \end{array} \quad \rightarrow \quad Q_1 + Q_2 = 0$$

where the last equation follows from the previous two, plus our prior equation for the combined system (that the sum of the two energy changes is zero). When drawing an energy flow diagram, there is a single transfer arrow between the two objects, which we could label with $|Q|$. In the equation for one object, that transfer is accounted as a positive or negative value depending on whether the flow is into or out of that object.

Consider an example system: cold milk poured into a mug of hot coffee. We will ignore the energy loss out of the system as a whole during the time of mixing, so the above equation holds. Sketch an energy flow diagram for these two objects during the time they are mixing (not yet at equilibrium).

Then write down three FLTD equations, like those above: one for the combined system and one each for the objects in your diagram. Instead of “1” and “2” labels, use “C” and “M”.

²Although it may change its form, and transfer from one object to another, the total amount of energy never changes.

We express heat flow into an object through an equation that demonstrates its change in the internal energy of that object (essentially The **heat capacity** of an object, C , is the constant of proportionality between the heat transfer to/from the object and its internal energy change, as measured by a change in temperature:

$$Q = C \Delta T .$$

This is not a very useful equation because the value of C depends on all of the details of the object. A more fundamental quantity is the **specific heat capacity** (often called simply the “specific heat”) of a *material*, denoted by the lower-case c . This is the heat capacity per mass of an object, so we can write:

$$Q = c m \Delta T .$$

One of the materials with the largest specific heat capacity is water, with $c_W = 4.2 \text{ J/g/K}$. This means that it takes 4.2 J of energy to raise one gram of water one degree Kelvin (which, since $\Delta T_K = \Delta T_{\circ C}$, is the same amount to raise by one degree Celsius). The term “capacity” is used because, once you have added energy to raise the temperature, that energy is essentially stored in the water and can be transferred somewhere else. Other materials that have a lower specific heat capacity, like aluminum, experience a higher temperature increase for the same, 4.2 J, energy input — or, put another way, raising the temperature of aluminum by one degree stores less energy than raising the same amount of water by one degree (aluminum’s capacity to store energy is less than water).

Write down a $Q_1 + Q_2 = 0$ equation for the “milk plus coffee” example above. Again, use “C” and “M” as labels. Then use the above equations containing specific heat to express heat as a temperature difference. The final temperature within the two ΔT ’s will be the same, T_f , but the initial temperatures will be different. Re-write your equation to show this in variables. Then discuss briefly why the two terms will add to zero, knowing what you do about the initial and final temperatures of the coffee and milk.

5.2 Experiments and Activities

5.2.1 Specific heat of aluminum

Before looking at the heating of an aluminum block under the radiation of the sun (or incandescent bulb), we will first determine the specific heat capacity of the material itself. Our experiment will be a very simple calorimetry example: prepare a small aluminum cylinder at a known temperature (letting it equilibrate with ice water) and then drop it into a vat of water while monitoring the temperature of the water. The drop in water temperature at that instant can be associated to a heat transfer from water to aluminum, which causes an internal energy increase (decrease) of the cylinder (water). Knowing the specific heat water (and the masses of both the water and aluminum), we can determine the specific heat of aluminum.

Procedure: Using your own paper to write down observations, keep a data table, and make calculations from equations — take the following basic steps.

- Open up the “calorimetry can” and inspect it. What are the components of it, and what is the purpose of each? (The small cup inside is what you will fill with water).
- Get some ice from the cooler. Create an ice-water bath in your 250 mL beaker and place the aluminum cylinder inside.
- Get hot water from the faucet ($\sim 50^{\circ}\text{C}$) and fill the small calorimetry cup up to about 2 cm (we will measure this amount after the experiment is over).
- Place the cup inside the calorimetry can, insert the thermometer through the “cork” and observe the temperature.
- Start your stopwatch.
- When your thermometer has stopped changing dramatically (when it has come to the temperature of the water), start taking data. These should be time and temperature measurements at approximately 30 second intervals³. It is probably easiest to simply record the time on the stopwatch (4m50s) and then later you can convert that (in an additional column) to the number of seconds (290 s). Create a table of your temperature vs. time data.
- While you are still getting temperature measurements on the water use a second thermometer, to check that the ice water and cylinder mixture is at the right temperature. You can stir it up to make sure it is reaching equilibrium.
- Once you have taken about five minutes of data of the water alone, use the tongs to grab the cylinder and drop it into the warm water (be sure you’re not carrying any ice with you).
- Record the time that the cylinder was added, but let the stopwatch keep running.
- Continue to measure the temperature at stopwatch times for another 5 minutes, again at approximately 30 second intervals.
- Make a graph of temperature vs. time on graph paper. Be sure to choose axes such that your data covers most of the page.
- Using a ruler, make two best-fit straight lines, before and after the time at which the

³If you would like, you could use the go-pro-like camera to record the stopwatch and thermometer — probably best to record with the “time-lapse” feature — and then get (temperature, time) data points by watching the video afterwards. Think carefully about how to do this ahead of time.

cylinder was inserted.

- At the time the cylinder was inserted, draw a vertical line. The intersection of this with your two best-fit lines will give you a ΔT for the water (vertical interval length), as well as the initial and final temperature values of the water.
- Carefully remove the aluminum cylinder from the calorimetry can (without losing any water). Then, using the digital scale, measure and record the mass of the aluminum cylinder.
- Take your small calorimetry cup to the sink, along with your 100 mL graduated cylinder. Pour the water into the graduated cylinder to record the volume of water in the can. (Think ahead of time about how to do this since your water volume will likely be more than 100 mL!) The conversion from volume to mass is the density equation, $\rho = m/V$, where the density of water has the very nice value, $\rho_W = 1.0 \text{ g/mL}$.
- Sketch an energy flow diagram, for the water and cylinder objects, showing the heat flow and energy changes in the time immediately after placing the aluminum cylinder in hot water, but before they reach equilibrium.
- Then write down equations to arrive at a $Q_{\text{Al}} + Q_W = 0$ equation, like you did in the introduction. Use this final equation to calculate the specific heat capacity of aluminum. Recall that the specific heat capacity of water is $c_W = 4.2 \text{ J/g/}^\circ\text{C}$.

5.2.2 Heating aluminum block by radiation

Now that we know the specific heat of aluminum, we can measure precisely how incoming radiation flux causes a temperature increase. In this experiment the heating of an aluminum block will be accomplished by light (from the sun or your incandescent desk lamp) rather than conduction from a hot to a cold object. But the input heat for aluminum can be interpreted with exactly the same equation:

$$Q_{\text{Al}} = m_{\text{Al}} c_{\text{Al}} \Delta T$$

Procedure: Using your own paper to write down observations, keep a data table, and make calculations from equations — take the following basic steps.

- Place your aluminum block into the insulating styrofoam. If there is no hole through the styrofoam for the thermometer, measure the position of the hole in the block and carefully figure out where to pierce the styrofoam such that the thermometer will hit the hole and fit snugly into the aluminum block.
- Prop up the styrofoam at an angle, using its kickstand, the no-slip pad, and a large (e.g., 1 kg) mass.
- Arrange the desk lamp so that it is pointing at the block and quite close ($\sim 5 \text{ cm}$). Tilting the lamp to its side first, before pointing the bulb at the block, can get a better coverage. Record the distance from bulb to block.
- Start your stopwatch.
- Turn on your desk lamp.
- Record (time, Temperature) values in a table, every 30 seconds (or even every minute should be fine) for about 20 minutes. Like the previous experiment, it is probably easiest to simply record the stopwatch time (and later convert it to a number of seconds).
- Make a graph of your data, Temperature vs. time.

- You should see that your data has a region in the middle where the temperature increases approximately linearly, in between time interval with a flatter change (when the block starts heating, and after it is starting to come to equilibrium temperature). Using a ruler, draw a straight line of best fit in the linear region.
- Using two widely-separated *points on the line* calculate the slope of that line.
- This slope, $\frac{\Delta T}{\Delta t}$, can be converted into a $\frac{\Delta E}{\Delta t}$ using the specific heat capacity of Aluminum. Write this out as an equation and then calculate the value.
- The power increase you just calculated can be translated into a flux, by dividing by the area of the aluminum block. Write out an equation for this, and then calculate a value.
- Using your distance to the lamp, you can now try to estimate the power of the light bulb. This is the same procedure we did in class to go from the Sun's power, to its flux at the position of the Earth's orbit, but backwards.

Lab 6

Greenhouse Effect: Light Absorption and Transmission

There's a light.

Equipment List

- Coin
- Ruler
- Stopwatch
- Aluminum block
- Foam holder without kickstand
- Scissors
- Aquarium (no lego top necessary)
- Food coloring set
- Ulanzi (multiple-color-mode LED light)
- Desk lamp
- Blue Tape
- Digital Thermometer
- Apron
- 250 mL beaker
- Stirring stick
- computer
- Bin of 14cm x 20cm mylar sheets (shared)
- Graph paper (shared)
- Gloves (shared)

6.1 Introduction and Definitions

Today we will start investigating how light interacts with matter. In the past few weeks, we calculated the Earth's equilibrium temperature¹ by assuming that it was in energy equilibrium: the incoming average flux from the Sun was exactly balanced by the outgoing (blackbody, infrared) flux of the Earth. When we assumed an Earth without an atmosphere, we found that the equilibrium temperature would be about -18°C (0°F). But when we assumed that there was atmosphere — i.e., a greenhouse gas atmosphere: blocking all of the Earth's infrared light, and then re-radiating as an infrared blackbody, according to its own temperature — then we found that the equilibrium temperature of Earth's surface rises to about $+30^{\circ}\text{C}$ (86°F). Although both

¹See our discussions for the past two weeks, and Chapter 4 in our textbook by Dessler.

of these estimates are incorrect — the actual average surface temperature² of the Earth surface is about 15°C — the presence of the atmosphere and its so-called *greenhouse effect* are incredibly important to make a livable environment.

To understand the greenhouse effect, we must understand why and how the Earth's radiation is captured by the atmosphere. More specifically: why and how is infrared light is captured by molecules of greenhouse gases [e.g., water vapor (H₂O), carbon dioxide (CO₂), and methane (CH₄)]. To answer the “why” we will investigate, in lecture and discussion, the mechanism by which light (electromagnetic waves) interacts with the electric dipole (overall neutral, but a slight separation of positive and negative charges) of these molecules. Interaction with infrared light in particular (as opposed to visible, ultraviolet, and other bands) causes vibration and rotation of these molecules³. Essentially, greenhouse gases are those that have an electric dipole which can be “grabbed” by the light to induce such effects, while non-greenhouse gases [like oxygen (O₂) and nitrogen (N₂)] have no electric dipole, and thus no interaction with the light. Although this explanation comes from the classical theory of electricity and magnetism, the actual interaction is *quantum*. Light is a quanta (photon, packet) of electromagnetic radiation with fixed energy (determined by its wavelength: $E = hc/\lambda$). A photon's encounter with a molecule is a random process in which capture occurs some *probability*. Absorption causes the “excitation” of the molecule, meaning that it will begin to oscillate or rotate. And then the excited molecule lose its excitation by randomly emitting a photon with the same energy (at a random time and in a random direction).

Make a sketch for yourself below of this interaction process in a sequence of three pictures side by side. In the first (left), draw the light photon as a little “bump” with sinusoidal waves inside it, approaching (show a velocity vector) a molecule (e.g., H₂O is a big O ball connected by rods to two small H balls). In the second (center) the photon has been absorbed but now the molecule rotates or vibrates. And in the third (right), the molecule has shot the photon off in a random direction.

6.1.1 The “how” of greenhouse gas absorption: exponential losses

As described above, the “why” of light-matter interaction (the best theory physicists have to explain the process) involves a random capture of photons by molecules, which then redirects the light into a random direction. The net effect of many such encounters — which we might call the “how” of greenhouse gas absorption — is that a beam of light (a beam of many photons)

²In the coming weeks we will account for energy flow through water vapor and derive a more accurate estimate.

³Interactions with shorter wavelength light generally causes things like excitation of the electrons in the atoms, or ionization (removal) of these electrons.

passing into a region with greenhouse gas will lose its forward progress rapidly. Although no energy is lost — each photon is absorbed into rotational/vibrational energy, then re-emitted in a random direction — the number of photons that pass completely through region will drop off exponentially (literally!) with distance. Let's perform a small experiment to see why that is the case.

Using the table on the next page perform a coin-flip experiment. Each row in the table corresponds to an incoming photon of light and each column at right corresponds to a layer of the atmosphere. The first column should be the label of the photon; label them 1–20. The second column will be the “zeroth layer.” Put a mark in the box for each row/photon of that second column to indicate that the photon is traveling to the right prior to any encounters. The third column is the first layer. In this column, you will put a mark only if the photon has passed through the layer without being captured. You will determine the fate of each photon by flipping a coin: each photon has a 50% chance of passage. So, flip the coin 20 times to determine whether each row in the first later gets a mark or not. In the next column (the second layer) you will only flip a coin for the photons/rows that made it through the first layer. And so on, until you have no more photons.

Now make a data table below with two columns, (N_{layers} , N_{photons}), showing the number of photons surviving after each layer. On the computer, open a google sheets document⁴ enter this data (with column headers for the titles). Make a plot of the data using the following steps:

- Highlight the two rows of data (including header names).
- Select *Insert/Chart*. And a chart will appear showing your data.
- On the *Chart Editor* at right, change the *Chart type* to *Scatter*.
- Make a second chart following the same previous three steps. Click on the vertical axis labels to bring up the *Vertical Axis* menu. Check the *Log Scale* check box.
- Now click one of the data points to bring up the *Data Series* menu. Check the *Trendline* box. Change the *Type* to *Exponential*. Then choose *Use Equation* under *Label*.

Now upload your data to the common spreadsheet for the class. Once everyone has done so, make one more graph using the average data for the class. Comment on what the graphs look like (in particular, how does an exponential function look when plotted in a “log-linear” fashion). Speculate what these results mean for the Earth's light passing into the atmosphere.

⁴At: sheets.google.com

[illegible]

6.2 Experiments and Activities

6.2.1 Cooling by radiation, with blankets

We will revisit our aluminum block from last time, but this time we will heat it up and watch it lose its heat to the environment. You will heat the aluminum block to approximately 50°C (as you see below, we will just put it in warm water this time), then place it in its little foam holder and measure the temperature over time to estimate again $\frac{\Delta T}{\Delta t}$.

Draw an energy flow diagram for the block below (after it has been heated and left in its holder) and say a few words about how you think the cooling takes place, i.e., what are the mechanisms of energy flow out of the block that cause its decrease in internal energy.

In our experiment, however, each pair of experimenters will use a different number of mylar (“shiny space blanket”) sheets to cover the block during the time it is cooling. Draw a second energy flow diagram for this situation (it will be essentially the same as our diagram for the Earth with atmosphere, from Discussion last week, but not in equilibrium), and discuss the differences.

Procedure: Using your own paper to write down observations, keep a data table, and make calculations from equations — take the following basic steps.

- Prepare a space blanket for your aluminum block by taping together one or more mylar sheets. We will discuss with the whole class to get a variety of layer numbers among all pairs.

- Using tape, attach the blanket to end of the foam holder that has a hole in it. Poke your thermometer through the blanket such that it goes through the hole (and can enter the aluminum block).
- At the sink, run the hot water into the provided trays until they are filled with approximately 50°C water. Drop your aluminum block inside and let it warm up for a minute.
- Bring your aluminum block back to its holder, cover it with its blanket. Insert the thermometer and make sure it goes into the aluminum block before taping down the blanket to the other sides.
- Start your stopwatch and start taking (time, temperature) data. You might use a google sheets spreadsheet with columns for [minutes, seconds, t (s), T (C)]; that makes it easy to write down the time on the stopwatch (mm:ss) and later calculate how many seconds have elapsed for the " t (s)" column.
- Take data for 10–15 minutes, about once a minute.
- Remove and disassemble your space blanket, returning the individual mylar sheets to their bin.
- Make plot of your data using graph paper.
- Using a ruler, draw a best-fit line through the data. Calculate the slope using two widely-separated points *on your line of best fit*.
- Upload your value of $\frac{\Delta T}{\Delta t}$ to the common class google sheet, indicating the number of mylar layers used in your blanket.
- Later, if time permits, use google sheets to plot all of the data from the class: $\frac{\Delta T}{\Delta t}$ vs. N_{layers} .

6.2.2 Transmission of light through water (with colors)

Here we will determine how food coloring changes the amount of light that passes through water in the little aquariums provided. You have a light source (“Ulanzi”) that can provide white light at different temperatures and intensities, as well as single-color light at different intensities. We will pass that light through the water and observe how much gets through (when clear, and with multiple drops of food coloring added), using an app on your phone called the “Physics Toolbox Sensor Suite”. Go to your app store now and try to install that app for at least two phones at your table. Once you have the app, you will use the “Light Meter” mode. Let me know if you have trouble getting it.

Calibration

To start we will determine the sensitivity range of our phone cameras. Fill your aquarium almost full of water. Turn off the classroom lights and give yourself some personal light with the desk lamp but not pointed toward your aquarium (you want the phone app to observe only the light from the Ulanzi). Put the light source pointing into the water at the center of one of the long sides. You might place the light on its flat side, and elevate it above the table (on masking tape or other platform) to make sure it is flush to the side of the aquarium, while still being fully below the water. Then place your phone on the other side. Adjust the app so that camera being used is pointing through the aquarium. Turn on the light with the switch on the side. Change modes by holding down (long-pressing) the button-wheel on back. Change between Intensity and Temperature/Color by short-pressing the button. Turn the wheel to change the values. As you take data you can hold your phone in your hand to make it flush with the side as well. Move the phone around until you get the maximum Lux reading and record that.

Procedure:

- Set your light on white light (long press to get to that mode), but at a lower temperature than then Sun (so maybe around ~ 3000 K). Turn up the Intensity. (Single pressing the button takes you between Intensity and Temperature.)
- Place your phone in position so that it is observing through the aquarium and is giving a “Lux” value.
- In a new Google Sheets document, make a table with (Intensity, Lux) columns. Intensity is the thing shown on the light itself (between 0 and 100) and Lux is what is read off the phone app.
- Turn down the Intensity of the light and record a new value. Repeat this procedure multiple times so that you can see how your phone observes different intensities. What you should find is that there is a large range of intensities where the phone camera is saturated⁵, meaning that you always get the same, maximum, Lux value. Take a few data points in this range and then turn down the Intensity such that the Lux values start changing, and take more (5–6) data points in that range.

⁵On my old iPhone, saturation happens between 20% and 100% for the “5800 K” light, but on newer phones, the camera is saturated all the way down to 2% Intensity! With a “3000 K” light you should be able to find an unsaturated range below 20%.

- Using Google Sheets, make a graph of this data (Lux vs. Intensity). You should find that there is a saturation value for your phone, but that for Lux values well below that, it is approximately linear.
- Write down the max “Lux” setting that you can trust (this should be a value below the curve starts to saturate).

Experiment

Now we will consider how the light passing through the aquarium changes as you put more and more drops of food coloring into it. At your table of four, each pair should choose a different color (use Blue or Red). You can test your dropper skills in a 250 mL beaker of water before dropping into the aquarium. There are aprons and gloves available to protect you from food coloring drops. Set the initial light brightness (as measured by your phone) so that it is not oversaturated, as you determined in the “Calibration” section.

Before performing the experiment, read through the procedure. Give a brief statement below about what you expect to see in the final graphs.

Procedure:

- Make a new table of “Lux” vs. number of food coloring drops. You can do this in Google Sheets. You will have three “Lux” columns for the intensity observed in White, Red, and Blue light.
- Before putting any drops in, choose an intensity for your light (checking to see that the measured Lux is ok) and then record the “zero drops” value of Lux for Red, Blue, and White light.
- Add one drop of food coloring to your aquarium and stir until homogeneous (practice the dropping in the beaker).
- Record the Lux values for the three colors of light again.
- Repeat for 2, 3, 4, 6, and 8 drops.
- Use Google Sheets to make a graph of your three data sets (all on one graph: highlight the N_{drops} column together with the three Lux columns).
- Change your vertical axis scale to logarithmic, and get the exponential fit line and its equation displayed.

Returning to your predictions before the procedure, comment on whether you were correct. What did you see, and what does it mean?

Lab 7

Evaporation of water by boiling

water water every where

Equipment List

- Ruler
- Stopwatch
- Digital Thermometer
- Apron
- 250 mL beaker
- mini scale
- hot plate
- tongs
- safety goggles

7.1 Introduction and Definitions

Today we begin a serious study of water. Water is of course directly important to life on Earth — it played a key role in the evolution of life from microscopic organisms to the zoo that currently populates the planet (including ourselves!), and our bodies are more than half water by weight — but it is also a key factor in controlling the Earth's climate. Over the past week we showed that water (H_2O) is an asymmetric molecule with a permanent electric dipole moment and, more importantly, it has a *changing* dipole moment when vibrating or rotating. We discussed the implications of this for the greenhouse effect. Sketch a 3D picture of the water molecule (recall that it is *tetrahedral* if you include the “lone pairs” on the oxygen atom) and discuss very briefly the implications of its shape and its electric dipole moment on our climate.

This week and next we will discuss a second important way that water influences our climate — and contributes to the full answer of the question that drives the first half of this course: *What is the expected equilibrium temperature¹ of the Earth?* The mechanism of this influence is essentially the same one that our body uses to cool us when exercising: *perspiration*. Say a few words about how perspiration works for the human body — and maybe also note some conditions that prevent it from working, or decrease its efficacy — and try to make an energy flow diagram demonstrating why the internal energy of a body decreases during perspiration.

Check in with your neighbors and instructor regarding the answers to the questions in this section.

7.1.1 Phase transitions and water

On one of the following pages you will find what is called a **phase diagram** for water. A fixed volume/amount of water under various temperature and pressure conditions will take different forms: solid, liquid, or gas/vapor. Note that the “pressure” axis has a logarithmic scale to show a wide range of values. Let’s explore this diagram a little bit. First, from your own personal experience, describe these three phases of water very briefly.

Temperature should be familiar to you. Remind yourself and your neighbors what a few familiar values in Fahrenheit correspond to in the Celsius and Kelvin scales.

Pressure might be less intuitively familiar. You may have personally experienced pressure when diving to the bottom of a swimming pool. If you’re not familiar with the effect, find someone in your group who has experienced it, and ask them to describe how it felt. This experience is due to an *increase* in pressure — on top of the normal **atmospheric pressure** value of our surrounding air² — due to the *weight of water* above you. Now, knowing that the pressure *outside*

¹Recall our prior calculations: (i) the balance of the Sun’s incoming radiation flux with the Earth’s outgoing infrared radiation, $F_{\text{sun}} = F_{\text{earth}}(T)$, led to an equilibrium temperature of about -15°C ; (ii) assuming an atmosphere that blocks all infrared light from the Earth’s surface (and then re-emits it both out to space and back down to the surface) we found an equilibrium temperature of about $+30^{\circ}\text{C}$. Neither of these is yet correct, since our average surface temperature is about $+15^{\circ}\text{C}$.

²Atmospheric pressure is also the value of the water pressure at its surface.


of our atmosphere is zero (space is a “vacuum”), and making an analogy to the swimming pool, describe why there is a non-zero atmospheric pressure at the surface of the Earth.

Look up the value of our atmospheric pressure (pressure is force per area, and the standard unit is the *Pascal*, with $1 \text{ Pa} = 1 \text{ N/m}^2$). Also look up how much its value varies over a few days (pressure is a standard parameter reported with the weather). State these values below and then show the approximate atmospheric pressure value on the phase diagram using a ruler to make a horizontal line across the whole figure.

Now consider the process of water **freezing**. Along the line of atmospheric pressure, draw a point **A** that sits in the liquid water section. Note its temperature, T_A . Then draw an arrow along the line of atmospheric pressure toward solid water. Which direction are you going (in temperature) and at which temperature — call it T_f , the temperature of freezing — does the phase change from liquid to solid? Also: how much would your answer for T_f have changed if the atmospheric pressure line was different (e.g., ten times bigger or smaller).

Today we will focus on the process of **vaporization** (or, *evaporation*, or *boiling*). Go back to your T_A point and draw an arrow toward vapor. Which direction are you going (in temperature) and at which temperature — call it T_v , the temperature of vaporization — does the phase change from liquid to vapor?

How much would your answer for T_v have changed if the atmospheric pressure line was different (e.g., ten times bigger or smaller)? Is this the same or different than what you found for the liquid-solid transition?

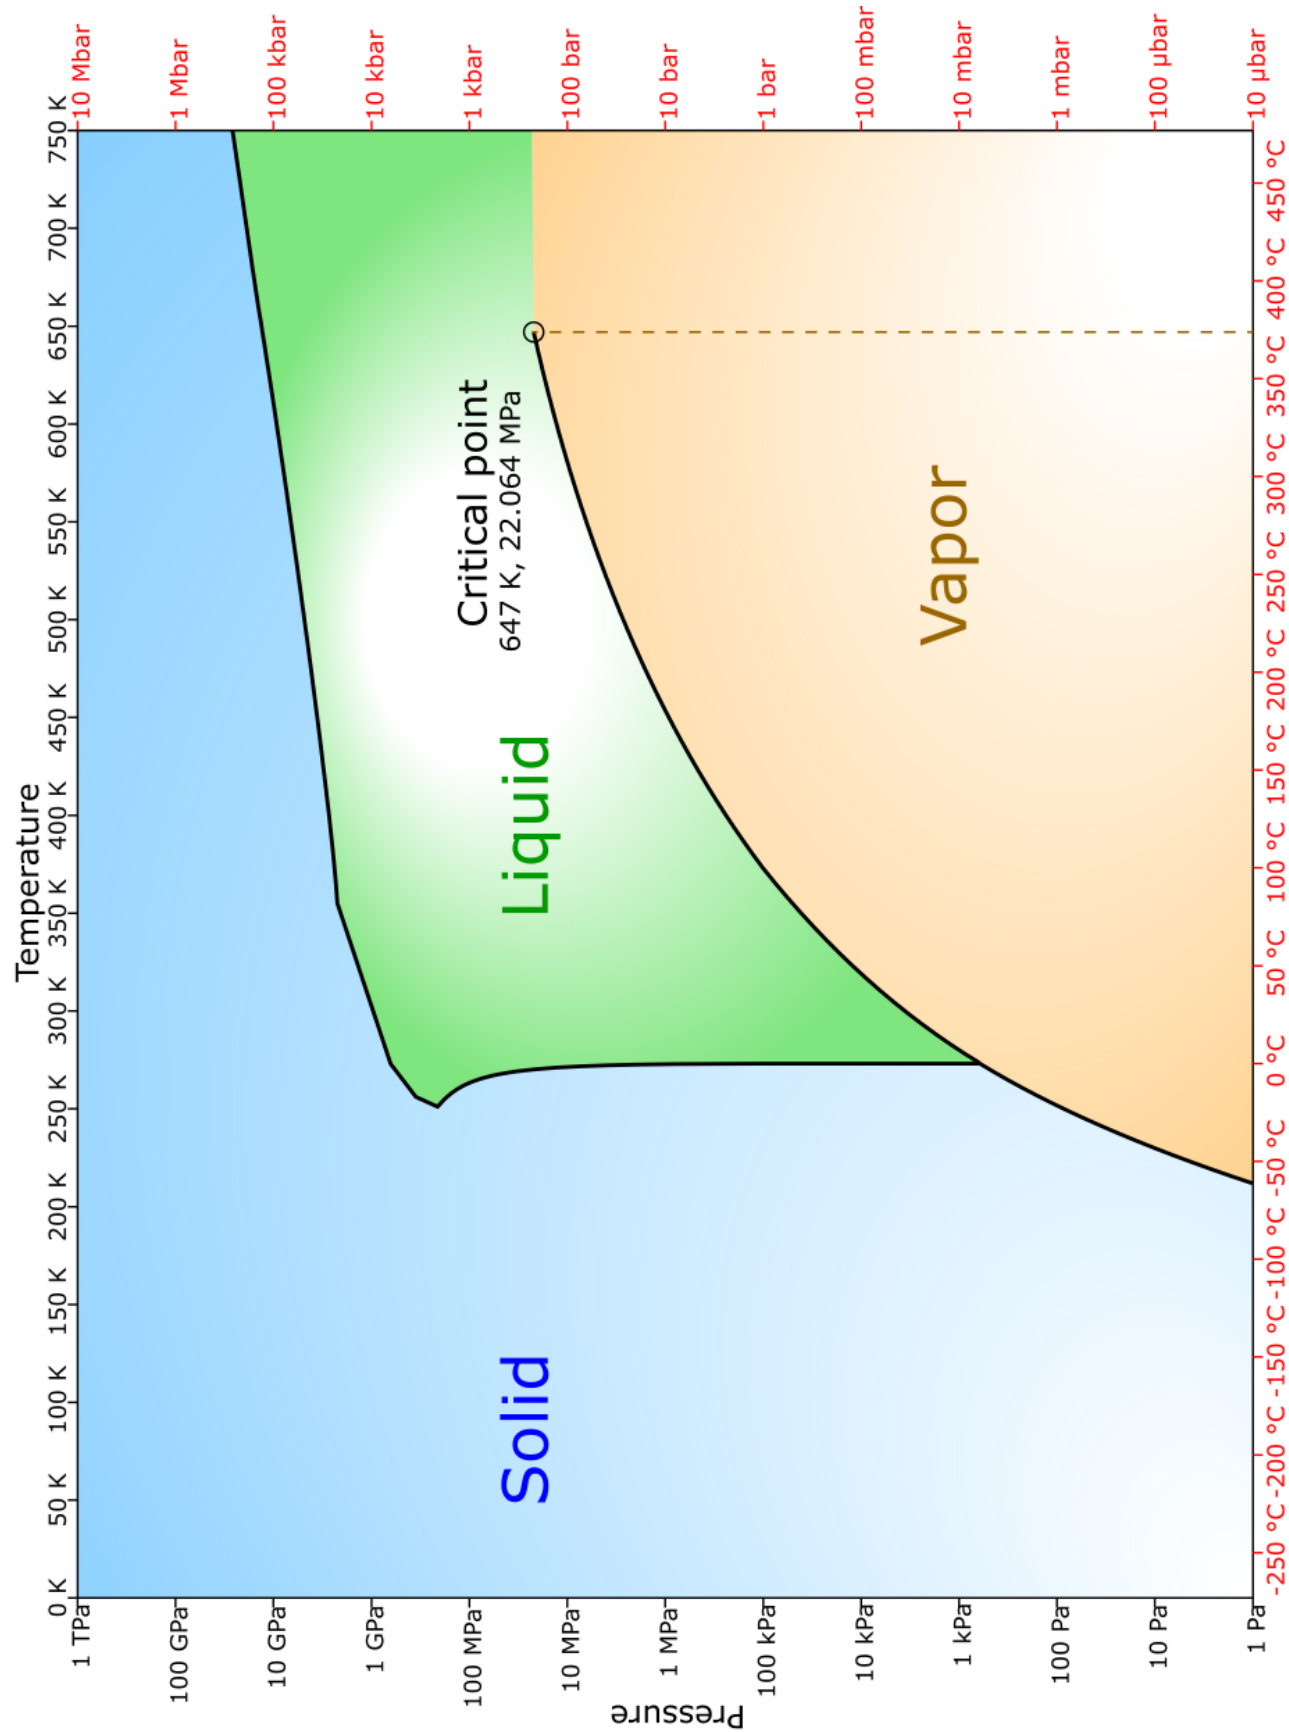

7.2 Experiments and Analysis

Safety Note: We will boil water on the hotplate today, and will repeatedly transfer it back and forth from the hotplate to the scale to measure mass. You should take great care in this procedure, i.e., focus on tightly grasping the tongs around the beaker, just below the rim, during each transfer. Do not get distracted by other tasks or your partners while doing so. As noted in the procedure below, it is recommended that you alternate your temperature and mass measurements so that you don't try to do two things at once. You should also be wearing long pants and closed shoes so that if boiling water were to spill you would be partially protected. But everyone should be alert and aware during the boiling procedure as well. You will wear safety goggles for the boiling procedure to protect your eyes (these can be worn over glasses).

7.2.1 Boiling water!

We will take data on the process of vaporization using a hotplate and about 200 mL of water in a 250 mL beaker. Our goal is to monitor both temperature and mass over time and then use the rates (of temperature increase before the "boiling point", and mass decrease after) to determine the so-called latent heat of vaporization, L_v .

Read through the entire procedure before beginning. Listen to tips on safety and effectiveness from your instructor.

Procedure: Using your own paper (and/or a Google sheets spreadsheet) to write down observations, keep a data table, and make calculations from equations — take the following basic steps.

- I would recommend a google sheets spreadsheet with these columns: [minutes, seconds, t (s), M_{tot} (g), T (C)]. Then in the first two columns you can just record the time on your stopwatch (e.g., 3:53 is 3 in the minutes and 53 in the seconds column). Later you will calculate the " t (s)" column values using an excel formula like " $=b2*60 + c2$ ".
- Place your empty beaker together with your digital thermometer on the mini scale and measure their mass together. Record this value so that you can subtract it off from your mass measurements in the end.
- Put about 200 mL of tap water in your beaker. With the thermometer inside, place it on your scale to get an initial mass measurement (your mass measurements will always include the beaker and thermometer).
- Start your stopwatch.
- Turn on your hotplate to 450°C and place your 250 mL beaker of water (with thermometer) on its center.
- Use the blue labjack to arrange your miniscale so that it is immediately to the side of your hotplate and at the same level, so that transfers back and forth will be easier.
- Start taking data of temperature and mass, at approximately 1 minute intervals for each. I would recommend alternating every thirty seconds between mass and temperature, so that you don't have to take the temperature while measuring the mass. It is perfectly fine for

the temperature and mass values to be recorded at different times.

- For mass measurements, carefully grip the beaker with the tongs and carry it over to the scale. Release it and have a partner record the mass measurement. Then grip it tightly again and bring it back to the hotplate. This should take about 10 seconds out of every minute of warming. Always be careful, but don't remove the beaker from the hot plate for very long.
- For temperature measurements, raise the thermometer above the bottom of the beaker and use it to stir for a few seconds before recording a measurement.
- Take data until the temperature reaches the boiling point, and then continue for at least 10 more minutes afterwards.
- When the experiment is finished, turn off the hotplate and move the beaker onto the table to cool.

Analysis (1st Try)

- In your data spreadsheet, create a time column in seconds, as described above. Also create a new m_w column by subtracting off the beaker plus thermometer mass from all of your M_{tot} values.
- Create two new sheets within your google sheets document for Mass and Temperature. Transfer your mass and temperature measurements to their own sheets (highlight the data cells, choose *Edit / Copy*, and then use *Edit / Paste Special / Values*). Within each of these new sheets, delete any rows that do not contain that type of measurement.
- Make a graph of m vs. t on your Mass sheet; and a graph of T vs. t on your Temperature sheet. (Recall: Highlight two columns; *Insert / Graph*; choose the *Scatter* type).
- Look at your temperature graph and choose an interval of time prior to the boiling point³. Note the values of the average temperature and average mass during that time interval (an eyeball estimate is fine).
- In your Temperature sheet, copy the (t, T) values in your chosen time interval into two new columns. Make a chart using these new columns to get another T vs. t graph with only your selected data⁴. Click a datapoint in the graph to bring up the *Series* menu. Select a *trendline* and change the *Label* to show the fitted equation. Write down its slope as $\frac{\Delta T}{\Delta t}$.
- On the Mass sheet, choose an interval of time from your m vs. t graph after the boiling point was reached. Like you did in the previous step, copy only that data to new columns and make a new graph with a trendline. Record the absolute value of the slope as $\left| \frac{\Delta m}{\Delta t} \right|$.
- Follow these steps to write down two equations that express energy conservation, one during a time interval before the boiling point and one during a time interval after the boiling point.
 - (i) **Conservation of energy prior to boiling:** Recall from Lab 5 ("Heating by radiation") that heating causes temperature changes in this way

$$\Delta E_{\text{input}} = m_w c_w \Delta T$$

where ΔE_{input} is the (unknown) amount of heat energy from the hot plate into the

³There will not be any interval where the graph is exactly linear, but linearity can be approximated over any short time. Just avoid the early times when the hotplate was still heating up to its fixed temperature.

⁴This process is necessary because (i) Google Sheets doesn't allow you to do a trendline to only part of the plotted data, and (ii) Google Sheets doesn't allow you to put a second series on the same chart.

water over a certain interval of time, Δt . Recall also from Lab 5 that c_w is the *specific heat capacity* of water, which we will assume to be that of pure water: 4.2 J/g/K. To use the slope from our temperature graph, we divide this equation by Δt to obtain:

$$\frac{\Delta E_{\text{input}}}{\Delta t} = m_w c_w \frac{\Delta T}{\Delta t} \rightarrow P_{\text{hotplate, before}} = m_w c_w \left(\frac{\Delta T}{\Delta t} \right)$$

where the energy per time provided by the hotplate can be called its “power” input.

- (ii) **Conservation of energy after boiling** After full boiling starts, you should have observed that the temperature is almost exactly constant at 100°C. Therefore, no energy being used to raise the temperature of water, since $\Delta T_w = 0$, and the term with heat capacity will not appear in our equation. Instead, the heat transferred from the hot plate causes only the transition of water from liquid to vapor. This is accounted for by our **latent heat of vaporization equation**

$$\Delta E_{\text{input}} = |\Delta m| L_v \rightarrow \frac{\Delta E_{\text{input}}}{\Delta t} = \frac{|\Delta m|}{\Delta t} L_v \rightarrow P_{\text{hotplate, after}} = \left| \frac{\Delta m}{\Delta t} \right| L_v$$

The first equation states that the energy input from the hotplate in some time interval, Δt , causes a mass loss $|\Delta m|$ of liquid water into vapor (the absolute values are because the *change* in liquid mass is actually negative). By dividing that equation by the time interval we have obtained an expression containing our mass graph slope, $\left| \frac{\Delta m}{\Delta t} \right|$.

- We now assume that the energy input to the water from the hotplate during the period before boiling is the same as the energy input after boiling. Therefore we can write:

$$P_{\text{hotplate, before}} = P_{\text{hotplate, after}} \\ m_w c_w \left(\frac{\Delta T}{\Delta t} \right) = \left| \frac{\Delta m}{\Delta t} \right| L_v$$

Solve this equation for L_v and then plug in all of the numerical values you have collected.

- The correct value for the latent heat of vaporization of water is $L_v = 2265$ J/g. How did you do?

Analysis (2nd Try): You might have noticed that the mass of water is decreasing slightly *prior to boiling*. This means that some of the energy from the hotplate is going into vaporizing water before the boiling point. Therefore our first equation in the prior analysis is wrong. If we estimate the mass loss prior to boiling and account for it, we can get a better estimate of the latent heat value.

- Using your mass graph, and methods similar to those described above, obtain a $\left| \frac{\Delta m}{\Delta t} \right|$ value for the same time interval you used to obtain $\frac{\Delta T}{\Delta t}$. We can call this $\left| \frac{\Delta m}{\Delta t} \right|_{\text{before}}$.
- Write down a new version of the first equation, starting from:

$$\Delta E_{\text{input}} = m_w c_w \Delta T + |\Delta m|_{\text{before}} L_v$$

This says that the energy input from the hotplate goes into *both* heating the water and vaporizing some water. Divide by Δt to get a new power equation for “before”.

- Do the same analysis as before, equating power before and after, and solve again for the latent heat of vaporization. Notice that you have two L_v variables this time, so you must combine and isolate them before plugging in numbers.

Lab 8

Evaporation and Clouds

Show me my silver lining

Equipment List

- Ruler
- Hygrometer
- Digital Thermometer
- Ulanzi light / flashlight
- 250 mL beaker (2)
- 500 mL beaker
- Cloud chamber kit (cube with tube, felt, alcohol, caulk, baking tray, black vinyl, uranium rock)
- Tall cloud jar w/ metal bowl for lid
- Short cloud jar w/ glass bowl for lid
- Dry ice chunk (instructor-provided)
- Regular ice (in cooler)

8.1 Introduction and Definitions

8.1.1 Atmospheric pressure and a warm-up experiment

We have read that the the average atmospheric pressure at sea level on the Earth is about one kilogram force-equivalent per square centimeter of area ($2.2 \text{ lb/cm}^2 = 14.2 \text{ lb/in}^2 = 14.2 \text{ psi} = 101 \text{ kPa}$). This pressure is literally the weight of the column of air above us. Because liquid water is so much denser than air one can achieve an additional 1 atm of pressure by submerging below just 10 m of water¹. Air pressure drops off exponentially with height in the atmosphere with a *scale height* (distance over which it drops by a factor of $\frac{1}{e} \approx \frac{1}{3}$) of 8 km, going to zero pressure — a so-called *vacuum* — in space. The air pressure at Mount Everest base camp, 5,400 m above sea level, is about half what it is at sea level: $\sim 50 \text{ kPa}$.

Mini-experiment: We do not “feel” the air pressure because it has the same value outside of our bodies (the air molecules beating against our skin) as it does internally (the water and blood molecules below our skin). But there is a simple experiment we can do to observe its effects:

¹The pressure increase from the surface of a fluid to a depth h is given by the equation $|\Delta P| = \rho gh$, where ρ is the density of the fluid (1000 kg/m^3 for water) and $g \approx 10 \text{ m/s}^2$ is the acceleration due to gravity.

evacuate the air in a soda can. Together with your table of four students, put a tiny amount of water into an empty soda can. Heat this on a hot plate until the water is boiling and, most importantly, the can is filled with water vapor². By filling the can with pure water vapor, most of the air has been pushed out of the can. If we could then rapidly condense the water vapor into liquid we would have an approximate vacuum inside the can (because the volume of *liquid* water associated to a can full of water *vapor* is miniscule). Do this with your group by gently but quickly removing the can from the hotplate with tongs, and then turning it upside down in a bowl of cold water. Observe any noticeable effect on the can and document the experiment here.

8.1.2 Relative humidity, absolute humidity, partial pressure of water

Last week in lab we boiled water in a 250 mL beaker. We observed that, as expected for our classroom conditions at atmospheric pressure, boiling occurred when the water reached 100°C. Look back at the phase transition graph that you marked up last week, pressure vs. temperature, and remind yourself why this was expected, i.e., following the horizontal line of $p = 1$ atm to the **coexistence curve** between liquid and vapor water. You should have noticed in this experiment, however, that there was significant mass loss of liquid water prior to the “boiling point.” Mass of water dropped off rapidly once the water temperature reached 100°C (in some experiments at a rate of about 3.5×10^{-2} g/s), but there was a measurable mass decline when the temperature was in the range 50–100°C as well (a rate of about 1.0×10^{-2} g/s). The reason for this behavior is because:

- (i) The phase diagram we used last week pertains to *pure water*, i.e., liquid water in a closed container with only water vapor and ice. This interpretation is good for water in the bulk of the fluid, below its surface. Once the internal liquid water molecules reach 100°C the intermolecular forces weaken and they are likely to separate from their neighboring molecules to form water vapor instead, which then bubbles to the surface (“boiling”).
- (ii) Water molecules at the surface, however, are exposed to air, so they are *not* in a “pure” liquid-vapor water situation. Generally air contains only some small percentage (mole fraction) of water vapor. It turns out that³ the same phase transition graph can be used to determine the coexistence curve, but the pressure value one should use is the so-called

²As we will “see” today, actual water vapor is invisible, so we only see its presence in the moments that it comes in contact with colder air and condenses into tiny liquid drops.

³The physical reason for this result is due to the ideal gas law, where, as long as the densities are quite low, all types of gas molecules treated as the identical non-interacting particles; so the liquid water at the surface only “sees” a low-density water-gas within the total air gas.

partial pressure of water in air:

$$e = f \times p_{\text{atm}} = \frac{n_{\text{H}_2\text{O}}}{n_{\text{H}_2\text{O}} + n_{\text{dry air}}} \times p_{\text{atm}}$$

where e is the variable⁴ generally used for partial pressure, and n is the variable for the number of moles, so f is the *mole fraction of water in air*. Because the mole fraction of water in air is generally significantly less than one (on the order of 1%), the partial pressure of water in air is significantly less than atmospheric pressure.

So, your boiling experiment was actually two separate experiments occurring at once: a pure-water phase transition occurring below the surface, and a liquid-to-vapor-in-air transition occurring at the surface. Make a sketch of your boiling water beaker and use arrows to label the two different water vapor pressures at the two different locations. Give these pressures their variable names and estimate their values roughly (using the “1%” estimate given above).

We will do this more precisely in a moment, but quickly return to your phase diagram from last week and estimate a vaporization temperature for the water at the surface, where $e \approx 0.01 \times p_{\text{atm}}$. Record an approximate temperature value (as best you can read off that graph) here.

The vaporization temperature for liquid water in contact with air is called the **dew point temperature**. Let’s determine this value more carefully. First look up the “current conditions” on a weather page (e.g., search for “NWS 7-day grand rapids”) and record the current temperature, the **relative humidity** (expressed as a percentage), and the dew point temperature. [Note: If it is currently raining and/or the humidity is greater than 90%, choose a different data point within the “3 Day History” when the humidity was lower.]

⁴This is not the same “ e ” mentioned above in the “scale height” discussion; that was the exponential constant, or *Euler’s number*, $e = 2.718 \dots$

Now examine the so-called **psychrometric chart** shown in Figure 8.1. Use your temperature (horizontal axis) and relative humidity (curved lines labeled at top) values to determine the associated **absolute humidity** (vertical axis), which is expressed here as a ratio of water mass to (dry) air mass:

$$AH = \frac{m_{\text{H}_2\text{O}}}{m_{\text{dry air}}}$$

To determine the partial pressure of water in air, we must find the mole fraction, f , from this quantity. Let's derive the relationship between AH and f now. (i) Recall that the number of moles of a gas can be expressed as $n = m/M$ where m is the actual mass of the volume of gas and M is the **molar mass** of the gas (read off the periodic table). Find M for both water and for dry air. Remember that air is basically 80% nitrogen (N_2) and 20% oxygen (O_2), so $M_{\text{air}} = 0.8M_{\text{N}_2} + 0.2M_{\text{O}_2}$.

(ii) Now write out the *mole ratio* $n_{\text{H}_2\text{O}}/n_{\text{air}}$ and simplify it so that it is expressed in terms of AH.

(iii) Write out the equation for the mole fraction of water in air, f , given implicitly in the equation for partial pressure above. Using the mole ratio, you should be able to re-write this in terms of the AH value and some numerical value that comes from the molar mass values calculated above.

Check your answers with your table and your instructor.

Now convert the AH value you found from the psychrometric chart into a mole fraction value, and, finally, use that to calculate a partial pressure value, e , in atmospheres (atm).

Finally, using the new phase diagram provided in Figure 8.1, determine the vaporization temperature of water in air, given the partial pressure you determined. Compare this to the dew point value in the weather report.

You should find in the weather data, and in your calculated verification, that the dew point temperature is well below the air temperature. What do you think are the implications of this fact? What will happen if you spill water on the table? What is the meaning of “relative humidity,” and what happens to the relative humidity as the air temperature decreases to the dew point? How does the “distance to the dew point” (and the relative humidity) affect your body’s ability to cool by perspiration?

8.2 Experiments and Analysis

Safety Notes:

- For the “cloud chamber” experiment, your instructor will provide you with a chunk of solid carbon dioxide (“dry ice”). This is about -80°C and it will burn you if you touch it. So, please **use the thermal gloves to handle the dry ice** if you need to (but you probably won’t need to handle it).
- Also for the cloud chambers, you will be provided with a small radioactive rock (containing uranium and other things). As we will see, this emits “alpha particles” (helium nuclei). These particles are not able to penetrate your skin and are therefore safe. However, you would not want to consume these rocks as the alpha particles could damage you internally. So do not eat the radioactive rock, and also **do not touch the radioactive rock without nitrile gloves**. If you do happen to touch the rock, then wash your hands carefully.

8.2.1 Observing the dew point and frost point

We will not be performing our experiments outside, so we need to calculate the partial pressure of water for the conditions in this room. Measure the temperature of the room with the IR thermometer gun (look at a bunch of objects that should be in thermal equilibrium with the air), and the relative humidity using the hygrometer. Also give uncertainties for these measurements (and your rationale for these values).

Use the process from the introduction to convert your relative humidity value to an absolute humidity (AH) and finally to a partial pressure, e , in atmospheres. Then use the coexistence curve in the phase diagram to determine the vaporization temperature (the dew point) in this room. Record the value and any intermediate calculations here.

Put some “cold” tap water in a 250 mL beaker and measure its temperature. Then slowly add ice to the water to reduce its temperature. Observe what happens to the outer walls of the beaker.

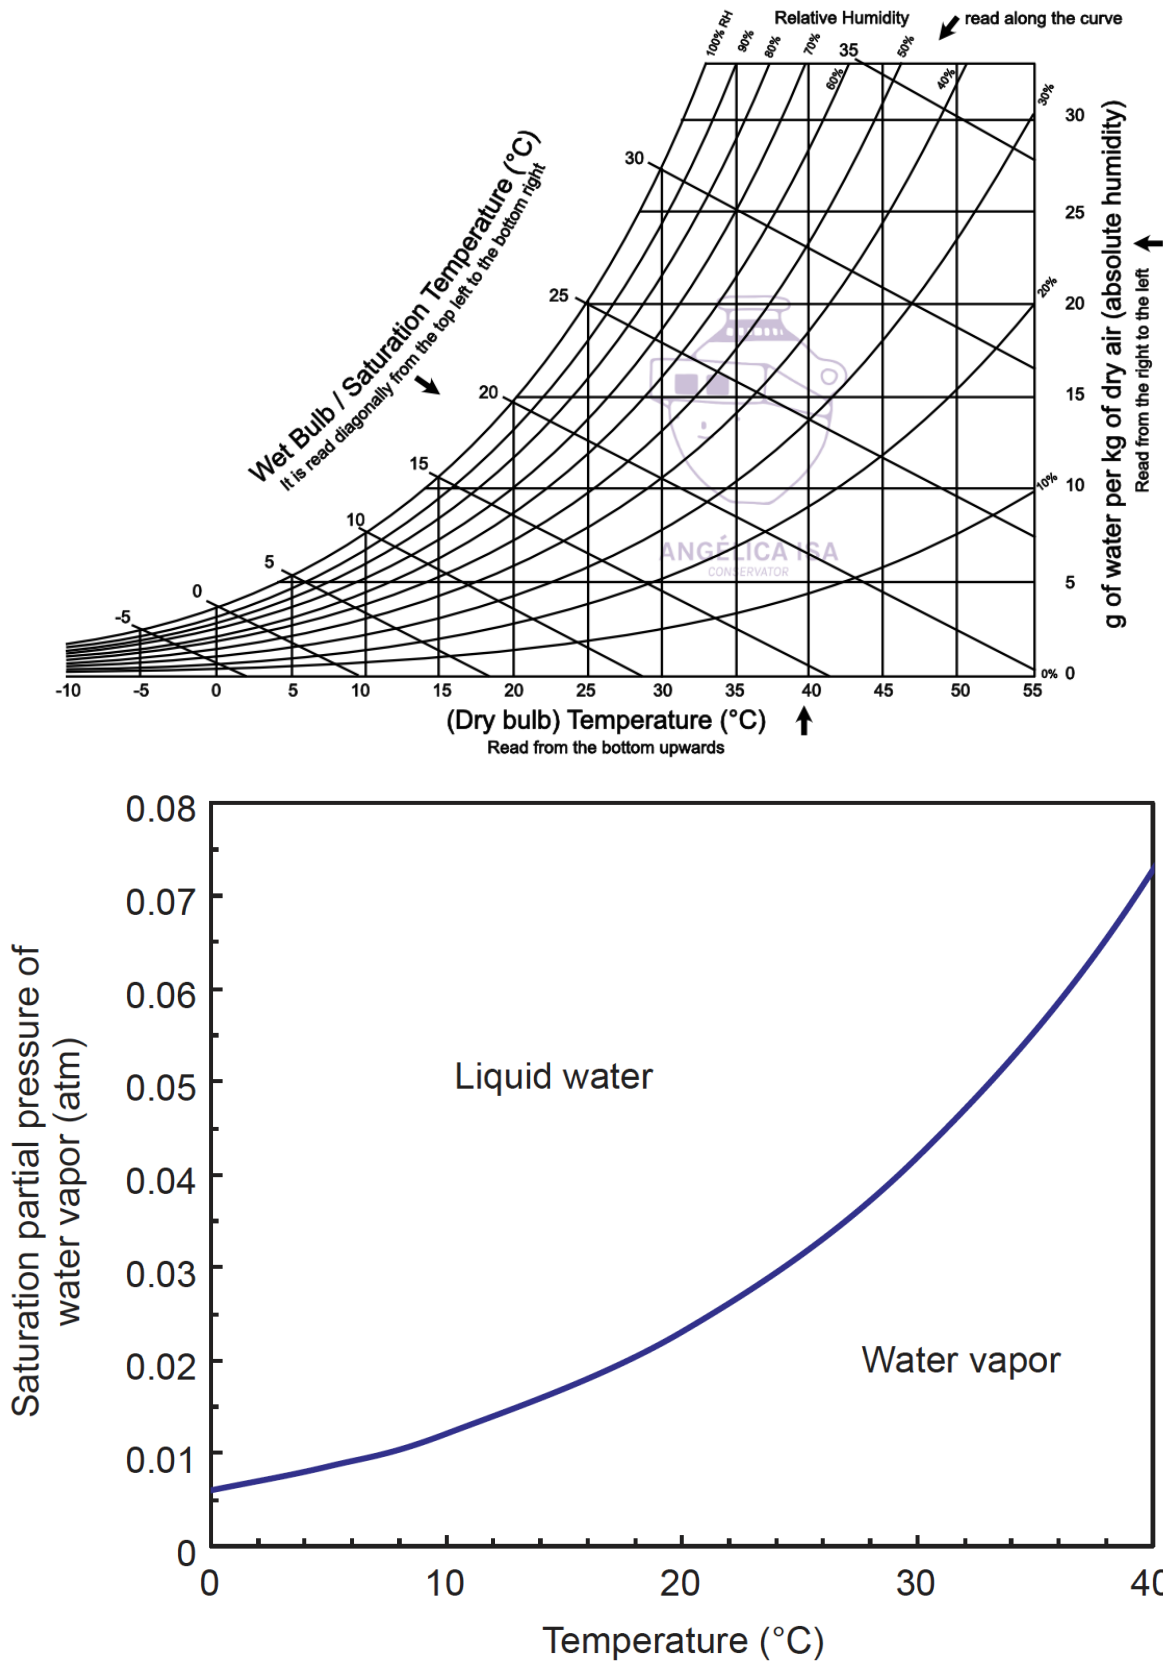


Figure 8.1: **Top:** Psychrometric chart for water at standard pressure conditions 1 atm = 101 kPa (from angelicaisa.com). **Bottom:** Phase transition coexistence curve for water near the triple point (from Mathez & Smerdon).

Record your observations here and give an explanation for what is occurring.

If you examine the full phase diagram from last week, you see that the coexistence curve between liquid water and solid water is basically vertical, meaning it has the same transition temperature regardless of the pressure value. Try to observe this **frost point** by cooling your water further (this can be accomplished by adding salt to the water, as “freezing point depression” lowers the transition temperature within your beaker). Record any observations and temperature measurements.

8.2.2 Drying your hands

You are familiar with washing your hands and letting them dry off. Let’s try to quantify that experience, slightly. Measure the temperature of “cold” water from the tap. Then run your hands under the water for a few seconds. Turn off the water and shake off your hands five times to remove large water droplets. Now wave your hands back and forth in the air in a regular motion while your partner times you with a stopwatch. Stop the timer when your palms are dry, as determined by your partner. Repeat the whole experiment with “hot” water from the tap. Record your temperatures, times, and observations here.

8.2.3 An alcohol upside-down cloud

Particle physicists use “cloud chambers” to observe the paths of particles in nuclear reactions (break up of atoms into smaller atoms by fission) and particle collision experiments. We will build such a chamber using isopropyl alcohol (isopropanol). The reason for using alcohol for such an experiment is because it actually *does not* make clouds easily, i.e., it does not nucleate as easily as other substances. A **cloud** is actually not composed of vapor, but is instead small liquid or ice droplets that have formed when vapor condenses. So, in the cloud chambers we will build (and that particle physicists use) the air is *super saturated* with alcohol and makes a “cloud” (the trail of tiny liquid particles) only when driven to nucleation by the ionization of air/alcohol by the passing particle.

Procedure:

- Construct your cloud chamber by doing the following: (1) Fold the piece of felt in half and cutting it so that the folded piece matches the size of the cubical box. (2) Attach the felt to the base of the box using magnets. (3) Cover the bottom (out) side of the baking pan with black acrylic (4) Soak the felt with alcohol; it should be wet, but if there is excess liquid in your box you should pour that out. (5) Place the radioactive rock at the center of your upside-down baking sheet (your instructor will bring it over using gloves). (6) Place the box upside-down on the baking sheet and caulk around the edges to seal it. (7) Obtain (your instructor will bring) a chunk of dry ice; place it on the corkboard mat; place the baking sheet box on top of the dry ice.
- The clouds are best observed in a mostly dark space, using a flashlight. Look for “streams” of cloud emerging from the radioactive rock

Draw your setup and describe your observations.

8.2.4 Clouds

Now we will build clouds made of water vapor. The reason the alcohol clouds were “upside down” (the alcohol was placed on the ceiling, the clouds formed down at the cold bottom layer) was because alcohol vapor is *more dense* than air and therefore sinks. Water vapor is *less dense* than water. So, in our environment outside, water evaporates off of lakes and oceans and then rises upwards. When the temperature drops sufficiently, the water vapor (invisible) becomes liquid or ice droplets and makes a visible cloud. So, in this experiment, we will have a jar with (warm) water at the base and a “roof” that is cooled a bit below 0°C.