Product Specification

AUO Display Plus Corporation

( ) Preliminary Specifications
(■) Final Specifications

Module	**17 inch x 14 inch TFT plate for X-ray sensor**
Model Name	**R1714AS08.0 (92D17149.0R0)**

Customer	**Date**	**Approved by**	**Date**
		Michelle Liau	2023/10/16
Checked & Approved by	**Date**	**Prepared by**	**Date**
		Gina Huang	2023/09/11
Customer's sign back page		General Display Business Division / AUO Display Plus Corporation	

AUO Display Plus Confidential For H&byz Internal Use Only

Contents

1. Operating Precautions 4
1.1 Electrostatic Discharge Control 4
1.2 Storage 4
1.3 Usage 4
2. General Description 5
2.1 General Specification 5
2.2 Mechanical Specification 6
2.3 Electrical Specification 7
3. Mechanical Characteristics 11
4. Pin Out The design of sensor pin assignment is compatible for WOA and non-WOA applications 12
4.1 Reader 13
4.2 Driver 13
4.3 FPC 15
5. Reliability Test Criteria 15
6. Label and Packaging 16
6.1 Shipping Label 16
7.2 Carton Package 17
7.3 Palletizing sequence 18

AUO Display Plus Confidential For H&abyz Internal Use Only

Record of Revision

Version	Date (yyyy/m/d)	Page	Old description	New Description
0.1	2023/09/11	All	First draft specification	

AUO Display Plus Confidential For H&abyz Internal Use Only

1. Operating Precautions

1.1 Electrostatic Discharge Control

1) Remember to avoid ESD (Electro Static Discharge) damage and chemical damage.
2) Static electricity will damage Sensors; please do not touch the Sensor without any grounded device and always keep static electricity under 1KV when handing or assemblage.
3) Management Method of Ionizer: Decay time: < 1KV within 5 sec & balance: +/-100V or less.
4) Make sure of operator wearing Wrist Strap during any Sensor handling process for ESD protection.
5) Less EMI: it will be more safety and less noise.

1.2 Storage

1) All Sensors should be well packed and be stored in a certain moisture and temperature environment.
2) Keep away from water, dust and fire.
3) Keep TFT sensor in dark environment without using or it might have the residual image of light or cause abnormal image when using.

1.3 Usage

1) Please operate Sensor with the correct test voltage/Current/Light source in suitable temperature to avoid any abnormal damage on it. Be sure to turn off the power when connecting or disconnecting the circuit.
2) Do not apply the invalid signal, otherwise, it will cause improper shut down and damage the Sensor.
3) Sudden temperature changes cause condensation. High temperature and humidity may degrade Sensors' performance. Please do not expose the Sensors to the direct powerful light sources, keep away from water/dust/fire, and store them in dark environment.
4) There is no strong vibration or shock or any unsuitable external force in all procedures of buy's sites because it may cause Sensors broken and count to buyer's responsibility.
5) When the panel surface or backside is stained, clean it with air-gun blowing or soft dust-free wiper carefully, please be cautious and do not scratch it.
6) To Take out Sensor from the box should be friendly to avoid damaging the circuit on the sensor. Please avoid the pressure adding to the surface of Sensors
7) Operator is forbidden to use hands to touch the Front side of Sensor. The front Film of Sensor scratches easily, please handle it carefully. Acetic acid or chlorine compounds are not friends with Sensors.
8) In case if a sensor has to be put back into the packing tray after once it was taken out from the container, press at the far ends of the sensor edge softly. Otherwise the TFT sensor may be damaged.
9) There might be a danger to be injured by its fragments when it is broken, please do not touch it by a bare hand.

AUO Display Plus Confidential For H&abyz Internal Use Only

2. General Description

This specification applies to the sensor array panel for X-ray sensor R1714AS08.0

2.1 General Specification

ITEMS	Unit	SPECIFICATIONS
Technology		a-Si TFT/PIN diode
Panel size	mm	443.00 (G) x 364.92 (D)
Pixel pitch	um	140
Active area (H x V)	mm	430.08 (G) x 350 (D)
Number of pixels		3072 (Gate) x 2500 (Data)

AUO Display Plus Confidential For H&abyz Internal Use Only

2.2 Mechanical Specification

Category	ITEMS	Unit	SPECIFICATIONS
Dimension	Panel dimension	mm	443 (G) x 364.92 (D), tolerance: ±0.2
	Glass substrate	mm	0.7
	Active area dimension	mm	430.08 (G) x 350 (D)
	Edge chamfering	mm	0.2±0.1
	Corner cutting	mm	1.5±0.3
	Distance：plate edge – pixel area	mm	Gate pad side: 6.56
		mm	Data pad side: 4.96
		mm	Gate pad opposite side: 6.96
		mm	Data pad opposite side: 5.36
Gate PAD	Pad length	um	1000
	Pad width	um	40
	Pad pitch	um	72
	Number of pad blocks	piece	6
	Number of pads per		562
	Pad block pitch	mm	71.68
	Material		ITO at the top layer
Data PAD	Pad length	um	2200
	Pad width	um	54
	Pad pitch	um	100
	Number of pad blocks	piece	10
	Number of pads per		270
	Pad block pitch	mm	35.84
	Material		ITO at the top layer
FPC PAD	Pad length	um	1000
	Pad width	um	160
	Pad pitch	um	200
	Number of pad blocks	piece	1
	Number of pads per		96
	Pad block pitch	mm	NA
	Material		ITO at the top layer

AUO Display Plus Confidential For H&abyz Internal Use Only

2.3 Electrical Specification

MODEL				STD REVISED	Note
Project Name				R1714AS08.0	
TFT Panel	PIN or not			PIN with	
	Pixel pitch		um	140	
	Panel size		mm	443 (G) x 364.92 (D)	
	Fill factor (Typ.)		%	65	
	Glass thickness		mm	0.7	
	Number of pixel	gate		3072	
		read out		2500	
	Number of active pixel	gate		3072	
		read out		2500	
TFT	Ron (Typ.)		M ohm	2.2	
			✧ TEG (Avg. of whole testkey) Ron Vds=0.1V, Vg=15V ✧ Sampling item, ratio 1/40		
	TFT Leakage (Max.)		fA/pixel	80	3
PIN	Pixel capacitance (Typ.)	in case of i=1.0um (pF)	pF	1.48	
	Pixel Leakage (Max.)		fA/pixel	3	1.
	Lag: 1st Frame		%	3	2.
Gate line	Resistance (Typ.)		K ohm	5.3	
	Capacitance (Typ.)		pF	121.57	
Data line	Resistance (Typ.)		K ohm	2.4	
	Capacitance (Typ.)		pF	105.9	
Bias line	Resistance (Typ.)		K ohm	3.41	

AUO Display Plus Confidential For Hiabyz Internal Use Only

Note1. Definition of Pixel leakage

The value of pixel leakage is to illustrate the pixel dark performance in the sensor array.

- Clean all residual charges in pixels
- Hold in dark environment for 10sec and then capture the image
- Clean all residual charges in pixels, hold in dark environment for 70secs and then capture the image again
- The variation of pixel counts between two holding time is defined as the pixel leakage and can be calculated by the following formula.

$$I = (CNT_{70} - CNT_{10}) \times (e^{-}/LSB) \times 1.6 \times 10^{-19}/\Delta T$$

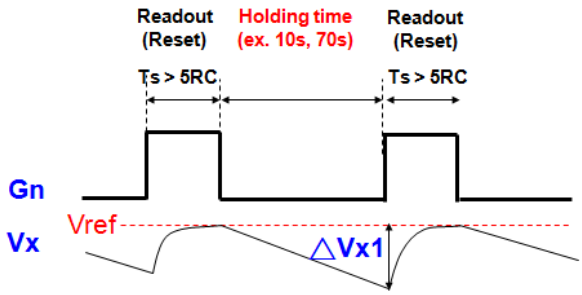

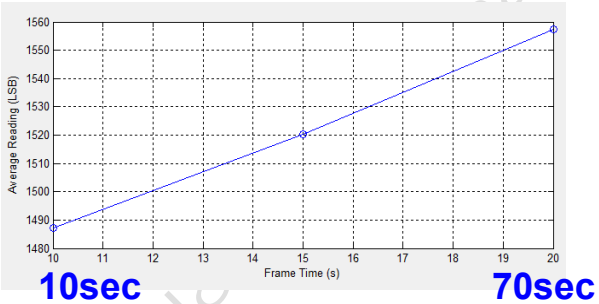

AUO Display Plus Confidential For Internal Use Only

Note2. Definition of Lag

Lag is a residual signal present in image frames subsequent to the frame in which the residual signal was generated.

- Several dark images are acquired until the pixel counts are stable in the dark environment.
- TFT plate is exposed by green light.
- The light image after light exposure is called zero frame (F_0).
- After zero frame, ten dark images (F_1~F_{10}) are acquired continuously by AUO's testing system.
- The lag of each frame is calculated by the formula as below.

$$Lag = \{[Median(F_n) - Offset]/[Median(F_0) - Offset]\} \times 100\%$$

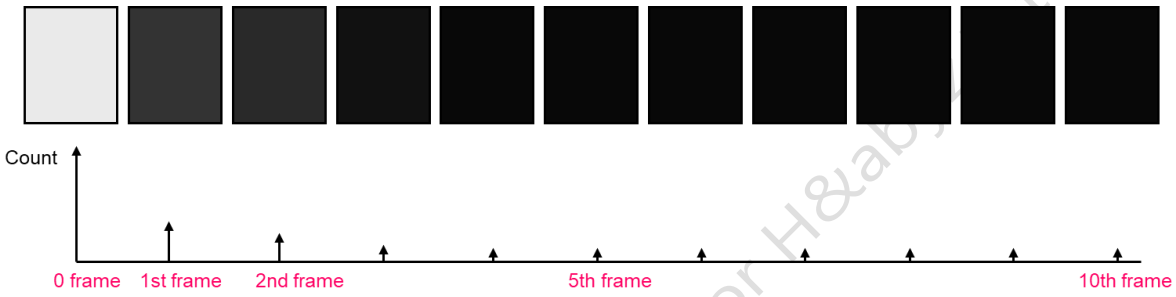

AUO Display Plus Confidential For H&ab External Use Only

Note3. Definition of TFT Leakage

The value of TFT leakage is to illustrate the TFT light performance in the sensor array.

- Several dark images are acquired until the pixel counts are stable in the dark environment.
- Set IFS (Integrator fill-scale selection) of AD71124: IDS = 63 (decimal value)
- TFT plate is exposed by strong green light with 10 sec duration and capture light images as Lightimage_10sec.
- Several dark images are acquired until the pixel counts are stable in the dark environment.
- TFT plate is exposed by strong green light with 20 sec duration and capture light image as Lightimage_20sec.
- Subtract two image using (Lightimage_10sec – Lightimage_20sec).
- Calculate Median value of (Lightimage_10sec – Lightimage_20sec) as (CNT10 – CNT20).
- The variation of pixel counts between two holding time is defined as the TFT leakage and can be calculated by the following formula.

$$I = (CNT_{10} - CNT_{20}) \times (e^{-} / LSB) \times 1.6 \times 10^{-19} / \Delta T$$

AUO Display Plus Confidential For H&abyz Internal Use Only

3. Mechanical Characteristics

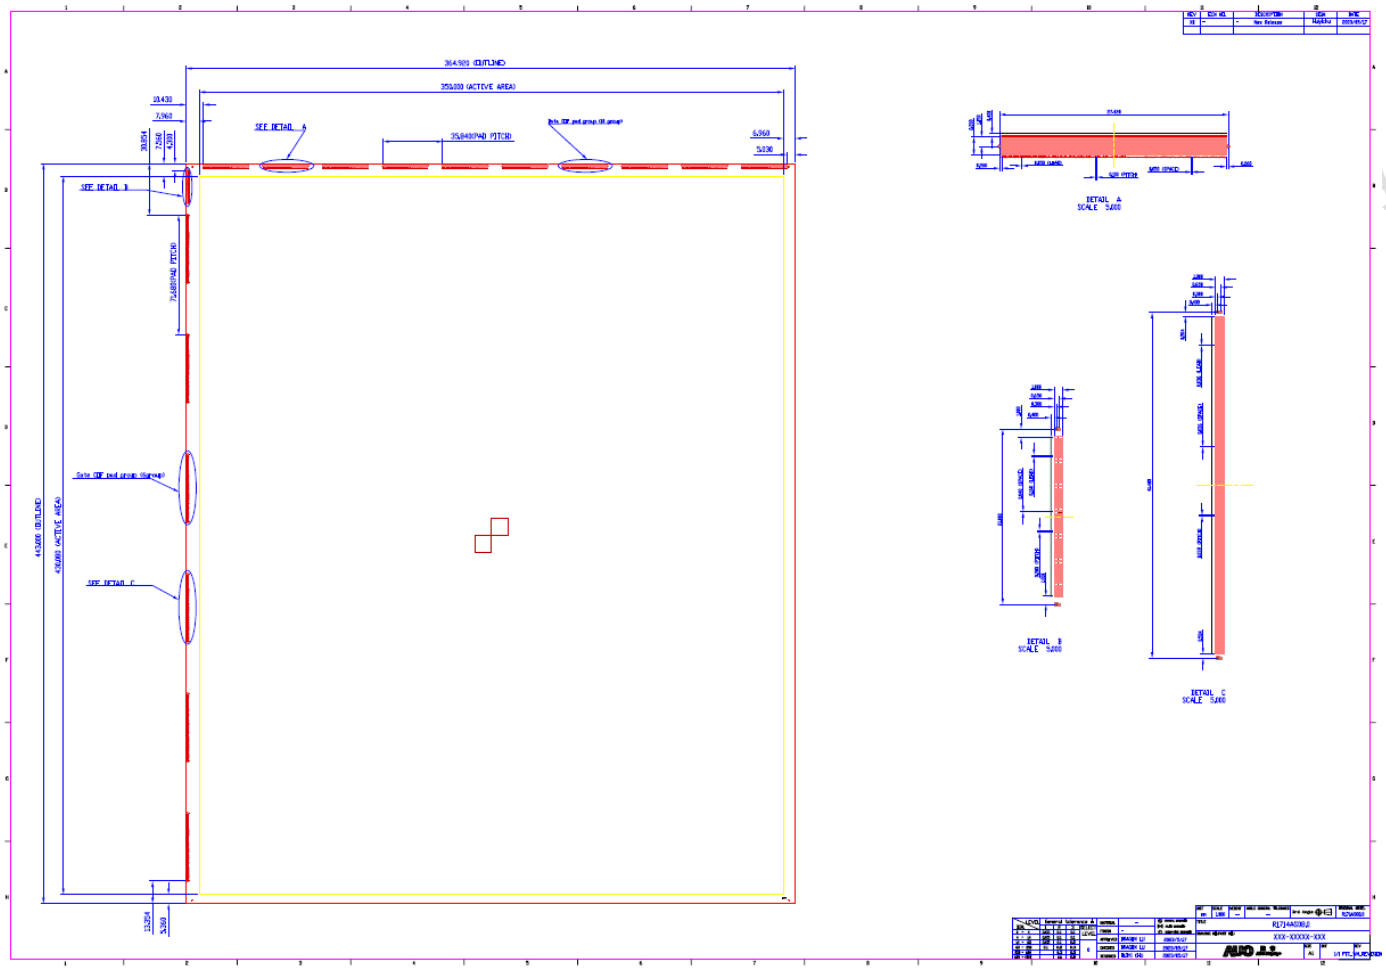

AUO Display Plus Confiden

4. Pin Out

The design of sensor pin assignment is compatible for WOA and non-WOA applications.

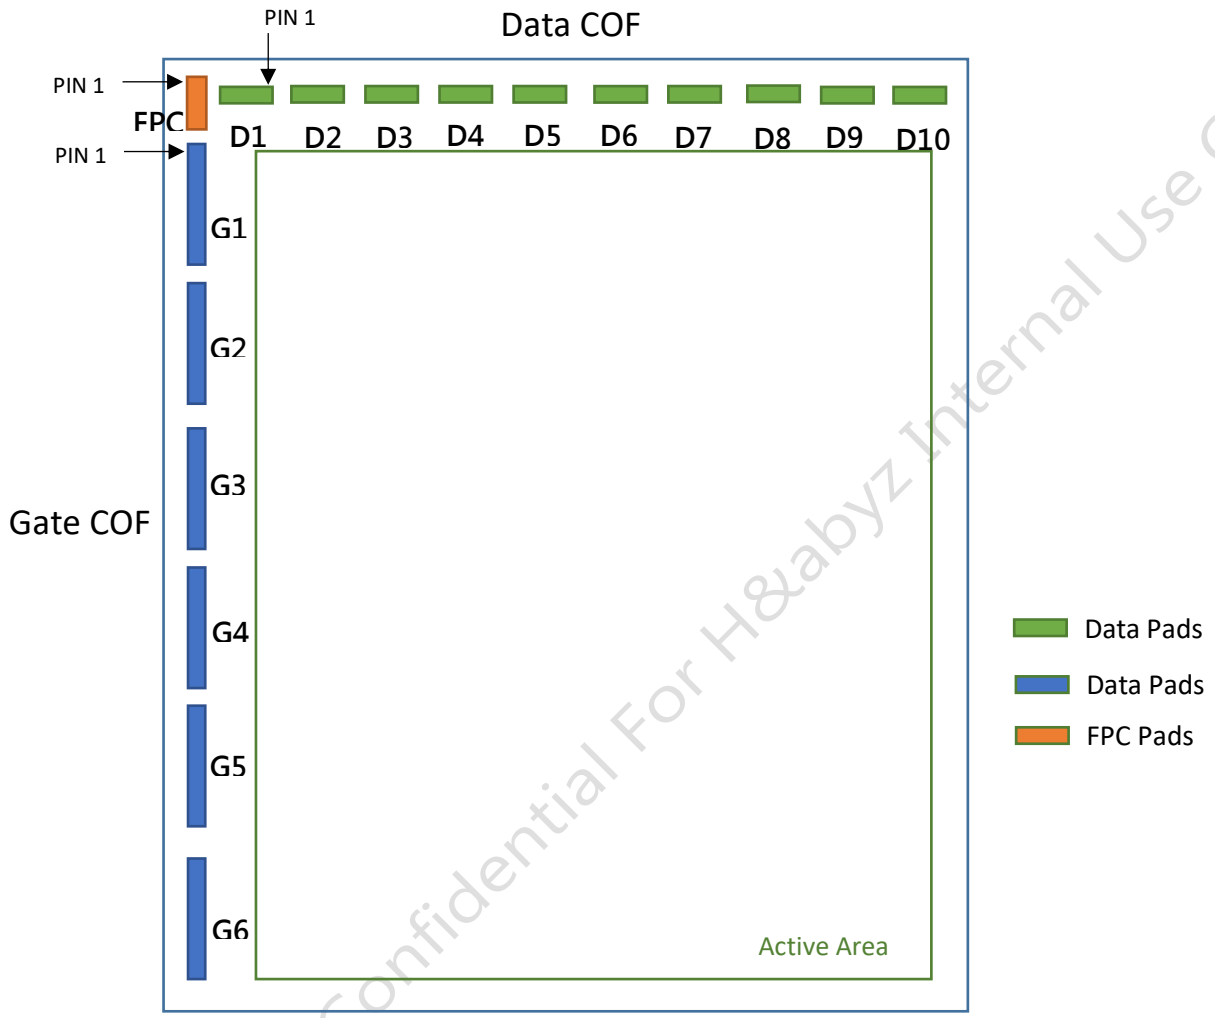

AUO Display Plus Confidential For H&abyz Internal Use Only

4.1 Reader

Data COF #1~ #9 pin assignment	
Pin No.	**Assignment**
1~5	Vcom
6	Dummy
7	Dummy
8~263	Connect to pixel array
264	Dummy
265	Dummy
266~270	Vcom

Data COF #10 pin assignment	
Pin No.	**Assignment**
1~5	Vcom
6	Dummy
7	Dummy
8~67	Data Dummy Lines
68~263	Connect to pixel array
264	Dummy
265	Dummy
266~270	Vcom

4.2 Driver

Pin No.	Assignment
1	ATST
2	ATST
3	R_STV1 (VSRO)
4	LR
5	OE2_R
6	OE1_R
7	CPV_R
8	STV1_R
9	CHIP_SEL_1_R
10	CHIP_SEL_2_R
11	GND
12	GND

AUO Confidential For H&abyz Internal Use Only

13	DUMMY
14	VCC
15	VCC
16	DUMMY
17	VGG
18	VGG
19	VGG
20	DUMMY
21~23	VGL
24~25	Dummy
26~537	Gate Lines
538~539	Dummy
540~542	VGL
543	DUMMY
544	VGG
545	VGG
546	VGG
547	DUMMY
548	VCC
549	VCC
550	DUMMY
551	GND
552	GND
553	CHIP_SEL_2_L
554	CHIP_SEL_1_L
555	STV1_L
556	CPV_L
557	OE1_L
558	OE2_L
559	LR
560	R_STV1 (VSRO)
561	ATST
562	ATST

H&abyz Internal Use Only

4.3 FPC

Pin No.	Assignment
1~70	DUMMY
71	VEE
72	VEE
73	DUMMY
74	DUMMY
75	VGG
76	VGG
77	DUMMY
78	DUMMY
79	VCC
80	VCC
81	DUMMY
82	DUMMY
83	GND
84	GND
85	DUMMY
86	DUMMY
87	CHIP_SEL_2
88	CHIP_SEL_1
89	STV1_L
90	CPV
91	OE1
92	OE2
93	LR
94	R_STV1
95	DUMMY
96	DUMMY

5. Reliability Test Criteria

High Temperature High Humidity (HTHH) storage test		Unit	Remark
Temperature	85	degree C	
humidity	85	%RH	
Time	300	h	
Thermal Shock			Remark
-20℃/30 min ,60℃ 30min 100 cycles			

AUO Display Plus Confidential For H&abyz Internal Use Only

6. Label and Packaging

6.1 Shipping Label

[Label on Black Tray]

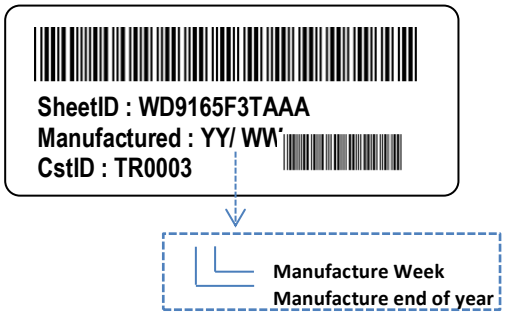

[Label on AL bag]

[Label on Carton]

AUO Display Plus Confidential - For Internal Use Only

7.2 Carton Package

(1) Pick up PP board

(2) Place bottom tray on PP board



(3) Place EPE spacer on tray



(4) Place X-Ray on EPE spacer, sensor facing up

(5) Place Top tray, and notice location

(6) Stack tray in order, total 5pcs X-ray panel, 5 trays

(7) Fix with creped tape

(8) Place whole stack into ANTI-STATIC bag, plus 2 DESICCANT, then tape the bag

(9) Place ANTI-STATIC bag into AL bag and vacuum it

(10) Put the Al bag into carton

(11) Make sure smooth of Carton

AUO Use Only

7.3 Palletizing sequence

- **Pallet size: 1320mm*660mm*140mm**

(1) Fully stacked

Place cartons between the bottom cardboard on metal pallet. Make sure the cartons don't extend beyond the pallet.

(2) Not fully stacked (One layer total carton numbers>2/3) If not fully stacked, fill with empty cartons until current layer is full then ship as partial pallets.(One layer packing don't use bottom cardboard.)

(3) Not fully stacked (One layer total carton numbers<2/3).

If not fully stacked one layer, must stack to new pallet to place carton one or two rows, use corner pillar and band to fix on pallet, also can refer to method(2).

- **Pallet illustration**

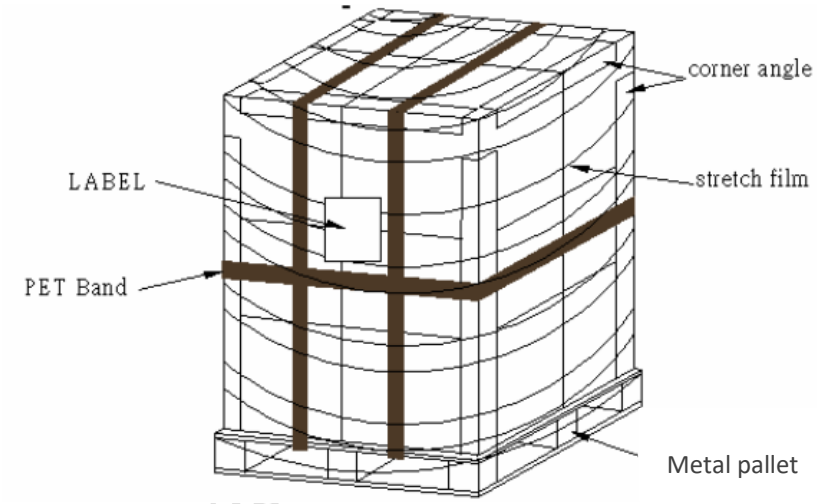

AUO Display Plus Confi
ternal Use Only