Receive-time gain compensation

Full 3-21 m scene | Gain referenced to 3 m | Applied maximum 35.37 dB | Before I/Q filtering

A. Positive real gain increases with receive time

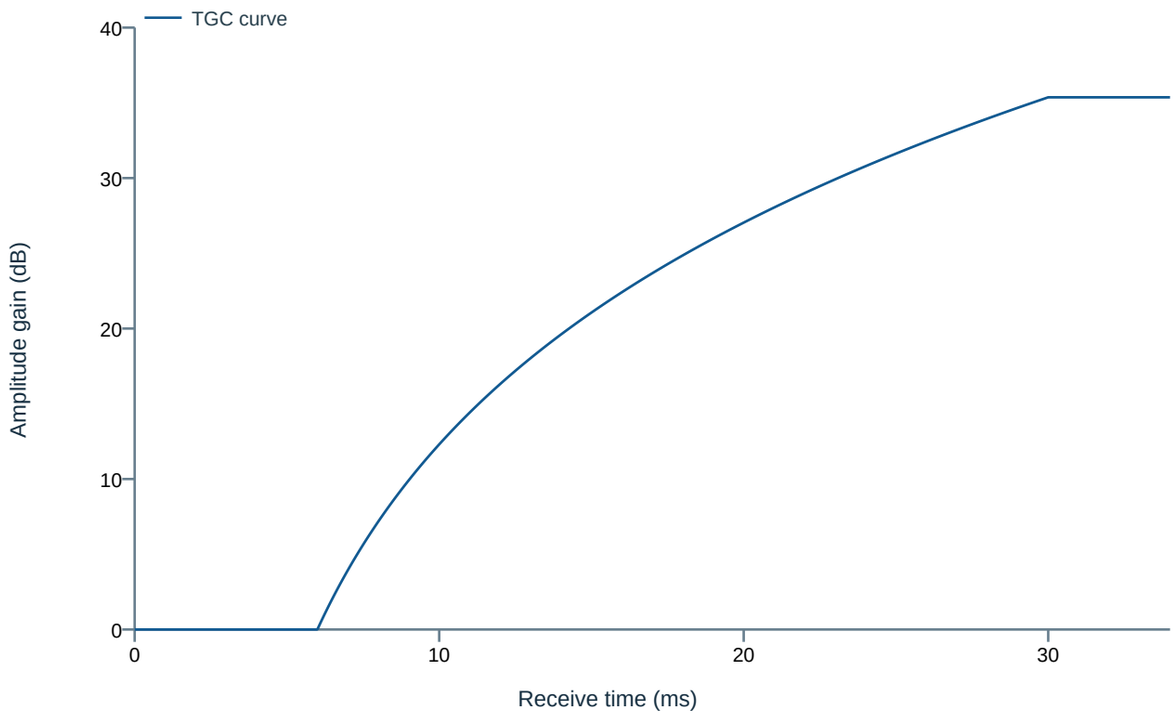

B. Clean echo: 0.1 ms RMS

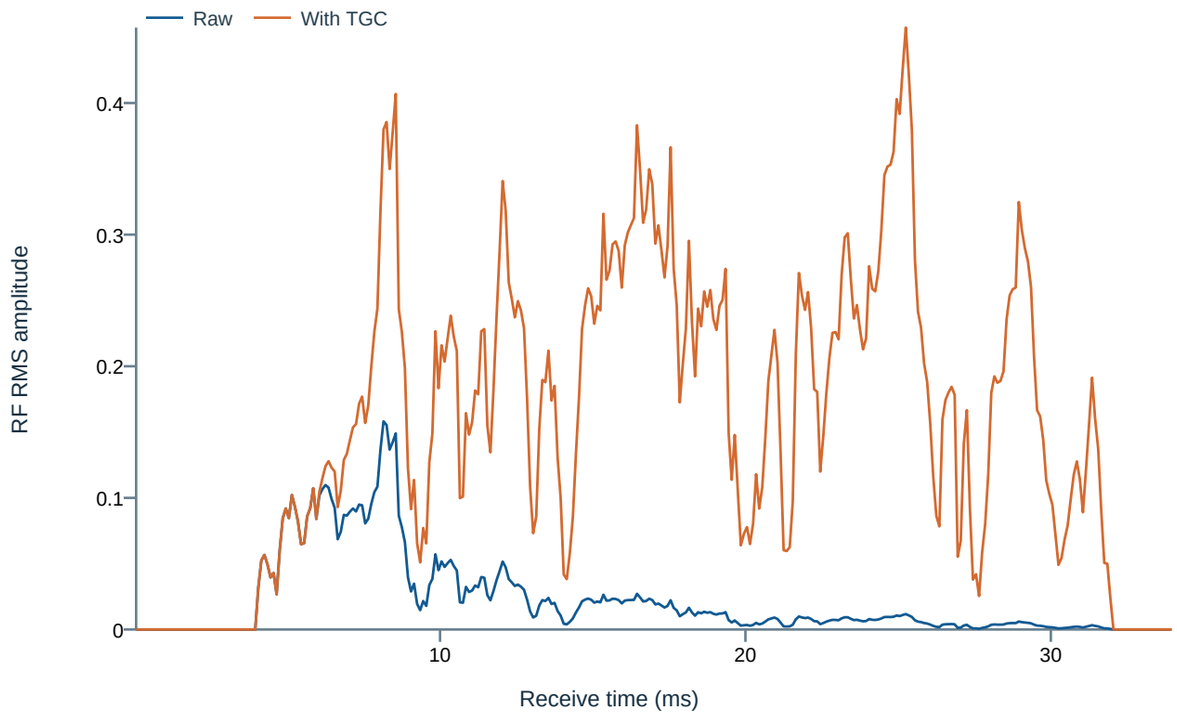

C. Full noisy received record: 0.1 ms RMS

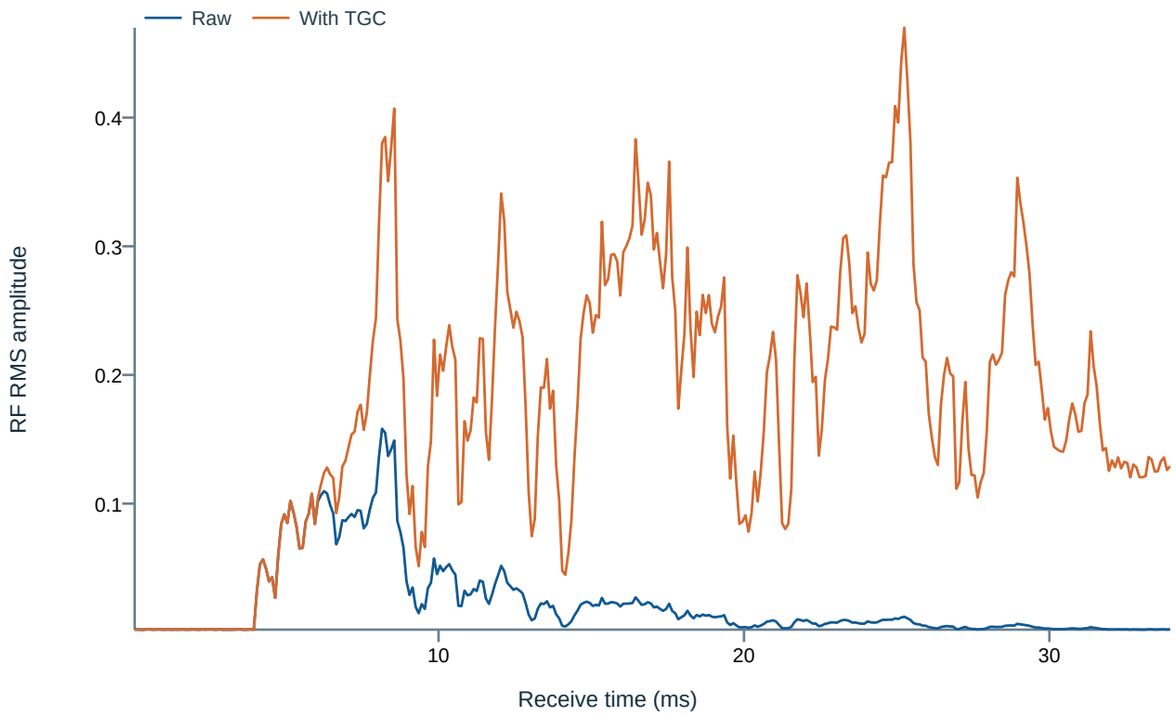

D. Later receiver noise is amplified too

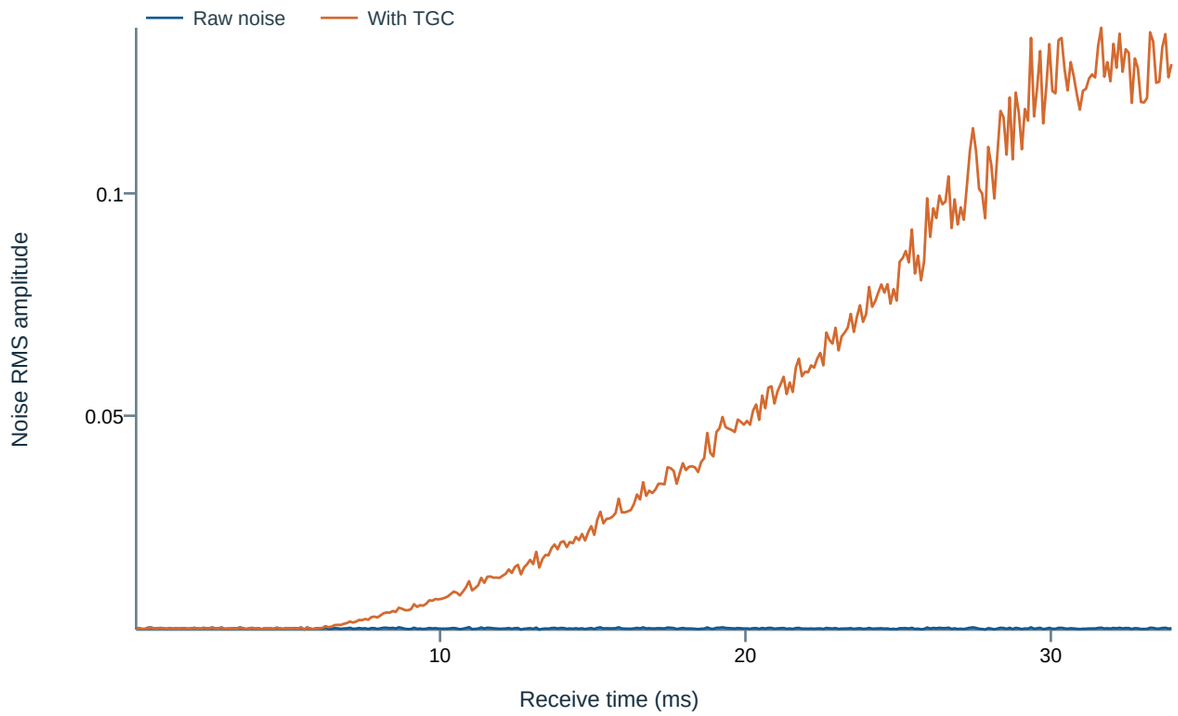

Narrowband teaching simulation | Positive radial velocity = away | Offline FIR delay compensated