


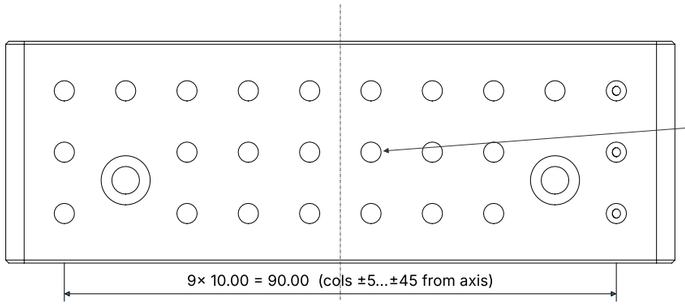


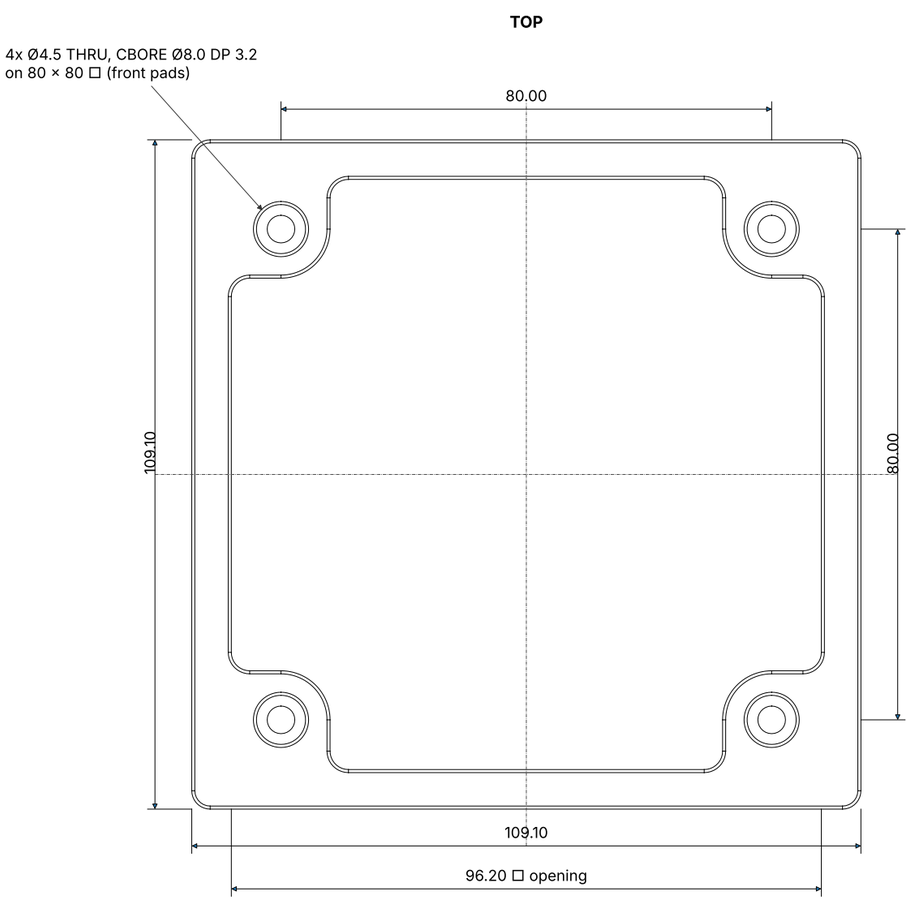

FRONT (lens side)

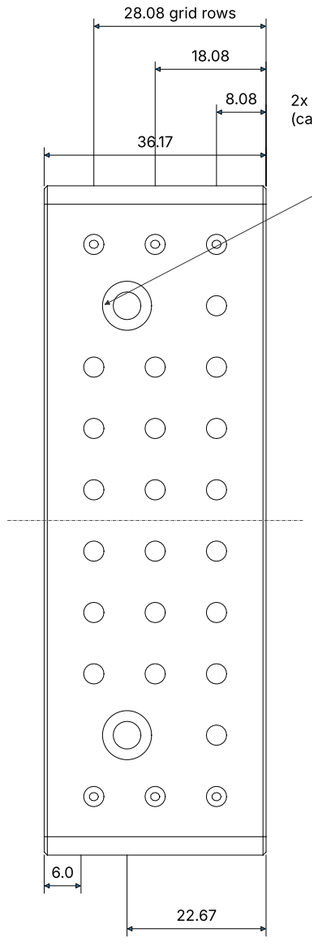

RIGHT (+Y side)

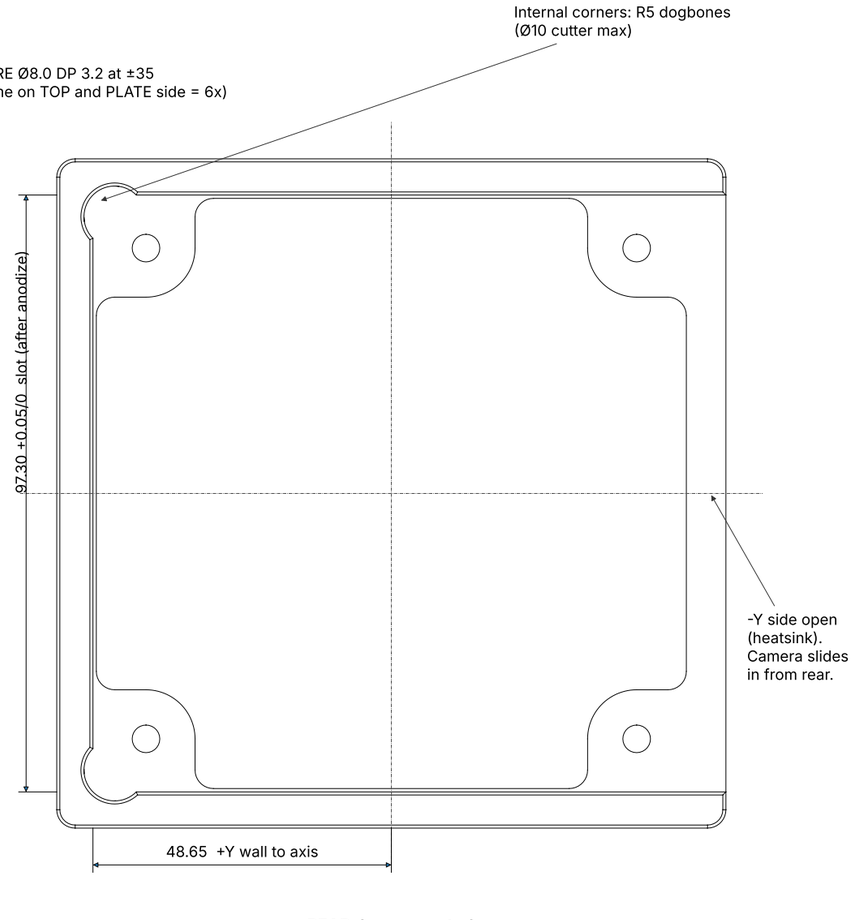

REAR (camera entry)

NOTES

1. Material 6061-T6 aluminium. General tolerance ISO 2768-mK unless noted.
2. Break all sharp edges 0.5 × 45° (modelled). Outer vertical corners R3.
3. Anodize Type II, dark grey, after machining. Mask or chase all tapped holes after anodize.
4. Toleranced fits apply AFTER anodize.
5. Counterbores sized for DIN 7984 M4 low-head (Ø7 × 2.8) unless noted.
6. M4 tapped grid: Ø3.3 drill, 3.9 full-Ø depth (118° tip), thread M4×0.7 min 3.4 deep. Bottoming tap or thread mill.
7. Reference model: STEP file of same name/rev is master for all undimensioned geometry.
8. Camera housing 97.0 nominal (Teledyne 03-129-20213-02). Check slot on the real camera before anodize.
9. Camera front face seats on inside of front ring (z datum): flat ≤0.02. Front pads: R8 concentric to cbores, R3 junctions.

PART	**LINEA-CAGE R22**
TITLE	**Camera cage, one-piece**
MATERIAL	6061-T6
FINISH	Anodize Type II dark grey
MASS	194 g
SCALE	1:1 UNITS mm THIRD-ANGLE PROJECTION
REV / DATE	R22 2026-11-11
PROJECT	Xylosome — Linea HS 16k rig (H. van Hoytema)