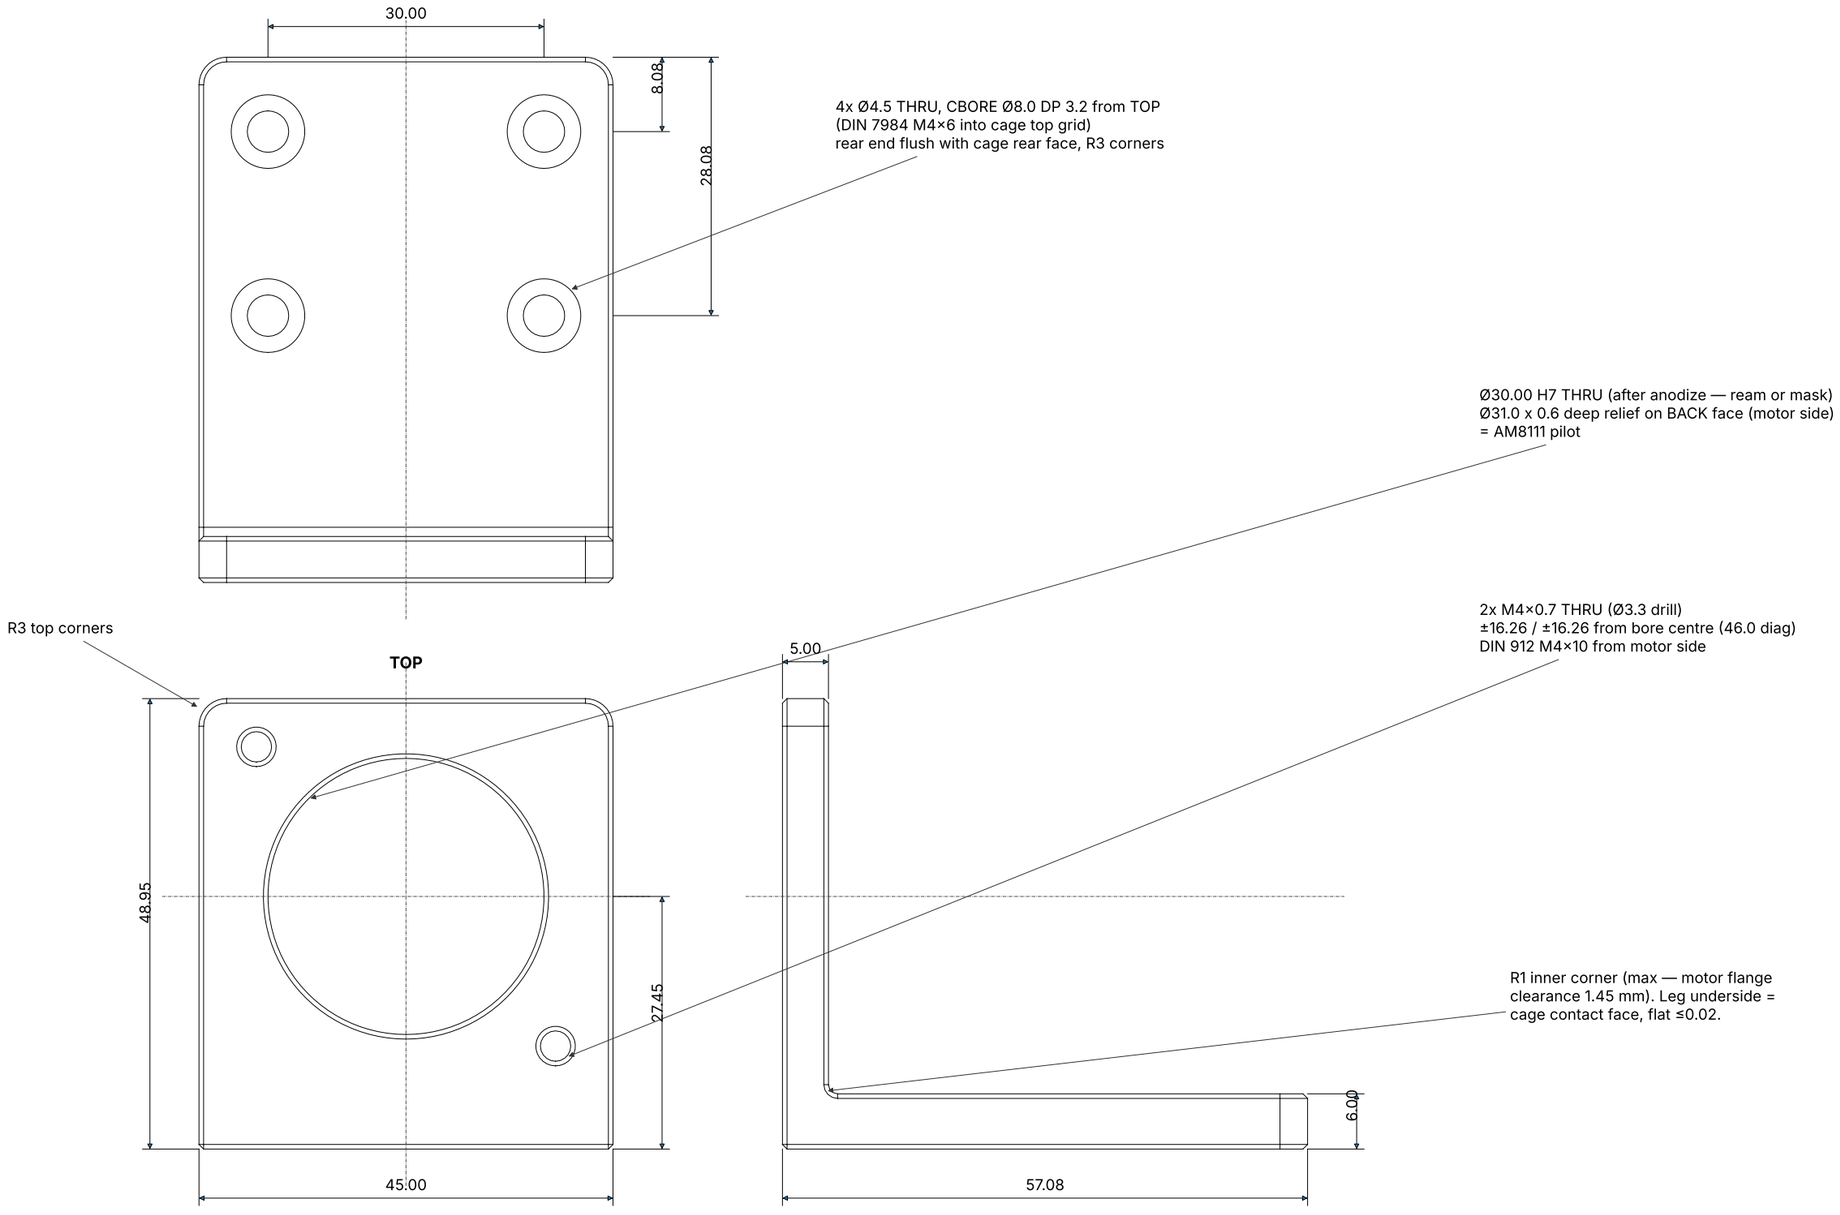


NOTES

1. Material 6061-T6 aluminium. General tolerance ISO 2768-mK unless noted.
2. Break all sharp edges 0.5 × 45° (modelled). Outer vertical corners R3.
3. Anodize Type II, dark grey, after machining. Mask or chase all tapped holes after anodize.
4. Toleranced fits apply AFTER anodize.
5. Counterbores sized for DIN 7984 M4 low-head (Ø7 × 2.8) unless noted.
6. Bore Ø30 H7 perpendicular to back face within 0.02 (motor pilot); back face flat ≤0.02.
7. Motor axis sits 82.0 above optical axis when mounted (27.45 above leg underside).
8. Reference model: STEP file of same name/rev is master for all undimensioned geometry.

PART	**LINEA-MOTORBRKT R7**
TITLE	**Motor L-bracket, Beckhoff AM8111**
MATERIAL	6061-T6
FINISH	Anodize Type II dark grey
MASS	55 g
SCALE	1.5:1 UNITS mm THIRD-ANGLE PROJECTION
REV / DATE	R7 2026-11-11
PROJECT	Xylosome — Linea HS 16k rig (H. van Hoytema)