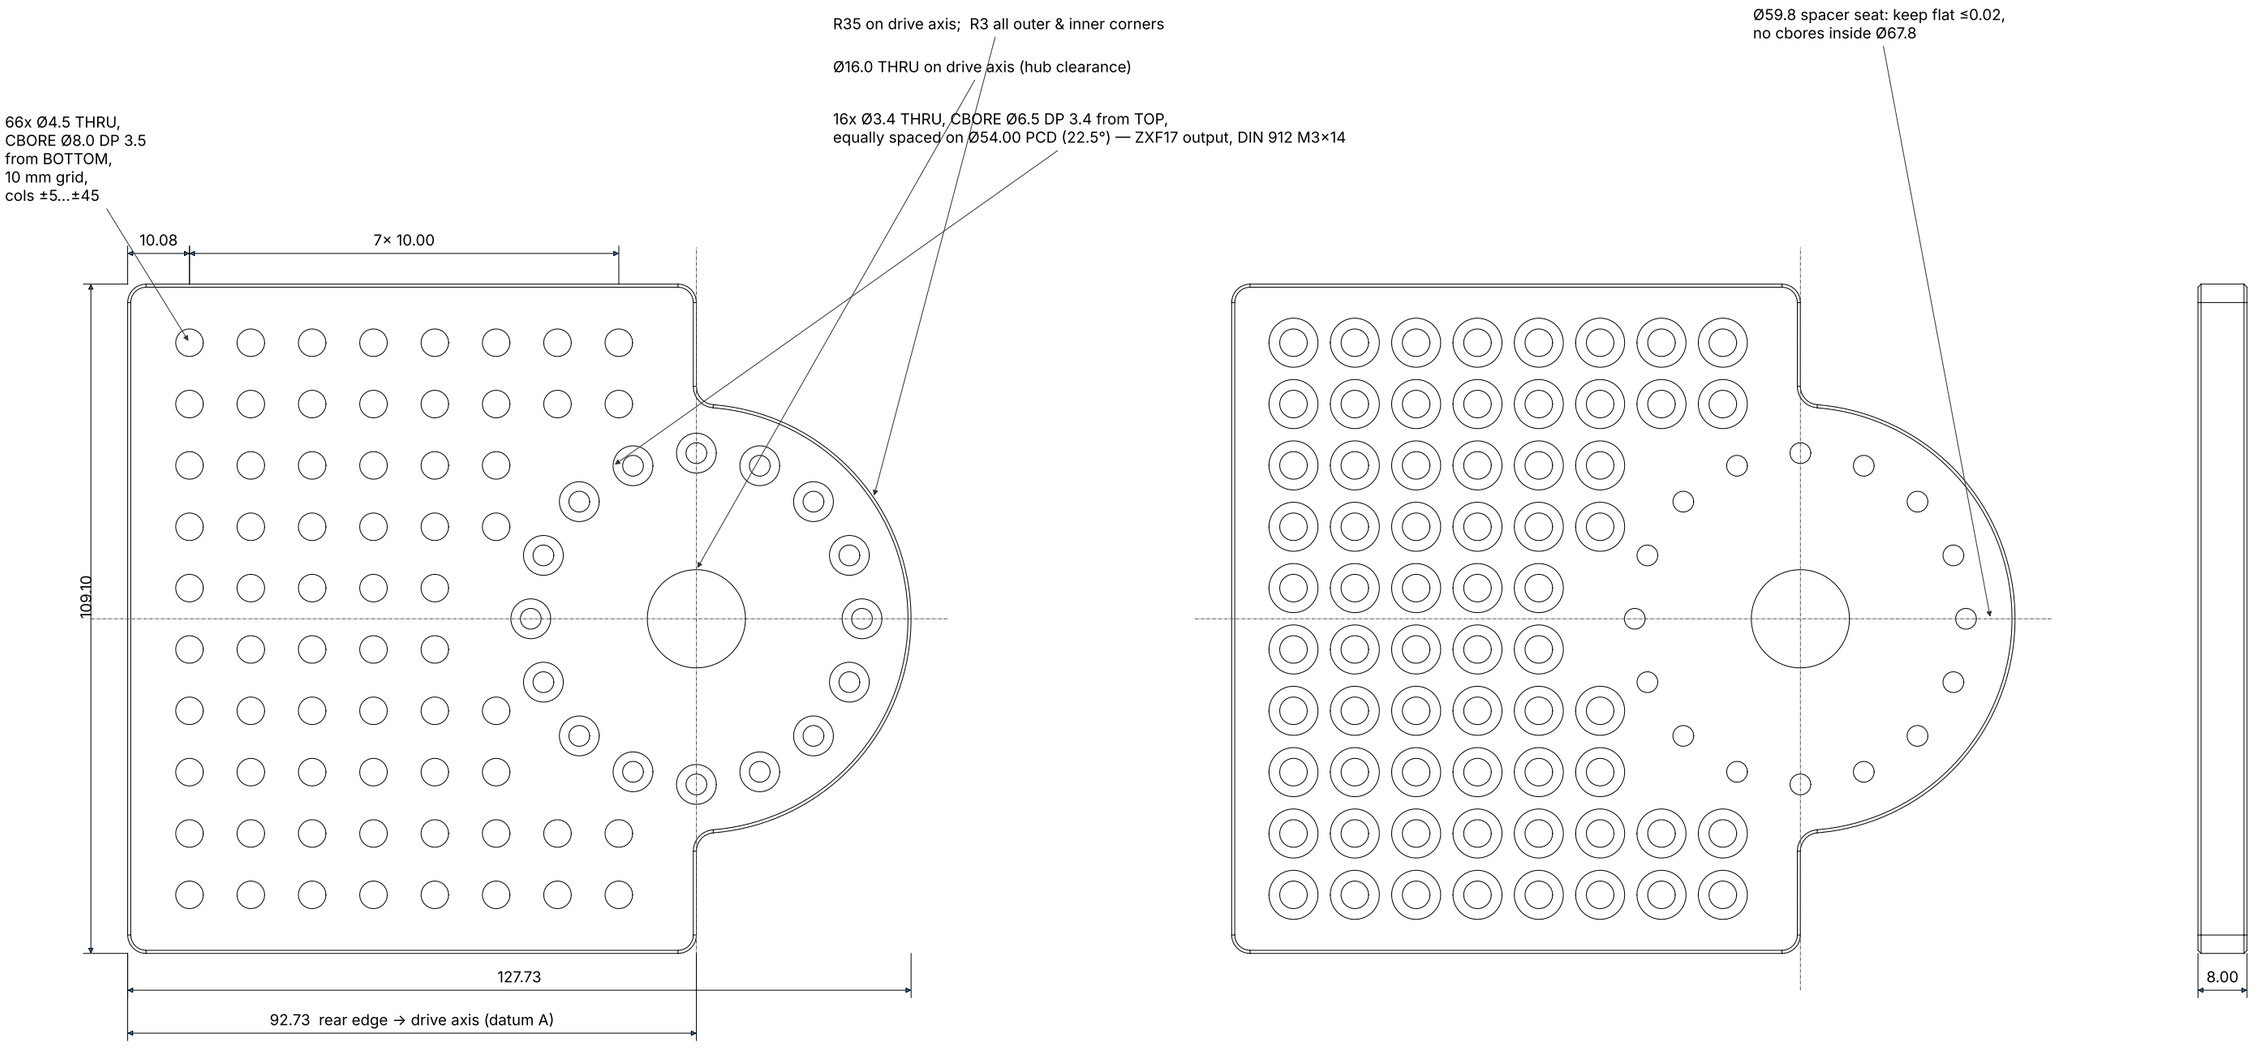


TOP (cage side) **BOTTOM (drive side)** **REAR EDGE**

NOTES

1. Material 6061-T6 aluminium. General tolerance ISO 2768-mK unless noted.
2. Break all sharp edges 0.5 × 45° (modelled). Outer vertical corners R3.
3. Anodize Type II, dark grey, after machining. Mask or chase all tapped holes after anodize.
4. Toleranced fits apply AFTER anodize.
5. Counterbores sized for DIN 7984 M4 low-head (Ø7 × 2.8) unless noted.
6. Datum A = drive axis (Ø16 hole centre). Grid and PCD positions from A and centre plane.
7. Plate locates on the drive by screws only (±0.2). Optional: Ø60 H7 × 1.0 pilot pocket on bottom for exact centring.
8. Reference model: STEP file of same name/rev is master for all undimensioned geometry.

PART	**LINEA-PLATE R9**
TITLE	**Cheese plate / drive adapter**
MATERIAL	6061-T6
FINISH	Anodize Type II dark grey
MASS	205 g
SCALE	1:1 UNITS mm THIRD-ANGLE PROJECTION
REV / DATE	R9 2026-11-11
PROJECT	Xylosome — Linea HS 16k rig (H. van Hoytema)