


SCENARIO 1 · OPENING

Five loading inside with both doors open, four in the runway

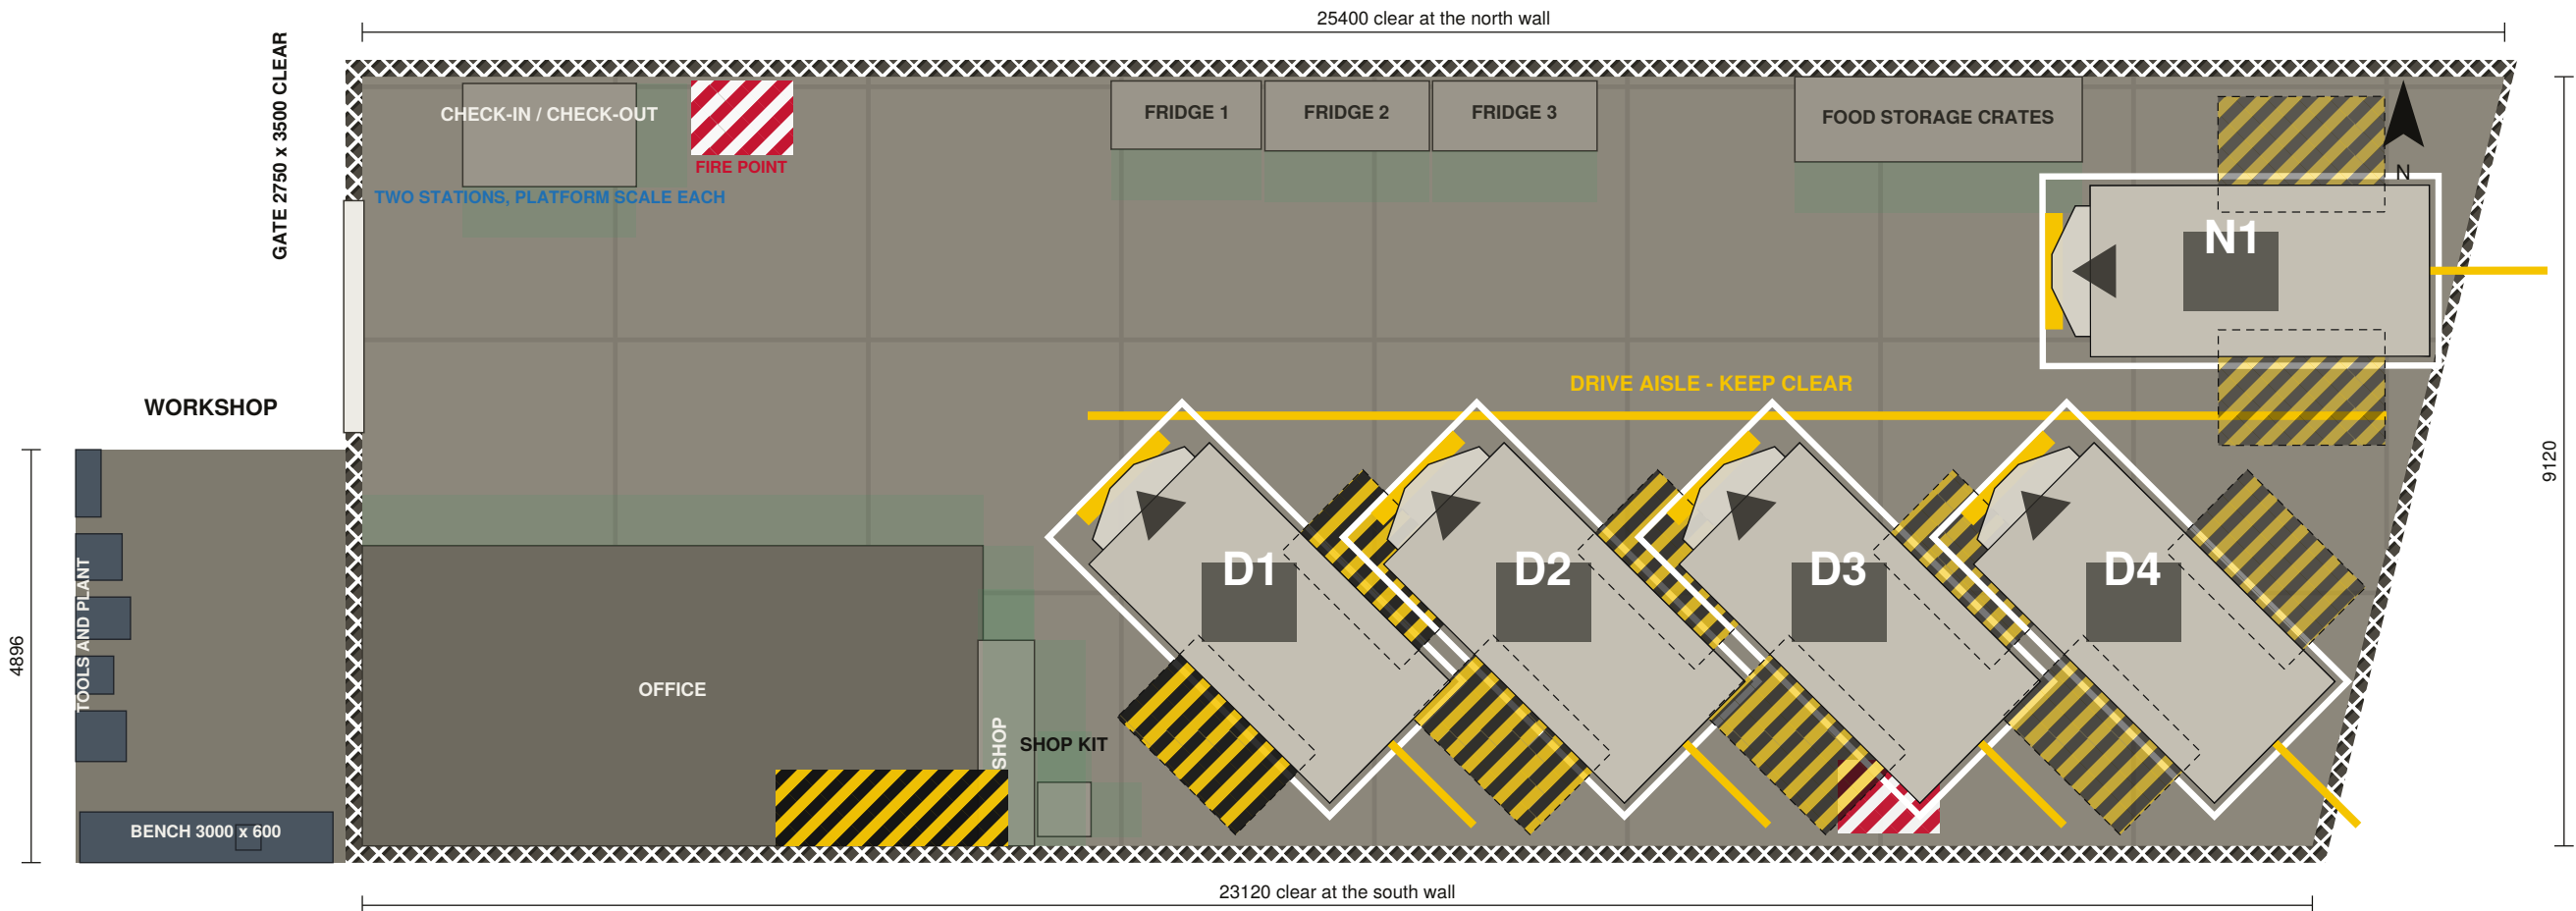

FLAGSHIPS INSIDE	5
HG3, THE CARGO VEHICLE	in the runway
WAITING IN THE RUNWAY	4
DOORS OPEN IN PLACE	both, the five inside
DIAGONAL PITCH	3494 mm at 45.2 deg
WORKING CLEARANCE	600 mm, all of it
DRIVE AISLE	2800 mm
ANY ORDER, NOBODY MOVES	yes, all five
TIGHTEST POINT DRIVING OUT	60 mm

FLOOR MARKING SCHEDULE	
	Black / yellow hatch Door swing. Keep clear. 1988 mm headroom.
	Yellow 100 mm Lead-in line and traffic lane edge.
	White 75 mm Vehicle stand outline and stand number.
	Blue 100 mm Weighing and loading zone, cold chain.
	Green tint 600 mm working strip at every fitting.
	Red / white hatch Fire point and electrical panel.

- DAILY SEQUENCE**
1. Morning. HG3 and three Flagships are already out in the runway, doors shut.
 2. Five stay inside to load: four on the diagonal and N1 against the east wall.
 3. Both doors open on all five, so they load together, then go to check-out.
 4. Any of the five leaves at any time - none of the other four has to move.
 5. As they clear, the runway four come in, load, and follow them out.

- NOTES**
- Five loading inside, four waiting in the runway. This is Warehouse Design V2 exactly as the model has it.
- The entry is clear. The diagonal now sits at v = 2318, nearly a metre south of the 8 September row, and nothing stands between the gate and the aisle.
- Any order, both doors, five vehicles. Each of the five was planned out of the gate with the other four still standing; tightest point on any of those runs is 60 mm.
- One caveat, and it is small: to let D1 out, D2 shuts its north door; D2 needs D3's; D3 needs D4's. D4 and N1 need nothing from anybody. That is one door for a few seconds, not a shuffle.
- The runway four keep their doors shut while they are outside. They open them when they come in, which is what Scenario 2 shows.