


DIAGONAL THREE

Both doors open, any vehicle out at any time

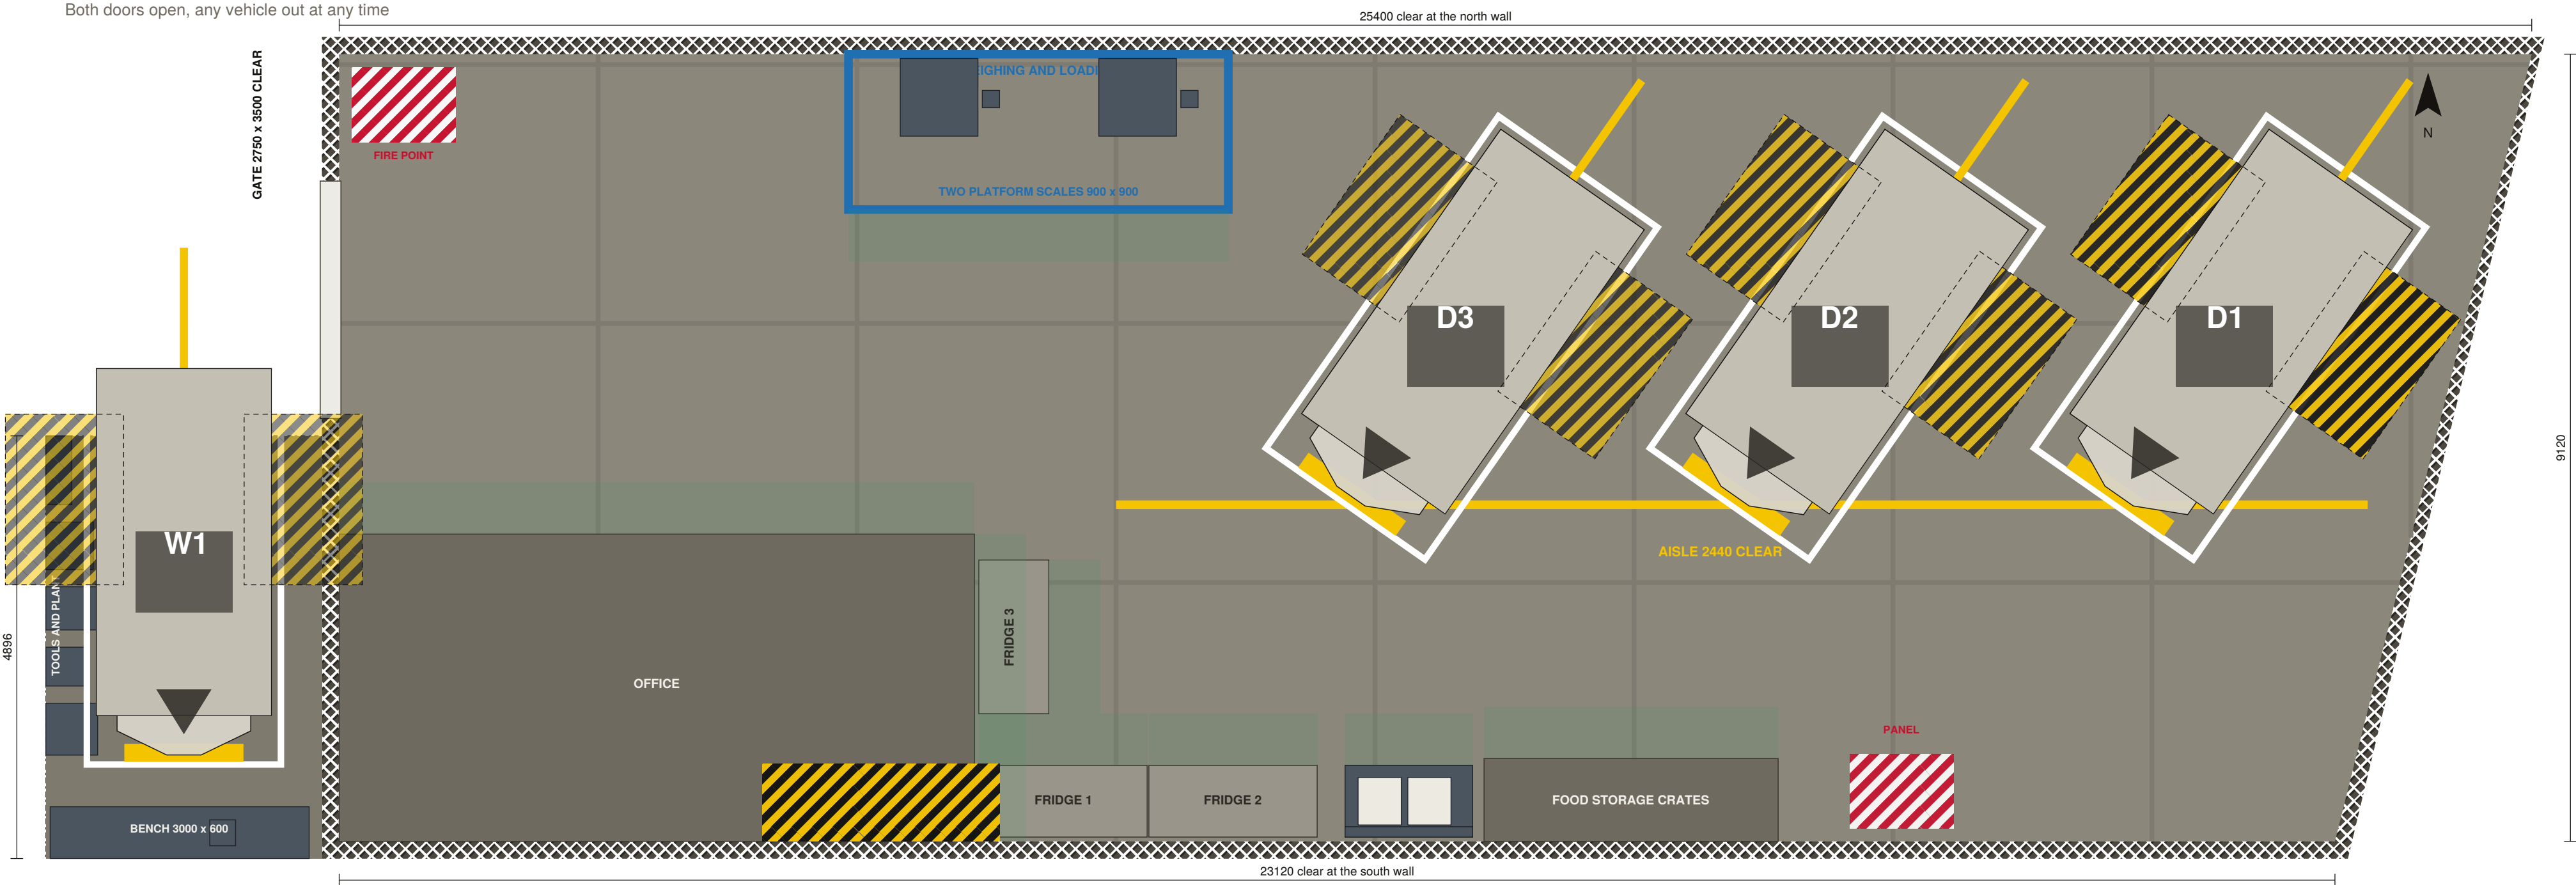

FLAGSHIPS INSIDE	3
PLUS THE WORKSHOP BAY	1
EVERY VEHICLE OPENS	both doors
STREET PITCH	4170 mm
CLEARANCE AT FITTINGS	600 mm minimum
DRIVE AISLE	2440 mm
ANY VEHICLE, ANY ORDER	yes
TIGHTEST POINT DRIVING OUT	45 mm

FLOOR MARKING SCHEDULE

	Black / yellow hatch Door swing. Keep clear. 1988 mm headroom.
	Yellow 100 mm Lead-in line and traffic lane edge.
	White 75 mm Vehicle stand outline and stand number.
	Blue 100 mm Weighing and loading zone, cold chain.
	Green tint 600 mm working strip at every fitting.
	Red / white hatch Fire point and electrical panel.

DAILY SEQUENCE

1. Three stands on the diagonal, at 145 degrees on a 4450 mm pitch.
2. Both doors open on all three at once. Load them together.
3. Any of the three leaves at any time. Nobody has to be moved.
4. Drive in forward, swing left, reverse onto the stand.
5. The south strip is the aisle. Keep it clear.

NOTES

- Three inside plus the workshop bay. This is the review's two constraints met exactly, and it is the most the shed will take with them.
- Four is not tight, it is impossible. The stand band is 14.9 m once the office, the third fridge and its working strip come off, and the closest two both-doors-open vehicles can ever be, at any angle, is 3950 mm. Four stands need 15.8 m.
- The diagonal is the right instinct: staggered 3650 mm along their axis, two vehicles with both doors open sit only 2200 mm apart across. That is the tightest packing there is.
- Every stand was driven out of the gate in simulation with the other two still standing, doors open. Tightest point on any of those runs is 45 mm.
- If the fleet grows past three inside, the loading formation has to move to the yard. See Scheme 4.