


Every metre of floor used, strict order in and out

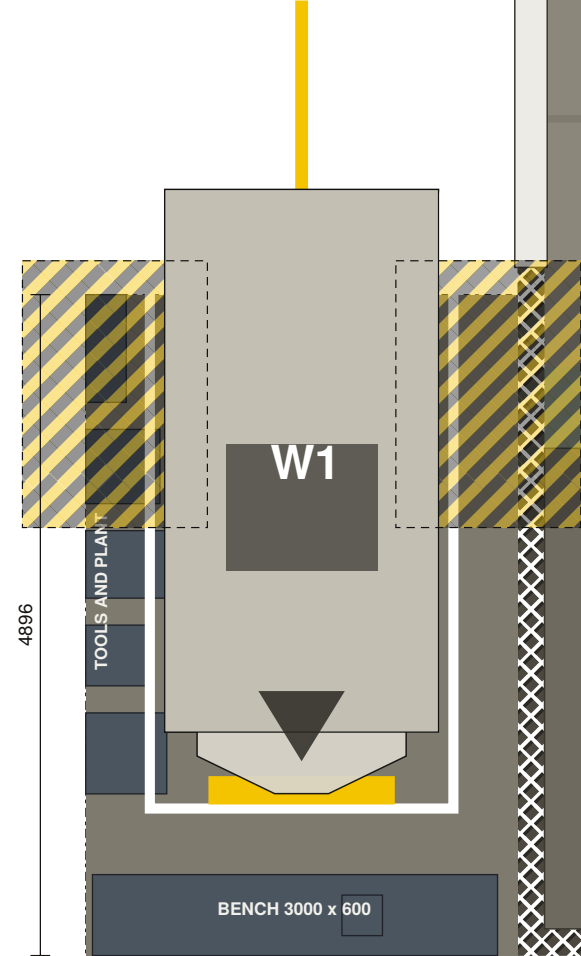

FLAGSHIPS INSIDE	8
PLUS THE WORKSHOP BAY	1
EVERY VEHICLE OPENS	1 door, in place
STREET PITCH	4170 mm
CLEARANCE AT FITTINGS	600 mm minimum
WALKWAY BETWEEN ROWS	1098 mm
TIGHTEST POINT DRIVING OUT	41 mm

FLOOR MARKING SCHEDULE

- | | |
|---|---|
|  | <p>Black / yellow hatch</p> <p>Door swing. Keep clear. 1988 mm headroom.</p> |
|  | <p>Yellow 100 mm</p> <p>Lead-in line and traffic lane edge.</p> |
|  | <p>White 75 mm</p> <p>Vehicle stand outline and stand number.</p> |
|  | <p>Blue 100 mm</p> <p>Weighing and loading zone, cold chain.</p> |
|  | <p>Green tint</p> <p>600 mm working strip at every fitting.</p> |
|  | <p>Red / white hatch</p> <p>Fire point and electrical panel.</p> |

DAILY SEQUENCE

1. Street A fills first, east to west, doors north over the weighing zone.
2. Street B next, doors south over the cold line.
3. Morning: all of A out west to east, then B out east to west.
4. B leaves through A's lane, so A has to be clear first. Order is fixed.
5. The north strip stays clear for weighing and loading all day.

NOTES

Eight inside plus the workshop bay. Every one of the nine was driven out of the gate in simulation, past everything still parked.

Two streets is the ceiling, not three. A third row can be parked but it cannot be driven out: it would have to thread the 2196 mm lane between street A and the scales, and the vehicle is 2028 mm wide.

There is no drive aisle. Each street is last in, first out, and B cannot leave until the first two of A have gone.

1098 mm of walkway between the two streets, a real gap rather than a painted line.

Each nose tucks 306 mm under the canopy of the vehicle ahead. That is what puts a 4476 mm vehicle on a 4170 mm pitch.