


RANK AND AISLE

Every stand reached without moving another vehicle

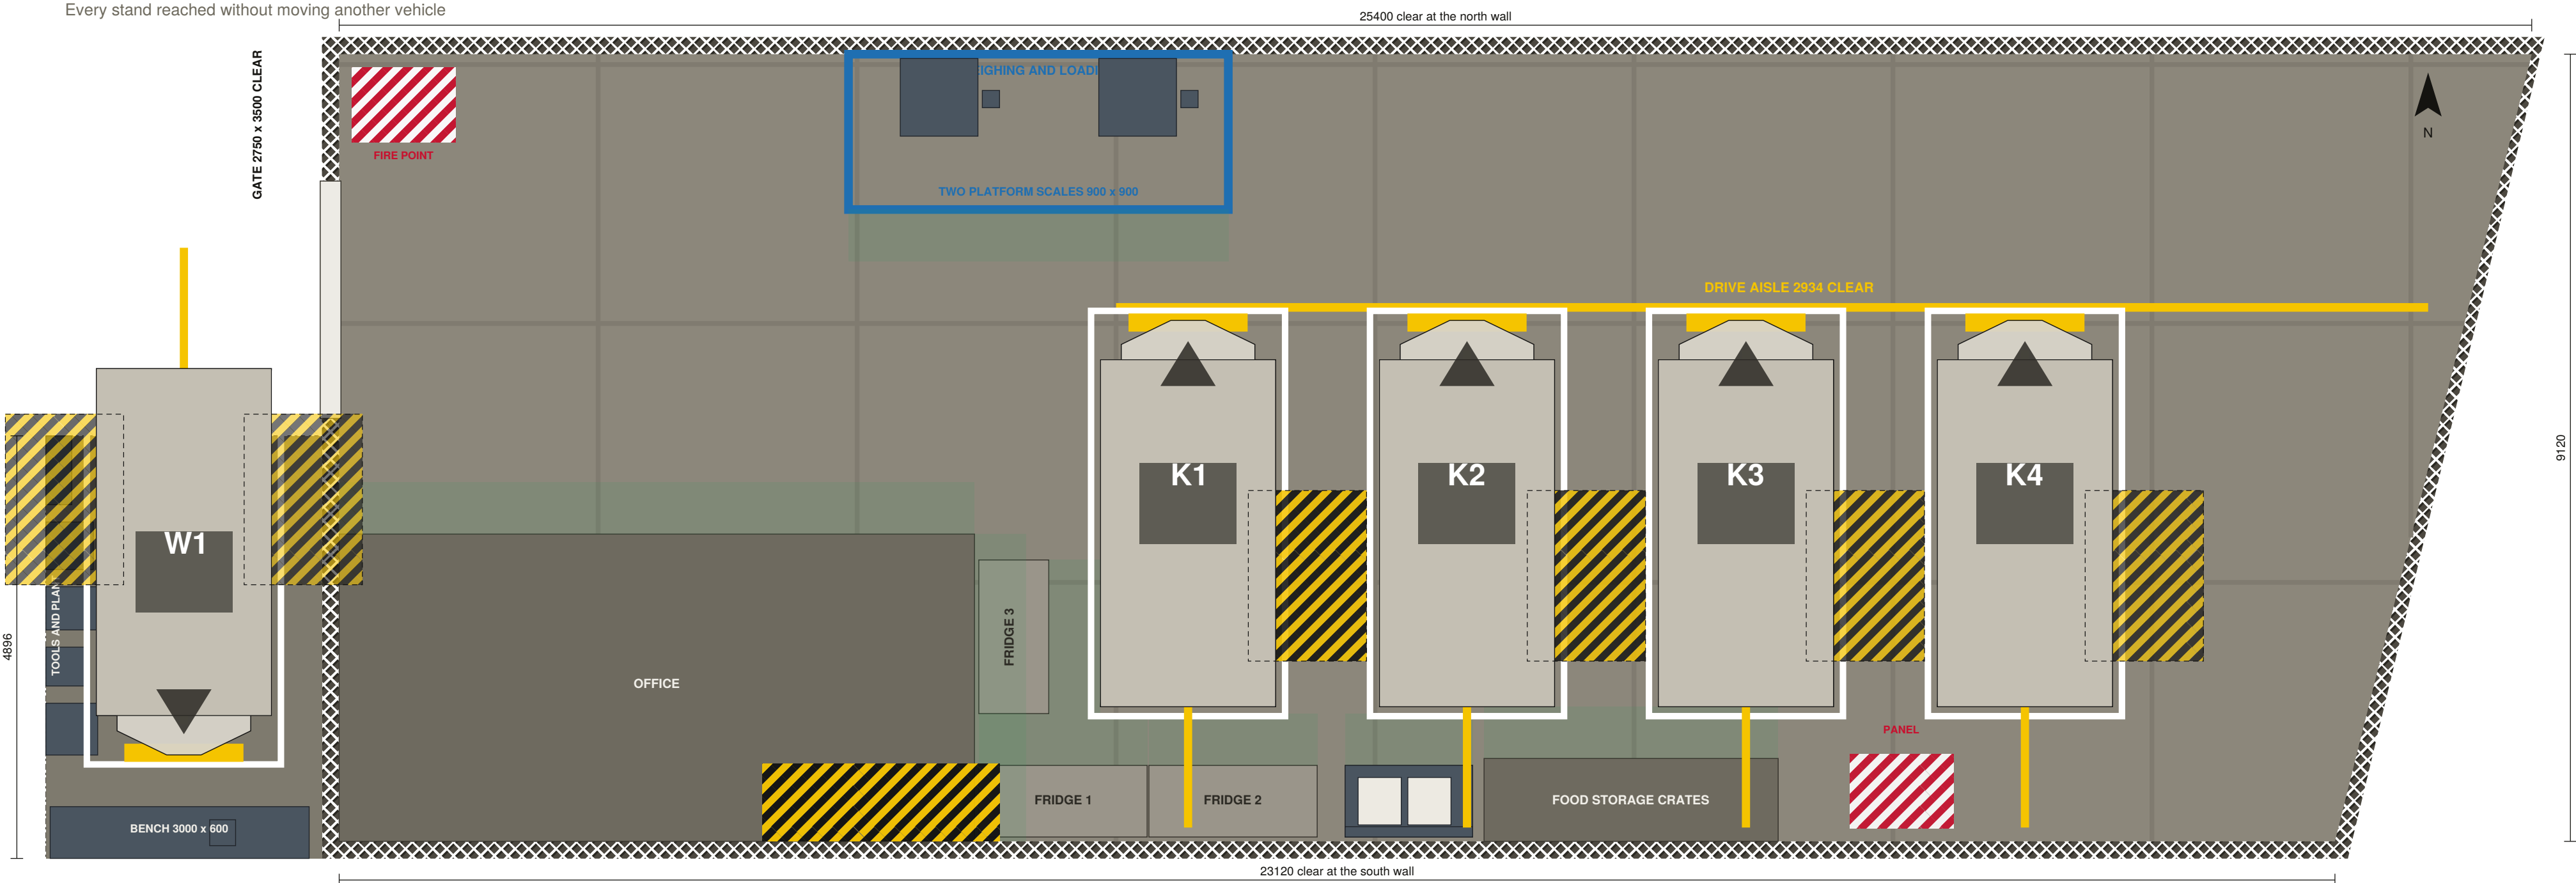

FLAGSHIPS INSIDE	4
PLUS THE WORKSHOP BAY	1
EVERY VEHICLE OPENS	1 door, in place
STREET PITCH	4170 mm
CLEARANCE AT FITTINGS	600 mm minimum
DRIVE AISLE	2934 mm
TIGHTEST POINT DRIVING OUT	58 mm

FLOOR MARKING SCHEDULE

	Black / yellow hatch Door swing. Keep clear. 1988 mm headroom.
	Yellow 100 mm Lead-in line and traffic lane edge.
	White 75 mm Vehicle stand outline and stand number.
	Blue 100 mm Weighing and loading zone, cold chain.
	Green tint 600 mm working strip at every fitting.
	Red / white hatch Fire point and electrical panel.

DAILY SEQUENCE

1. Drive in, turn into the aisle, reverse into any free stand.
2. Any stand can be taken or vacated at any time.
3. Doors all open east; the end stand opens into free floor.
4. Weighing and loading runs on the north strip, undisturbed.
5. Pull a vehicle onto the aisle to open both doors for service.

NOTES

Four inside plus the workshop bay. The least dense of the four and the only one with genuinely independent access.

A 2934 mm drive aisle runs the length of the hall, so any vehicle can leave or return at any time without moving another.

Stands are at 3232 mm centres, which is what one open door needs: 2068 mm of door plus 1014 mm of neighbour plus 150 mm.

The turn out of a stand into the aisle is the tightest move in any of these schemes. It is a single left hand sweep at the 3158 mm rear axle radius, and it uses the full width of the aisle.

Choose this if vehicles return at scattered times and the fleet stays at four or five.