



REMOTE MEASUREMENT NODE – HARDWARE SCHEMATIC

DUAL NTC TEMPERATURE MEASUREMENT INTERFACE

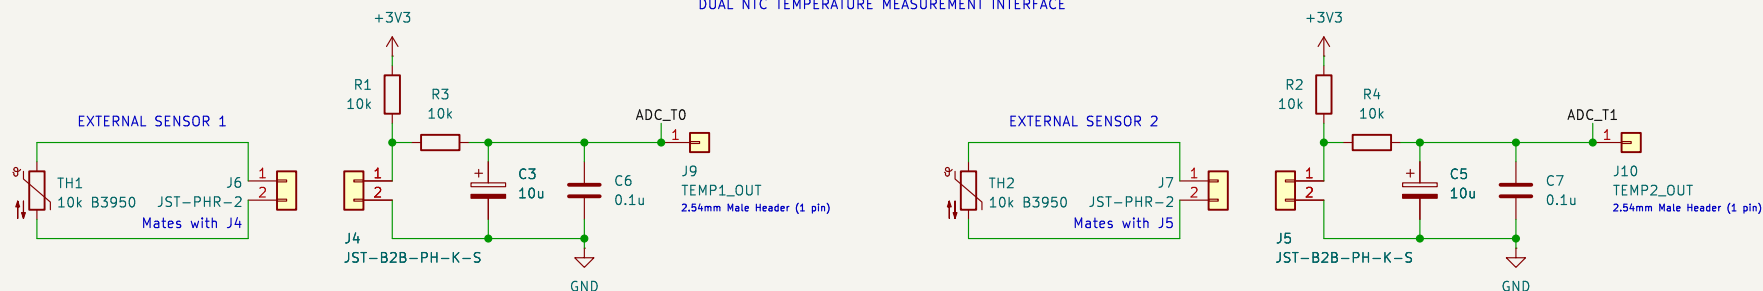

MCU MODULE STM32F103C8T6 "Blue Pill" SOCKET

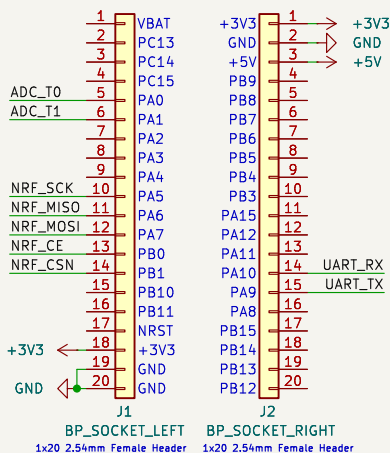


DESIGN NOTES:
 - Carrier board provides parallel breakout headers for all module socket pins.
 - Breakout headers used for Dupont wiring and prototyping.

Single-sheet functional schematic.
 Pin mapping reflects firmware configuration.

Revision History


Rev	Date	Description
A	2026-02-11	Initial version
B	2026-03-17	Reduce ADC RC filter (470 μ F $\rightarrow$ 10 μ F) to improve startup settling

INTERCONNECT HARNESS (PLUG-IN, SEMI-PERMANENT)

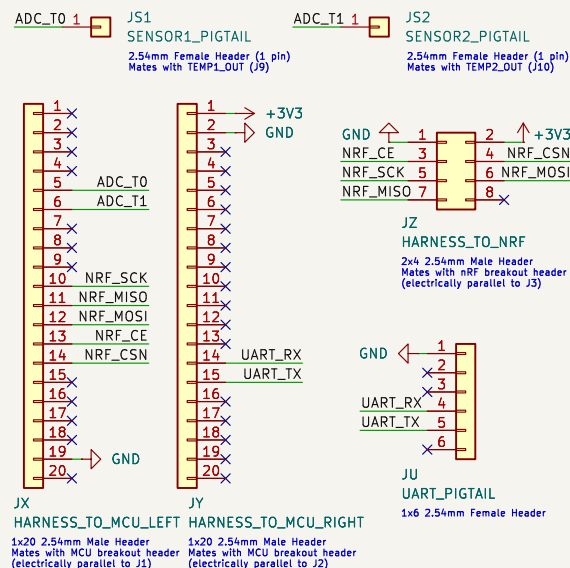


Harness GND wiring:
 Only two ground conductors installed internally (JX-19 $\rightarrow$ JU-1 and JY-2 $\rightarrow$ JZ-1).
 All grounds become common after connection to MCU ground plane.

2.4 GHZ RF TRANSCEIVER MODULE NRF24L01+ PA/LNA SOCKET

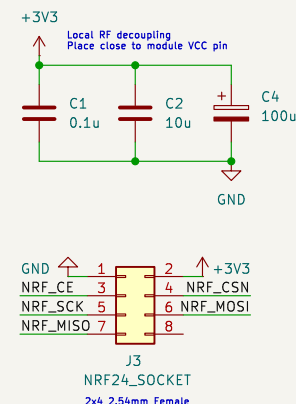

5V USB POWER INPUT



Remote measurement node - Rev B prototype

Jani Honkanen

Sheet: /

File: temp_logger_remote.kicad_sch

Title: STM32 nRF24 Temperature Logger - Remote Node

Size: A4 Date: 2026-03-17

KiCad E.D.A. 9.0.7

Rev: B

Id: 1/1