



REMOTE MEASUREMENT NODE – HARDWARE SCHEMATIC


DUAL NTC TEMPERATURE MEASUREMENT INTERFACE

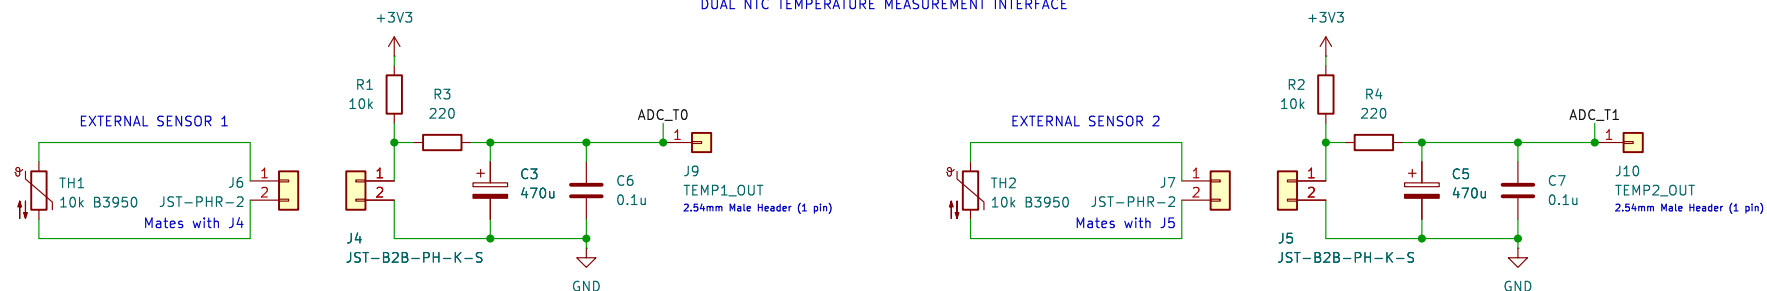

MCU MODULE STM32F103C8T6 "Blue Pill" SOCKET

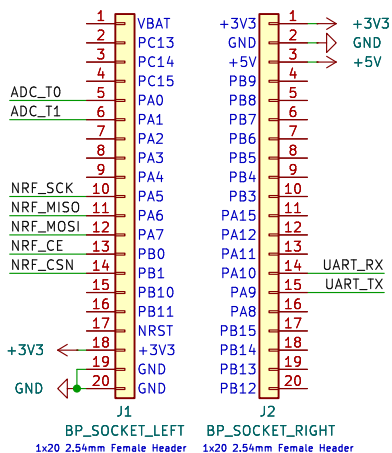


INTERCONNECT HARNESS (PLUG-IN, SEMI-PERMANENT)

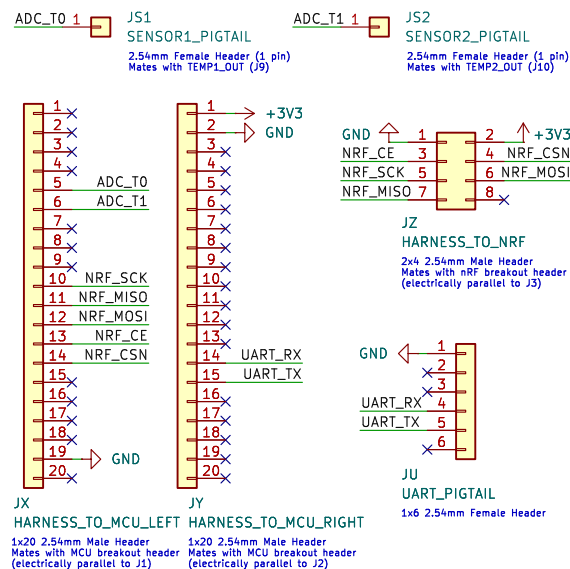


Harness GND wiring:
Only two ground conductors installed internally (JX-19→JU-1 and JY-2→JZ-1).
All grounds become common after connection to MCU ground plane.

2.4 GHZ RF TRANSCEIVER MODULE NRF24L01+ PA/LNA SOCKET

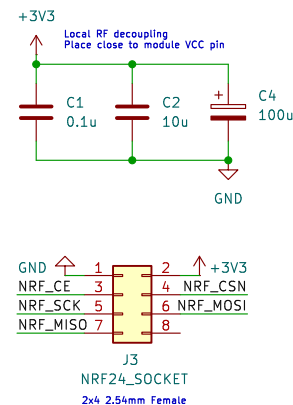

5V USB POWER INPUT



Single-sheet functional schematic.
Pin mapping reflects firmware configuration.

DESIGN NOTES:
- Carrier board provides parallel breakout headers for all module socket pins.
- Breakout headers used for Dupont wiring and prototyping.

Remote measurement node - Rev A prototype

Jani Honkanen

Sheet: /

File: temp_logger_remote.kicad_sch

Title: STM32 nRF24 Temperature Logger - Remote Node

Size: A4 Date: 2026-02-11

KiCad E.D.A. 9.0.7

Rev: A

Id: 1/1