
Case:02 Two Switch and 2 PCS

```
Switch>
Switch>enable
Switch#config t
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#! Create VLAN 2
Switch(config)#vlan 2
Switch(config-vlan)#name VLAN0002
Switch(config-vlan)#exit
Switch(config)#! Assign Port 1 to VLAN 1(Access Port)
Switch(config)#interface FastEthernet 0/1
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 1
Switch(config-if)#exit
Switch(config)#! Configure the Trunk Link to Switch 1
Switch(config)#interface FastEthernet 0/24
Switch(config-if)#switchport mode trunk

Switch(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/24, changed state to down

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/24, changed state to up

Switch(config-if)#exit
```

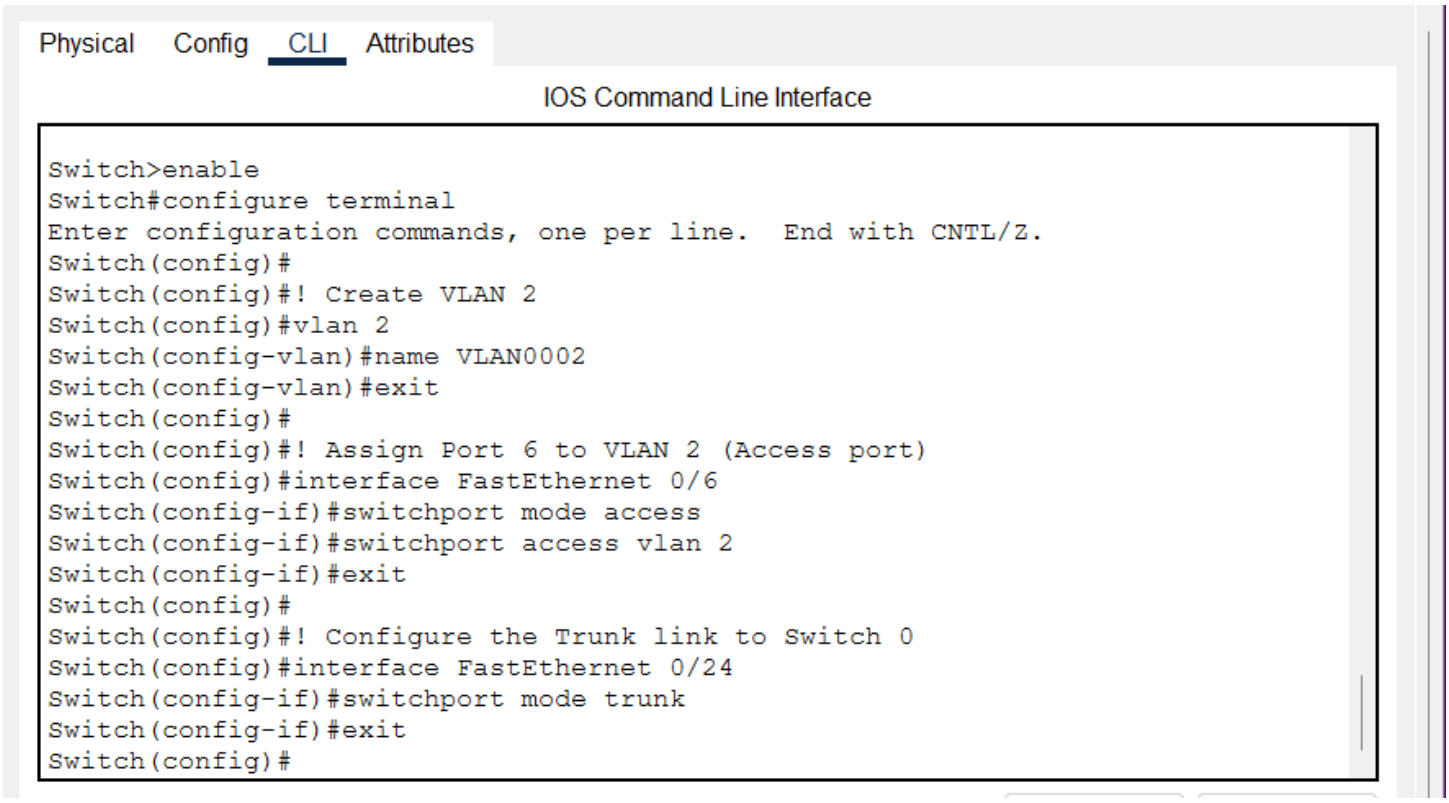


```
Name: Fa0/24
Switchport: Enabled
Administrative Mode: trunk
Operational Mode: trunk
Administrative Trunking Encapsulation: dot1q
Operational Trunking Encapsulation: dot1q
Negotiation of Trunking: On
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
Voice VLAN: none
Administrative private-vlan host-association: none
Administrative private-vlan mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q
Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs: none
 --More--
```

Case: 01 One Switch and 2 PCS

```
Switch#show vlan brief

VLAN Name                              Status    Ports
---- --------------------------------- --------- -------------------------------
1    default                           active    Fa0/1, Fa0/2, Fa0/3, Fa0/4
                                                 Fa0/5, Fa0/7, Fa0/8, Fa0/9
                                                 Fa0/10, Fa0/11, Fa0/12, Fa0/13
                                                 Fa0/14, Fa0/15, Fa0/16, Fa0/17
                                                 Fa0/18, Fa0/19, Fa0/20, Fa0/21
                                                 Fa0/22, Fa0/23, Fa0/24, Gig0/1
                                                 Gig0/2
2    VLAN0002                          active    Fa0/6
1002 fddi-default                      active
1003 token-ring-default                active
1004 fddinet-default                   active
1005 trnet-default                     active
Switch#
```

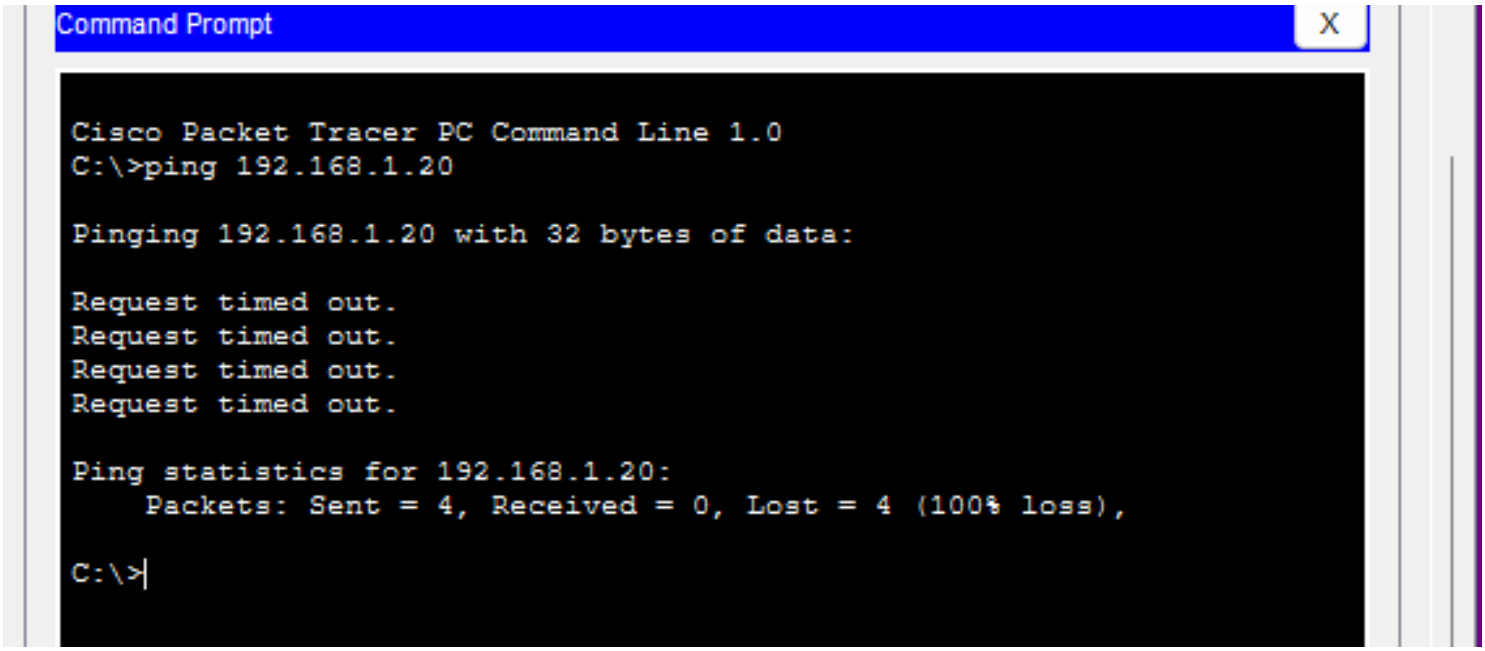


```
Switch#show mac-address-table
          Mac Address Table
-------------------------------------------

Vlan    Mac Address       Type        Ports
----    -----------       --------    -----

   1    000d.bd23.755e    DYNAMIC     Fa0/1
Switch#
```