


# DIN Rail (Main DIN)

## Technical Specifications

The DIN Rails are power and communication hubs of the NoTraffic™ AI Mobility Platform. The Main DIN Rail will be used in all deployments, regardless of the power to the Sensor Units.

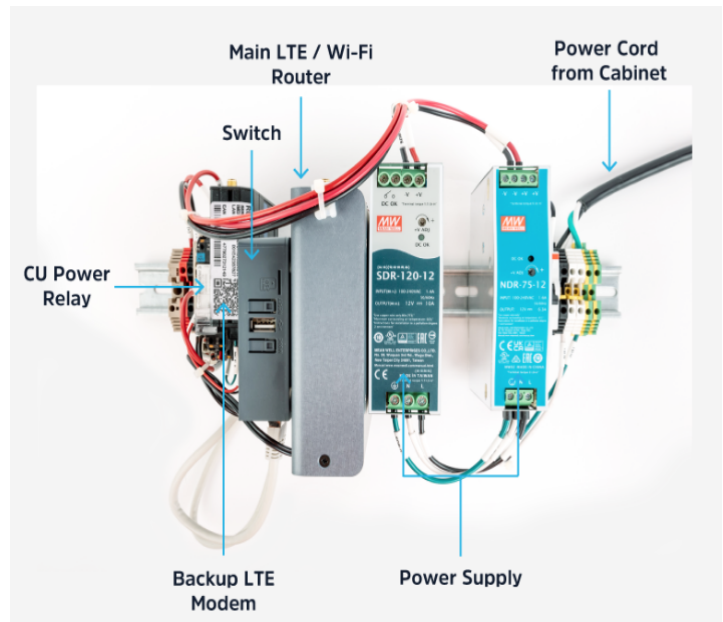

	Specifications and Features
<b>Temp &amp; Humidity</b>	-30°F to +165°F, up to 95 % RH per NEMA TS2 (-34.4 degree celsius + 73.8 degree celsius)
<b>Dimensions</b>	L 14"
<b>DIN Rail</b>	TS 35 X 7.5 slotted DIN Rail
<b>Weight</b>	3 lbs
<b>Regulatory</b>	FCC
<b>Communication</b>	3G/4G
<b>Wi-Fi</b>	Wi-Fi – IEEE 802.11a/n/ac 5GHz
<b>Power</b>	89V-264 VAC 50/60Hz from Cabinet
<b>Max Consumption</b>	40W
<b>Mounting</b>	8" spacing for Mounting in NEMA Cabinets with T-Nuts
<b>Switch</b>	Five 10/100/1000 Ethernet ports