


Brushless Flat Motor 45BLW29-E

with Encoder

Ø 45mm

0,13Nm

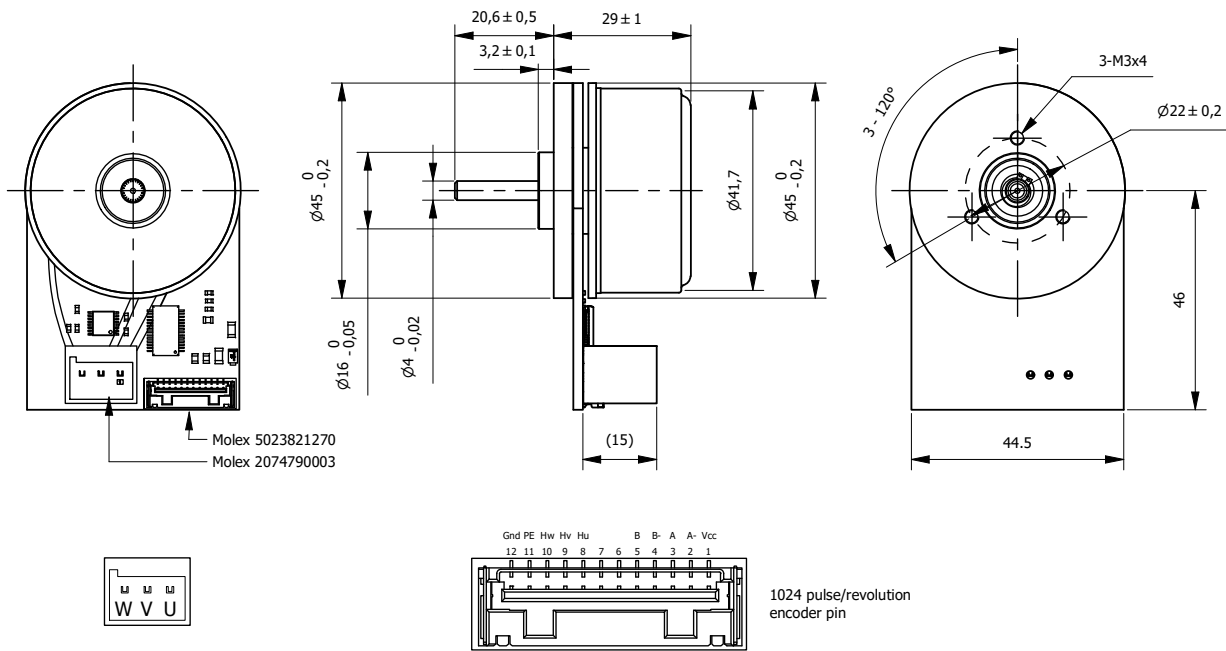

Specification		
Model		45BLW29-E
1	n° of Pole	16
2	n° of Phase	3
3	Rated Voltage	V 24
4	Rated Speed	rpm 4840
5	Rated Torque	Nm 0,13
6	Max. Peak Torque	Nm 0,39
7	Torque Constant	Nm/A 0,037
8	Rated Current	A 3,5
9	Max. Peak Current	A 10
10	No-Load Current	mA 500
11	Line to Line Resistance	Ω 0,56
12	Line to Line Inductance	mH 0,27
13	Rotor Inertia	gcm2 181
14	Length (L)	mm 29
15	Weight	Kg 0,16

Characteristics	
Item	
Encoder Type*	Magnetic - Incremental 1024 CPR / 2 channels
Hall Effect Angle	120°
Shaft run out	0,025mm
Insulation Class	B
Protection Class	IP40
Radial play (at 4N)	0,02mm
Axial play (at 4N)	0,14mm
Max. Radial force (10mm from flange)	28N
Max. Axial force	10N
Dielectric strength (for 1 sec.)	600 VAC
Insulation Resistance (min. 500 VDC)	100 Mohm
*programmable	

Connection	
Pin n°	Function
Feedback	
1	VCC
2	EA-
3	EA
4	EB-
5	EB
8	HALL A
9	HALL B
10	HALL C
11	PE
12	GND
Motor	
1	Phase U
2	Phase V
3	Phase W