


Brushless Flat Motor 45BLW

Wires

Ø 45mm

0,05 - 0,13Nm

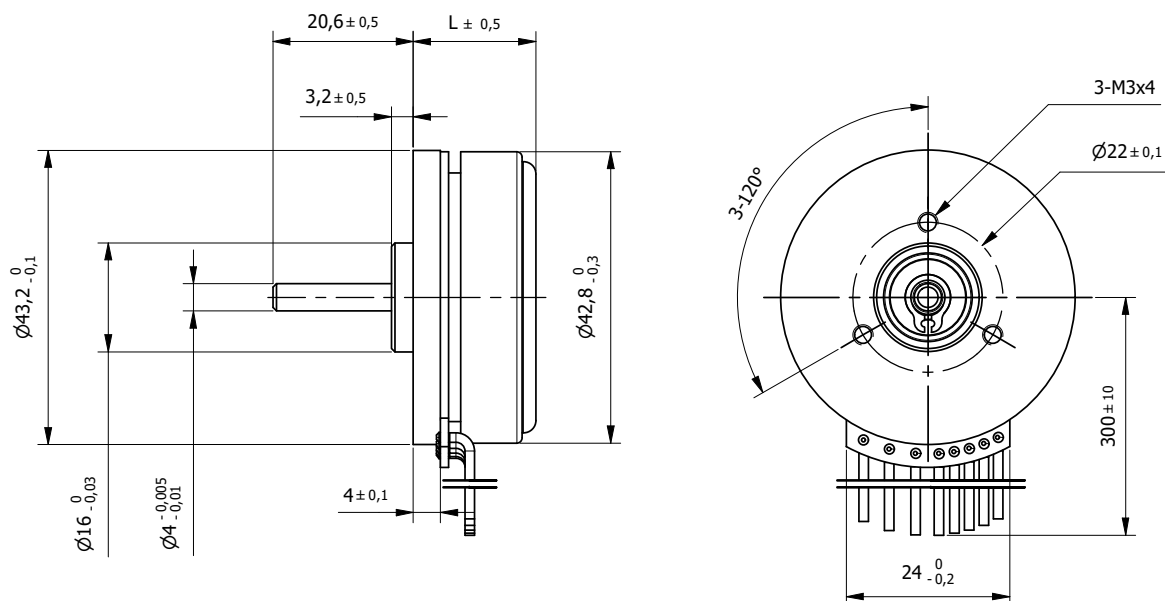

Specification				
	Model	45BLW18	45BLW21	45BLW27
1	n° of Pole	16	16	16
2	n° of Phase	3	3	3
3	Rated Voltage	V	24	24
4	Rated Speed	rpm	5000	5260
5	Rated Torque	Nm	0,05	0,084
6	Max. Peak Torque	Nm	0,15	0,25
7	Torque Constant	Nm/A	0,031	0,033
8	Rated Current	A	1,61	2,55
9	Max. Peak Current	A	4,8	7
10	No-Load Current	mA	250	380
11	Line to Line Resistance	Ω	1,83	0,8
12	Line to Line Inductance	mH	0,59	0,33
13	Rotor Inertia	gcm2	99	135
14	Length (L)	mm	18	21
15	Weight	Kg	0,08	0,12

Characteristics	
Item	
Hall Effect Angle	120°
Shaft run out	0,03mm
Insulation Class	B
Protection Class	IP40
Radial play (450g load)	0,02mm
Axial play (450g load)	0,14mm
Max. Radial force (10mm from flange)	28N
Max. Axial force	10N
Dielectric strength (for 1 sec.)	600 VAC
Insulation Resistance (min. 500 VDC)	100 Mohm

Connection			
Lead n°	Color	Gauge	Function
1	Red	UL1430 AWG24	Vcc Hall +5 to +24 Vdc
2	Blue		Hall A
3	Green		Hall B
4	White		Hall C
5	Black		GND Hall
6	Grey		Phase U
7	Brown		Phase V
8	Yellow		Phase W