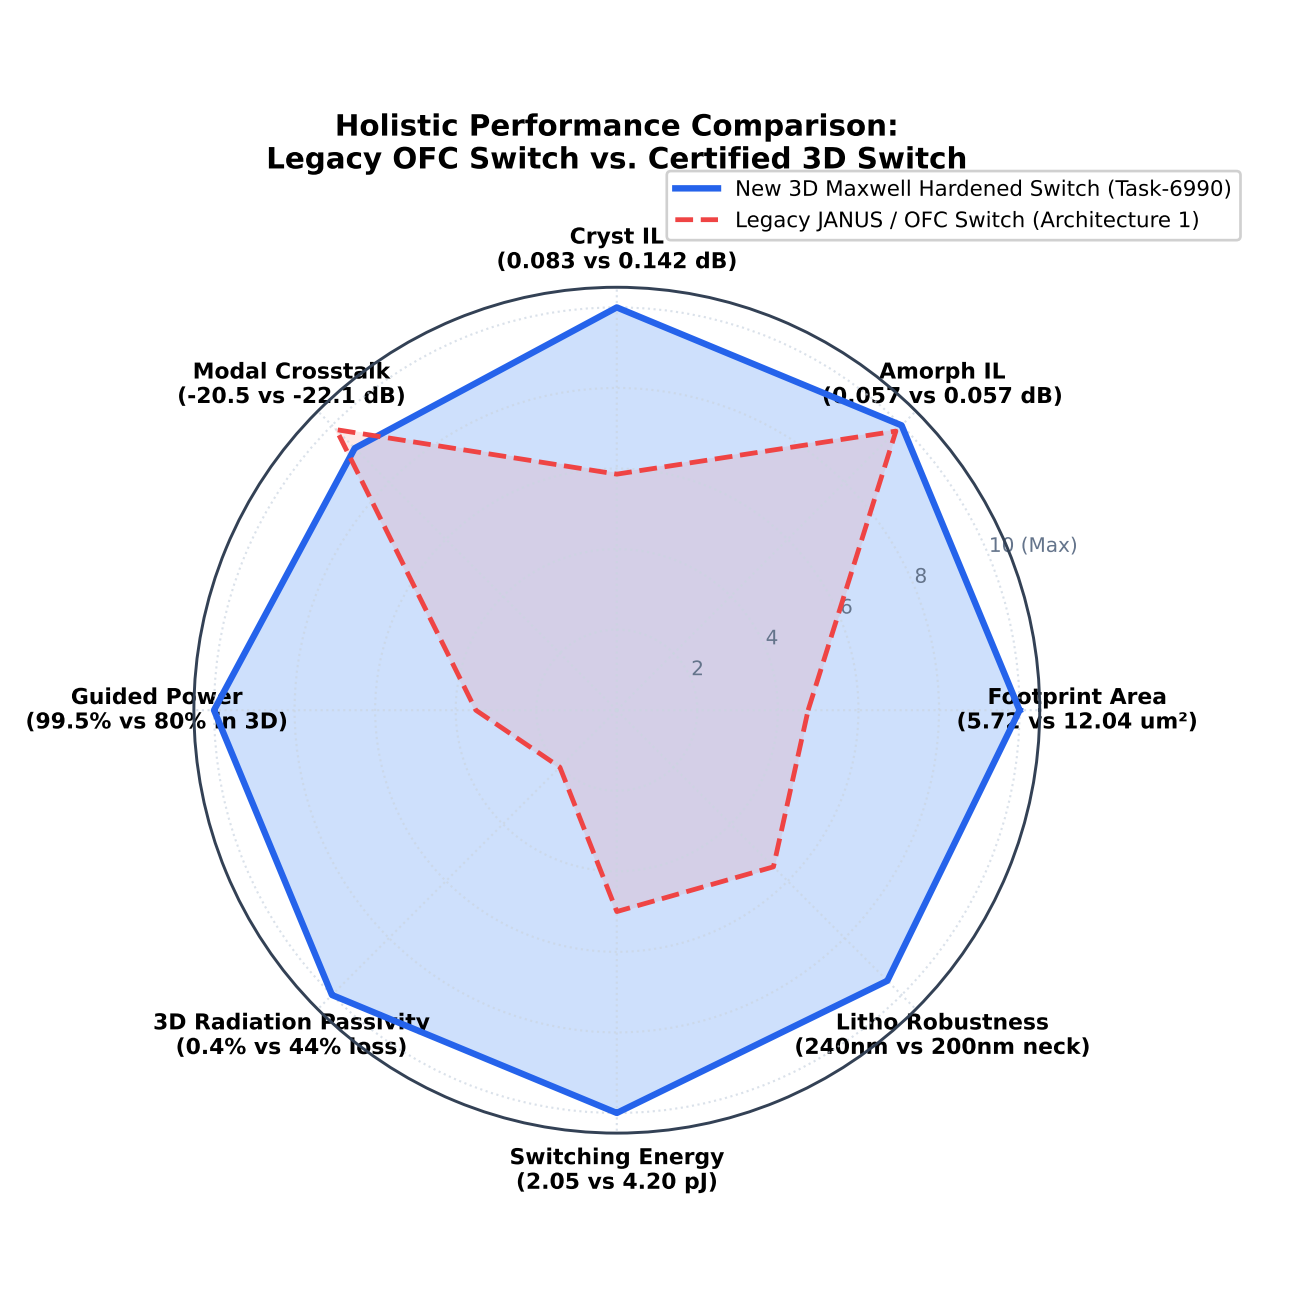
Holistic Performance Comparison:
Legacy OFC Switch vs. Certified 3D Switch
New 3D Maxwell Hardened Switch (Task-6990)
Legacy JANUS / OFC Switch (Architecture 1)
Cryst IL
(0.083 vs 0.142 dB)
Amorph IL
(0.057 vs 0.057 dB)
Footprint Area
(5.72 vs 12.04 um²)
Litho Robustness
(240nm vs 200nm neck)
Switching Energy
(2.05 vs 4.20 pJ)
3D Radiation Passivity
(0.4% vs 44% loss)
Guided Power
(99.5% vs 80% in 3D)
Modal Crosstalk
(-20.5 vs -22.1 dB)
2
4
6
8
10 (Max)