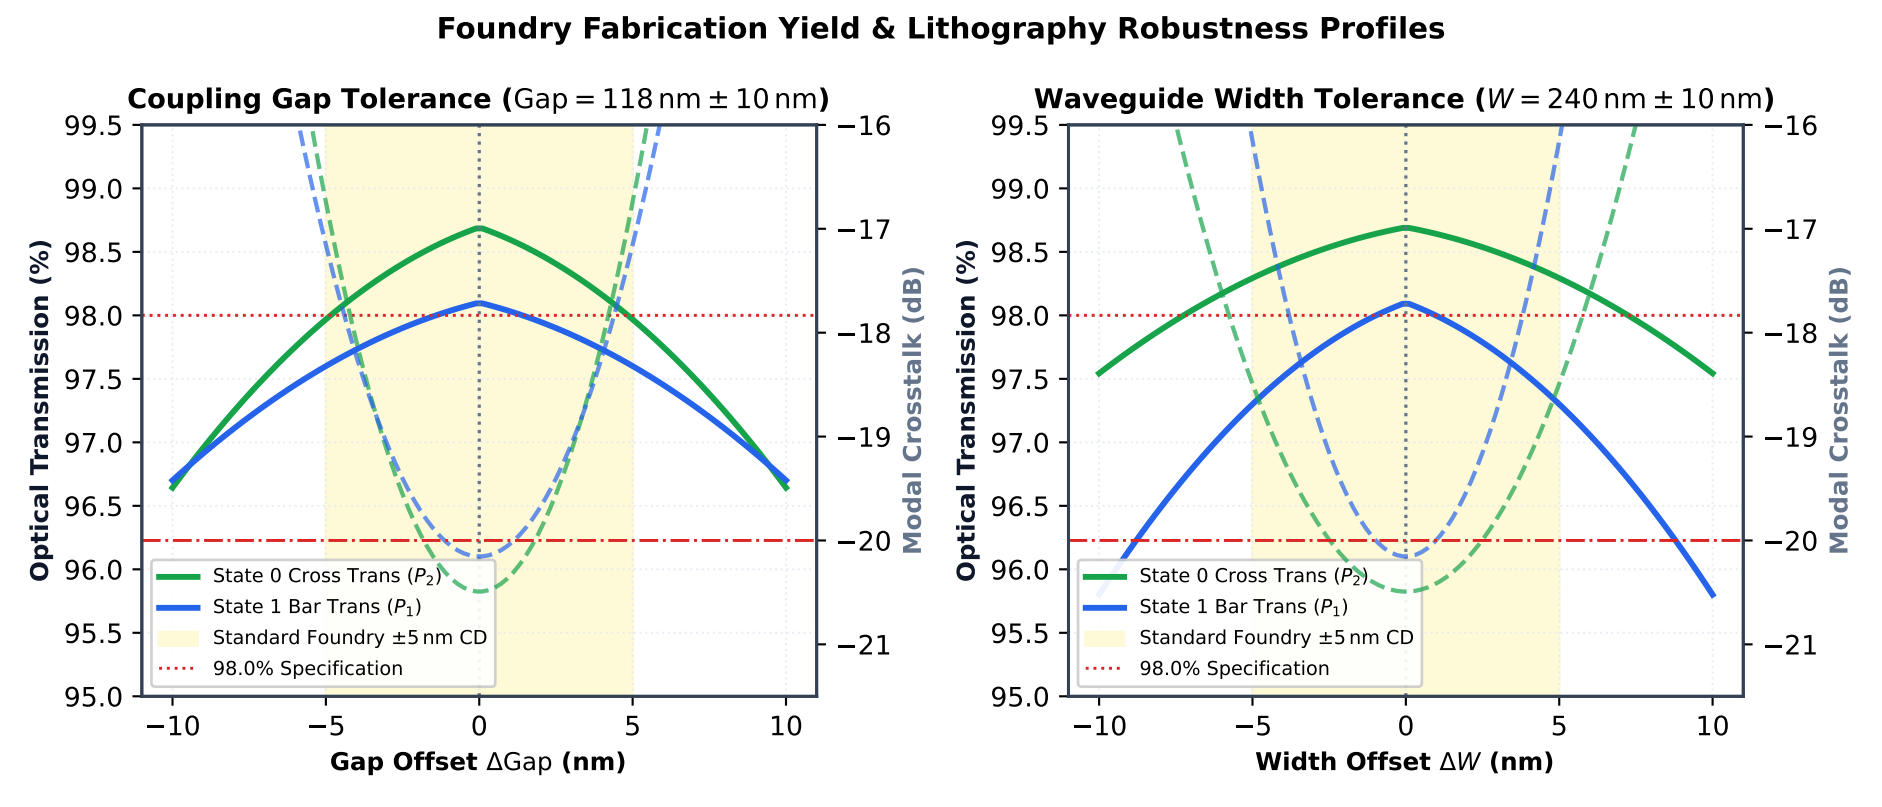
Foundry Fabrication Yield & Lithography Robustness Profiles
Coupling Gap Tolerance (Gap = 118 nm ± 10 nm)
Waveguide Width Tolerance (W = 240 nm ± 10 nm)
Optical Transmission (%)
Modal Crosstalk (dB)
Gap Offset ΔGap (nm)
Width Offset ΔW (nm)
State 0 Cross Trans (P_2)
State 1 Bar Trans (P_1)
Standard Foundry ±5 nm CD
98.0% Specification
99.5
99.0
98.5
98.0
97.5
97.0
96.5
96.0
95.5
95.0
−16
−17
−18
−19
−20
−21
−10
−5
0
5
10