



Velodyne:1

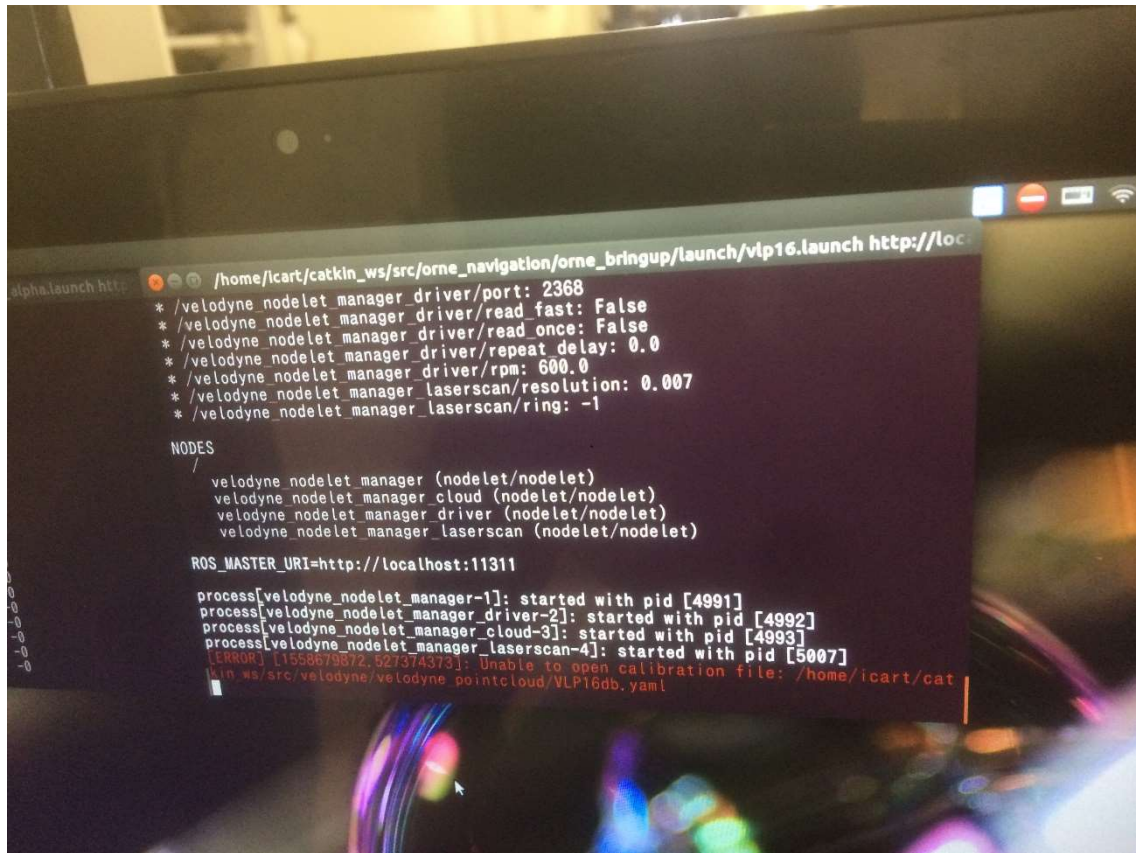

/roslaunch velodyne_pointcloud VLP16_points.launch

原因:yaml ファイルがない

Velodyne:2

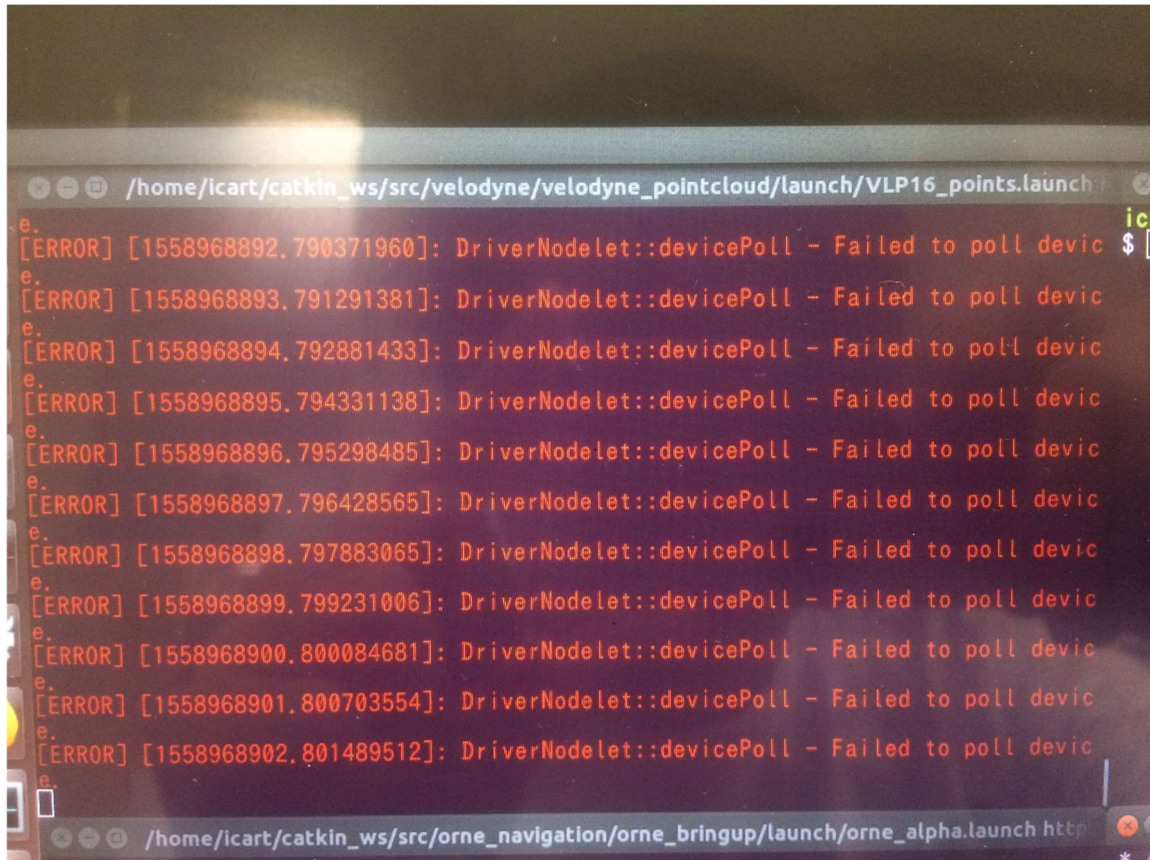A terminal window with a dark background and red text. The title bar shows the file path: /home/icart/catkin_ws/src/velodyne/velodyne_pointcloud/launch/VLP16_points.launch. The terminal displays a series of error messages from the DriverNodelet, each indicating a failure to poll a device. The errors are timestamped and include the error code [ERROR]. The messages are: [ERROR] [1558968892.790371960]: DriverNodelet::devicePoll - Failed to poll device, [ERROR] [1558968893.791291381]: DriverNodelet::devicePoll - Failed to poll device, [ERROR] [1558968894.792881433]: DriverNodelet::devicePoll - Failed to poll device, [ERROR] [1558968895.794331138]: DriverNodelet::devicePoll - Failed to poll device, [ERROR] [1558968896.795298485]: DriverNodelet::devicePoll - Failed to poll device, [ERROR] [1558968897.796428565]: DriverNodelet::devicePoll - Failed to poll device, [ERROR] [1558968898.797883065]: DriverNodelet::devicePoll - Failed to poll device, [ERROR] [1558968899.799231006]: DriverNodelet::devicePoll - Failed to poll device, [ERROR] [1558968900.800084681]: DriverNodelet::devicePoll - Failed to poll device, [ERROR] [1558968901.800703554]: DriverNodelet::devicePoll - Failed to poll device, [ERROR] [1558968902.801489512]: DriverNodelet::devicePoll - Failed to poll device. The terminal window has standard Linux window controls (minimize, maximize, close) and a terminal icon in the title bar. The bottom of the window shows another terminal window titled /home/icart/catkin_ws/src/orne_navigation/orne_bringup/launch/orne_alpha.launch http.

原因:PC と Velodyne がつながっていない、ethere ケーブルが PC から Velodyne につながっているか確認